

2010/11

CATALOGUE



Glow Plugs • Spark Plugs





Glow Plugs • Spark Plugs

CATALOGUE

Car • SUV • LCV	page	1
Commercial Vehicles	page	44
Motor Cycles	page	49
Marine		
• Inboard	page	75
• Jet Ski	page	76
• Outboard	page	78
Garden Equipment		
• Blower	page	91
• Brush Cutters	page	92
• Chainsaw	page	95
• Lawn Mowers	page	101
• Power Pruner	page	105
• Ride-On Mowers	page	106
Commercial & Industrial Engines		
• Construction Machine	page	108
• Cut Off Saw	page	109
• Farm Equipment	page	110
• Gasoline Engines	page	111
• General Purpose	page	112
• Generator	page	113
• Lawn Mower Engines	page	116
• Multi-purpose Engines	page	117
• Pumps	page	122
Glow Plugs Conversion Chart	page	124
• Beru • Bosch • Champion • Denso • HKT		
NGK Glow Plug Types and Features	page	128
Temperature Characteristics	page	130
Testing of NGK Glow Plug	page	131
New Series of Glow Plugs	page	132
Series of NGK Glow Plugs	page	133
Structure of a Glow Plug	page	146
Design Symbols used in NGK Glow Plugs	page	147
Glow Plug Trouble Tracing	page	148
Glow Plug Fault Finding	page	149
NGK Spark Plug Resistor Covers	page	150
Spark Plug Conversion Chart	page	154
• AC • Autolite • Bosch • Brisk • Champion • Denso • Eyquem		
• Motorcraft • Torch • Discontinued and Replacement Plugs		
Series of NGK Spark Plugs	page	168
Structure of a NGK Spark Plug	page	179
NGK Spark Plug Information chart	page	180
NGK Spark Plug Diagnostic Chart	page	181



NGK





MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
APRILLA							APRILLA	
125	MOJITO	125	2005->			0.8	CR9E	
125	RS EXTREME,REPLI.	125	1996->	1		0.8	BR8ES	
125	MX	125	2004->			0.8	BR8EIX	
250	RS	250	1999->	2		0.8	BR9ECM	
400	SCARABEO	400	2007->			0.8	CR7EKB	
450	RXV	450	2007->			0.8	CR8EKB	
450	RXV ENDOR SUPERMOTO	450	2006->			0.8	CR8EB	
450	SXV 4.5	450	2007->			0.8	CR8EKB	
550	RXV 5.5	550	2007->			0.8	CR8EKB	
650	PEGASO	650	2007->			0.8	CR7E	
650	PEGASO ML,MX,GA	650	1997->	1		0.7	DR8EA	
650	PEGASO TRIAL	650	2006->			0.8	CR7E	
660	PEGASO STRADA	660	2006->2009			0.8	CR7E	
750	SHIVER	750	2007->			0.8	CR7EKB	
750	SHIVER GT	750	2009->			0.8	CR7EKB	
850	MANA NA	850	2009->			0.8	CR7EKB	
1000	ETV CAPONORD	1000	2001->2004			0.8	DCPR9E	
1000	FALCO SL	1000	2000->	2		0.7	DCPR9EVX	DCPR9E
1000	RSR V4	1000	2007->			0.8	DCPR9E	
1000	RSV 1000R MILE	1000	1998->	2		0.7	DCPR9EVX	DCPR9E
1000	RSV41000R	1000	2010->			0.8	CR9EB	
1000	TUONO	1000	2004->2006			0.8	DCPR9E	
ARCTIC CAT							ARCTIC CAT	
50	ATV	50	2006->			0.8	CR7HSA	
90	ATV	90	2006->			0.8	CR7HSA	
250	ATV	250	1999->2005			0.7	DR7EA	
300	ATV	300	1998->2005			0.7	DR7EA	
400	ATV	400	2004->2006			0.8	CR7E	
500	ATV	500	1999->2006			0.8	CR6E	
650	ATV	650	2004->2006		V2 4X4 AUTO	0.8	CR7E	
650	ATV	650	2005->2006		HI 4X4 AUTO	0.8	CPR8E	
BMW							BMW	
125	SCOOTER	125	2000->	1		0.8	CR8EK	CR8E
200	C1 SCOOTER	175	2001->	1		0.8	CR8EK	CR8E
450	G450C	450	2008->			0.8	CR9EKB	
500	R50 & R51 SERIES 12.7MM REACH	500		2		0.7	B7HS	BR7HS
500	R50 & R51 SERIES 19.0MM REACH	500		2		0.8	B8ES	BR8ES
500	R50/5	500		2		0.8	BPR7ES	BP7ES
600	R60 & R69 SERIES 12.7MM REACH	600		2		0.8	B8HS	BR8HS
600	R60 & R69 SERIES 19.0MM REACH	600		2		0.8	B8ES	BR8ES
600	R60/5,6,7	600		2		0.8	BPR6ES	BP6ES
650	65	650		2		0.8	BPR7ES	BP7ES
650	F650 FUNDURO	650		2		0.8	BCP7ET	BCP7ES
650	F650 FUNDURO	650		2		0.7	D8EA	DR8EA
650	G650 XCHALLENGE XCOUNTRY XMOTO	650	2007->			0.8	DR8EB	
650	G650X CHALLENGE	650	2007->			0.8	DR8EB	
650	G650X COUNTRY	650	2007->			0.8	DR8EB	
750	K75C, K75S	750		2		0.7	D8EA	DR8EA
750	R75/5, R75/6, R75/7	750		2		0.8	BPR6ES	BP6ES
800	F 800R	800	2009->			0.8	DCPR8E	
800	F650GS	800	2008->			0.8	DCPR8E	
800	F800GS	800	2008->			0.8	DCPR8E	
800	F800S,ST	800	2006->			0.8	DCPR8E	
800	GS80	800		2		0.8	BPR6ES	BP6ES
800	R80/7, R80G, R80S	800		2		0.8	BPR6ES	BP6ES
850	R850R	850		2		0.8	BKR7EKC-N	
900	R90/6, R90S	900		2		0.8	BPR6ES	BP6ES
1000	GS100	1000		2		0.8	BPR6ES	BP6ES
1000	K100, K100RS, K100RT	1000		4		0.7	D8EA	DR8EA
1000	K100RSV	1000		4		0.7	D9EA	DR9EA
1000	R100/7, 100S, 100RS	1000		2		0.8	BPR6ES	BP6ES
1000	R100GS	1000	1985->			0.8	BP6EVX	BP6ES
1000	S1000RR	1000	2009->			0.8	LMAR9D-J	
1100	K1100LT	1100	1999->	4		0.7	DR7EA	
1100	R1100 S	1100	2003->			0.8	BKR7EKC+DCPR8EKC	
1100	R1100 RS	1100		2		0.8	BCP7ET	BCP7ES
1150	R1150GS,R,RT	1150	2000->	2		0.8	BKR7EKC+DCPR8EKC	
1150	R1150R,RT	1150	2001->2003			0.8	BKR7EKC	
1200	HP2 MEGAMOTO	1200	2007->			0.7	DCPR8EKC	DCPR8E



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
BMW								
1200	K1200/RS,LT	1200		4		0.8	BKR6EK	BMW
1200	K1200GT	1200	2006->			0.8	KR9CI	
1200	K1200R	1200	2006->			0.8	KR9CI	
1200	K1200R SPORT	1200	2007->			0.8	KR9CI	
1200	K1200RS	1200	1997->2003		RS	0.7	DCPR7E	
1200	K1200S	1200	2004->			0.8	KR9CI	
1200	R1200C	1200				0.8	BKR7EKC-N	
1200	R1200GS	1200	2005->			0.7	DCPR8EKC	DCPR8E
1200	R1200GS	1200	2009->			0.7	DCPR8EKC	DCPR8E
1200	R1200GS	1200	2010->			0.8	MAR8B-JDS	
1200	R1200R	1200	2007->			0.7	DCPR8EKC	DCPR8E
1200	R1200RT	1200	2006->			0.7	DCPR8EKC	DCPR8E
1200	R1200RT	1200	2009->			0.7	DCPR8EKC	DCPR8E
1200	R1200RT,ST	1200	2006->			0.7	DCPR8EKC	DCPR8E
1200	R1200S	1200	2006->			0.7	DCPR8EKC	DCPR8E
1200	R1200ST	1200	2006->			0.7	DCPR8EKC	DCPR8E
1300	K1300GT	1300	2009->			0.8	KR9CI	
1300	K1300R	1300	2009->			0.8	KR9CI	
1300	K1300S	1300	2009->			0.8	KR9CI	
BUELL								
1000	FIREBOLT XB9R	1000	2002->2007			0.8	DCPR8E	
1000	XB9S	1000	2003->2007			0.8	DCPR9E	
1000	XB9SX	1000	2006->2007			0.8	DCPR9E	
1125	CR	1125	2009->2010			0.8	CR9EKB	
1125	R	1125	2008->			0.8	CR9EKB	
1200	LIGHTNING X1	1200	1999->2005			0.8	DCPR8E	
1200	M2 CYCLONE	1200	1997->1998	2		0.8	DCPR8E	
1200	S1 LIGHTNING B,H1	1200	1996->1997	2		0.8	DCPR8E	
1200	S1 WHITE LIGHTNING	1200	1998->	2		0.7	DCPR7E	
1200	S3T BOLT,BOLT TOUR	1200	1997->	2		0.8	DCPR8E	
1200	XB12R	1200	2007->			0.8	DCPR9E	
1200	XB12S	1200	2004->2007			0.8	DCPR9E	
1200	XB12S TT	1200	2007->			0.8	DCPR9E	
1200	XB12SS,X	1200	2006->2007			0.8	DCPR9E	
1200	XB12XT	1200	2008->			0.8	DCPR9E	
CAGIVA								
125	125R,D	125	1999->	1		0.8	BR9EG	BR9ES
125	MITO SP525	125	2008->			0.8	BR9EG	BR9ES
125	MITO, E.V	125		1		0.8	BR9EG	BR9ES
125	RAPTOR	125	2004->			0.8	BR9EG	BR9ES
125	SUPERCITY 125R,D	125	1999->	1		0.8	BR9EG	BR9ES
650	RAPTOR	650		2		0.8	CR8E	
900	CANYON	900		2		0.9	DPR8EA-9	
1000	NAVIGATOR	1000		2		0.8	CR8EK	CR8E
1000	RAPTOR	1000		2		0.8	CR8EK	CR8E
1000	V-RAPTOR	1000		2		0.8	CR8EK	CR8E
1000	X-TRA RAPTOR	1000	2003->			0.8	CR8EK	CR8E
1000	X-TRA RAPTOR	1000	2004->			0.8	CR8EK	CR8E
CAN-AM								
1000	SPYDER ROADSTER	1000	2008->			0.8	DCPR9E	
DERBI								
125	TERRA	125	2008->			0.8	CR8EB	
DUCATI								
500	500GTL, SPORT DESMO	500		2		0.7	B7HS	BR7HS
500	500SL PANTAH	500		2		0.7	BP7HS	
600	600M,MC,MD	600		2		0.9	DPR9EA-9	
600	600SL PANTAH	600		2		0.7	BP7HS	
600	600SS,MONSTER	600		2		0.9	DPR9EA-9	
620	MULTISTRADA	620	2005->			0.8	DCPR8E	
696	MONSTER	700	2007->			0.8	DCPR8E	
750	F1	750		2		0.7	D8EA	DR8EA
750	PASO	750		2		0.7	D8EA	DR8EA
750	748 BIPE,R	750		2		0.9	DPR8EA-9	
750	GT,S,SPORT,SS,ST	750		2		0.7	B7HS	BR7HS
750	SPECIAL SS	750		2		0.7	BP7HS	
750	SUPER SPORT	750		2		0.6	B10ES	



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
DUCATI						DUCATI		
803	MONSTER S2R	803	2006->			0.8	DCPR8E	
848		850	2007->			0.8	MAR10A-J	
860	GS,GT,GTS	860		2		0.5	B5HS	BR5HS
900	SS,SD,S2	900		2		0.7	B7HS	BR7HS
916	ST4	916		2		0.7	DCPR9EVX	DCPR9E
944	ST2	944		2		0.9	DPR8EA-9	
989	DESMOSEDICI RR	989	2007->			0.8	MAR10A-J	
990	DESMO 16 RR	990	2007->			0.8	MAR10A-J	
992	ST3	992	2004->2005			0.8	CR9E	
996	BIP,SPS,SPSF	996		2		0.7	DCPR9EVX	DCPR9E
998		998	2006->			0.8	MAR10A-J	
999		998	2005->			0.7	DCPR9EVX	DCPR9E
999		999	2003->			0.8	CR9EB	
1000	CLASSIC SPORT	1000	2006->			0.8	DCPR8E	
1000	M,H MILLE	1000		2		0.7	B7HS	BR7HS
1000	MONSTER SZR	1000	2006->			0.8	DCPR8E	
1000	MULTISTRADA S DS	1000	2005->			0.9	DPR8EA-9	
1000	S2R MONSTER	1000	2006->			0.8	DCPR8E	
1000	ST3	1000	2004->2008			0.8	CR9EVX	CR9E
1078	HYPERMOTARD	1078	2007->			0.8	DCPR8E	
1098		1099	2007->			0.8	MAR10A-J	
1100	HYPERMOTARD	1100	2010->			0.8	DCPR8E	
1100	MONSTER	1100	2009->			0.8	DCPR8E	
1100	MULTISTRADA	1100	2007->			0.8	DCPR8E	
1100	STREETFIGHTER /S	1100	2009->			0.8	MAR10A-J	
1198	MULTISTRADA	1198	2010->			0.8	MAR9A-J	
1198	R,S	1198	2008->			0.8	MAR10A-J	
1200	BRUTALE 1098 R	1200	2008->			0.8	CR9EB	
1200	F4 1098 RR	1200	2008->			0.8	CR9EB	
GAS GAS						GAS GAS		
125	ENDURO	125	2002->			0.8	BR8EIX	
250	EC 250 ENDURO CROSS	250	2002->			0.8	BR8EIX	
300	ATV HP 300 WILD	300	2003->			0.8	BR8EIX	
GENERAL						GENERAL		
150	COUGAR	150				0.7	C7HSA	CR7HSA
250	COUGAR	250				0.7	C7HSA	CR7HSA
HARLEY DAVIDSON						HARLEY DAVIDSON		
1130	VRSC-V-ROD	1130	2002->2005			0.8	DCPR8E	
1200	DUO GLIDE, ELECTRA GLIDE, FL	1200		2		0.6	BP5S	
1200	EVOLUTION XL V-2	1200	1986->2005			0.7	DCPR7E	
1200	FLH, FX, FXE	1200	1974->	2		0.6	BP5S	
1200	FLH, FX, FXE	1200	1975->1980	2		1.1	BP5ES-11	BPR5ES-11
1200	SPORTSTER EVOLUTION XL1200R	1200	2004->			0.7	DCPR7E	
1200	SPORTSTER NIGHTSTER	1200	2008->			0.8	DCPR8E	
1200	SPORTSTER XR 1200	1200	2008->			0.8	DCPR8E	
1200	XL1200R SPORTSTER	1200	2004->			0.7	DCPR7E	
1250	V ROD VRSCAW	1250	2008->			0.8	DCPR8E	
1340	SHOVEL HEAD: ALL MODELS	1340	1978->1981	2		1.1	BP5ES-11	BPR5ES-11
1340	SHOVEL HEAD: FL, FLH, FLHS	1340	1982->1983	2		1.0	ZGR5C	
1340	SHOVEL HEAD: FLT, FLHT	1340	1984->	2		1.1	BP5ES-11	BPR5ES-11
1340	SHOVEL HEAD: FLT, FX, FXB	1340	1982->1983	2		1.0	ZGR5C	
1340	SHOVEL HEAD: FX5B	1340	1983->1984	2		1.0	ZGR5C	
1340	SHOVEL HEAD: FXE	1340	1982->1984	2		1.0	ZGR5C	
1340	SHOVEL HEAD: FXEF, FXRS	1340	1982->1983	2		1.0	ZGR5C	
1340	SHOVEL HEAD: FXR, FXS	1340	1982->1983	2		1.0	ZGR5C	
1340	SHOVEL HEAD: FXRS, FXRT, FXST	1340	1984->	2		1.1	BP5ES-11	BPR5ES-11
1340	SHOVEL HEAD: FXWG	1340	1984->	2		1.0	ZGR5C	
1340	V2 EVOLUTION: FLT, FLHT, FXRD	1340	1985->	2		1.1	BP5ES-11	BPR5ES-11
1340	V2 EVOLUTION: FXRS, FXRT, FXSB	1340	1985->	2		1.1	BP5ES-11	BPR5ES-11
1340	V2 EVOLUTION: FXST, FXWG, GXE	1340	1985->	2		1.1	BP5ES-11	BPR5ES-11
1450	DYNA SUPER GLIDE	1450				0.7	DCPR7E	
1450	FL	1450	1998->2005			0.7	DCPR7E	
1584	DYNA FAT BOB	1584	2008->			0.8	DCPR8E	
1584	FLSTSB CROSSBONES	1584	2008->			0.8	DCPR8E	
1584	FX TC 96/B	1584	2007->			0.8	DCPR8E	
1585	SOFT TAIL ROCKER	1585	2008->			0.8	DCPR8E	



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
HONDA							HONDA	
50	BF50	50		1		0.8	BPR5E5	BP5E5
50	CD50	50		1		0.7	C6HSA	CR6HSA
50	CRF50F	50	2007->	1		0.7	CR6HSA	
50	F5A,E DIO SCOOTER FSE	50		1		0.8	B8HS	BR8HS
50	GS7E SCOOTER	50		1		0.7	BR4HS	
50	KA50A SCOOTER	50		1		0.7	BR6HSA	
50	MB50	50		1		0.8	B8HS	BR8HS
50	MBX50,FWDF	50		1		0.8	B9ES	BR9ES
50	MBX50SD	50		1		0.5	B6ES	BR6ES
50	MT50	50		1		0.8	B8HS	BR8HS
50	MT50FL	50		1		0.8	B8ES	BR8ES
50	MTX50R,RFF	50		1		0.8	B8ES	BR8ES
50	NC50	50		1		0.7	BP4HS	BPR4HS
50	NH50,MDD	50		1		0.6	BP6HS	BPR6HS
50	NS50	50		1		0.7	BP5HS	
50	NS50D	50		1		0.7	BP4HS	BPR4HS
50	NS50FL	50		1		0.8	B8ES	BR8ES
50	PZ-50	50		1		0.6	BP6HS	BPR6HS
50	QR50R,M,N	50		1		0.7	BP4HS	BPR4HS
50	QR50V	50		1		0.7	BP5HS	
50	SB-50 (IDK)	50		1		0.7	BP4HS	BPR4HS
50	SE50	50		1		0.6	BP6HS	BPR6HS
50	SK-50	50		1		0.7	D8EA	DR8EA
50	T5Q TACT SCOOTER	50		1		0.6	BP6HS	BPR6HS
50	VISION	50		1		0.8	BP8HS	BPR8HS
50	Z50	50		1		0.7	C6HSA	CR6HSA
50	Z50J,RM,RN	50		1		0.7	C6HSA	CR6HSA
60	CR60R	60		1		0.8	B9ES	BR9ES
70	ATC70,K	70		1		0.7	C7HSA	CR7HSA
70	C70	70		1		0.7	C7HSA	CR7HSA
70	CT70,H	70		1		0.7	C7HSA	CR7HSA
70	R,D	70	1997->	1		0.7	CR6HSA	
80	CR80R	80	1984->	1		0.8	B9ES	BR9ES
80	CR80R	80	1986->	1		0.6	B10E5	
80	CR80R,R II	80	1985->	1		0.8	B9ES	BR9ES
80	MB80,S	80		1		0.8	B8HS	BR8HS
80	MT80	80		1		0.8	B9HS	BR9HS
80	NH80 (LEAD/AERO)	80		1		0.6	BP6HS	BPR6HS
80	XR80RS,T	80		1		0.8	CR7HSA	
85	CR85R	85	2003->2006			0.8	BR10EG	
85	CR85R	85	2007->			0.8	B10EG	BR10EG
85	CR85R2	85	2007->			0.8	BR10EG	
90	C90	90		1		0.6	D6HS	DR6HS
90	CT90,K	90		1		0.7	D8HS	
90	TRX 90 ATV	90	1993->2006			0.8	CR7HSA	
100	CB100	100		1		0.7	D8EA	DR8EA
100	CD100	100		1		0.7	C7HSA	CR7HSA
100	CRF100F	100	2007->			0.8	CR7HSA	
100	CRF100F	100		1		0.8	CR7HSA	
100	H100	100		1		0.7	B7HS	BR7HS
100	H100S	100		1		0.8	B8HS	BR8HS
100	JET 100	100		1		0.7	BR6HSA	
100	MB100	100		1		0.7	B7HS	BR7HS
100	NH100	100		1		0.8	BR7HS	
100	XL100R	100		1		0.7	C7HSA	CR7HSA
100	XR100RT	100		1		0.8	CR7HSA	
110	CT110	110		1		0.7	D8EA	DR8EA
110	CT110P	110		1		0.7	D8HS	
125	125 VARADERO	125	2008->			0.9	CR8EH-9	
125	A125	125		1		0.7	C7HSA	CR7HSA
125	ANF125	125	2007->			0.9	CPR6EA-9	
125	ATC125M	125		1		0.7	D8EA	DR8EA
125	CA125	125		1	JC26	0.7	CR6HSA	
125	CBF125	125	2009->			0.9	CPR7EA-9	
125	CBR 125R	125	2004->2006			0.8	CR9E	
125	CBR 125R	125	2007->			0.8	CR8E	
125	CG125,S5,SP	125		1		0.7	D8EA	DR8EA
125	CG125F3	125		1		0.7	D8EA	DR8EA
125	CG125P	125		1		0.9	DP8EA-9	DPR8EA-9
125	CH125	125		1		0.9	DP7EA-9	DPR7EA-9
125	CR125M	125		1		0.8	B9ES	BR9ES



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
HONDA								
125	CR125R	125	2007->			0.8	CR8E	HONDA
125	CR125R	125		1		0.8	B9ES	BR9ES
125	L125S DIFA SCOOTER	125		1		0.6	BP6HS	BPR6HS
125	LS125	125		1		0.8	B8ES	BR8ES
125	NES125,Y,ES	125	2000->	1		0.9	CR8EH-9	
125	NH125 (LEAD,AERO)	125		1		0.6	BP6HS	BPR6HS
125	NSR125	125		1		0.7	BR9ECS	
125	NX125	125		1		0.7	DR8EA	
125	RS125R	125				0.8	R6385-105P	
125	SH125	125	2001->	1		0.9	CR8EH-9	
125	TL125,K,S	125		1		0.7	D8EA	DR8EA
125	TRX125	125		1		0.7	D8EA	DR8EA
125	VARADERO	125				0.9	CR8EH-9	
125	VT125	125	2000->	1		0.9	CR8EH-9	
125	XL125	125		1		0.7	D8EA	DR8EA
125	XL125S,SD,DUTY	125		1		0.7	D8EA	DR8EA
125	XL125V	125	2007->			0.9	CR8EH-9	
125	XL125VF	125	2001->	1		0.9	CR8EH-9	
125	XLR 125	125		1		0.9	DPR8EA-9	
125	XR125L	125		1		0.9	DPR9EA-9	
135	HX135	135		1		0.7	D8EA	DR8EA
150	CRF150F	150	2003->2006			0.9	CPR8EA-9	
150	CRF150RB	150	2008->	1		0.8	R0409B-9	
150	NSR150R	150		1		0.8	B8ES	BR8ES
150	NSR150SP	150		1		0.7	B9ECS	BR9ECS
175	CB175,K	175		2		0.7	D8HS	
175	CL175,K	175		2		0.7	D8HS	
175	XL175	175		1		0.8	B7ES	BR7ES
185	ATC185,A,S	185		1		0.7	D8EA	DR8EA
185	XL185S,SD	185		1		0.7	D8EA	DR8EA
200	ATC BIG RED	200		1		0.7	D8EA	DR8EA
200	ATC200,E,ES,M,S,X	200		1		0.7	D8EA	DR8EA
200	CB200,B,T	200		2		0.7	D8EA	DR8EA
200	CB250,NIGHTHAWK	200	1991->2007	1		0.7	CR6HSA	
200	CD200T	200	1985->	2		0.7	C7HSA	CR7HSA
200	CD200T ROAD MASTER	200		2		0.7	C7HSA	CR7HSA
200	CL200	200		2		0.7	D8EA	DR8EA
200	CT200	200		1		0.7	DR8ES-L	
200	CT200K	200		2		0.7	D8EA	DR8EA
200	TLM200R	200				0.8	B8ES	BR8ES
200	TRX-200,XN SPORT,DN AGRI	200		1		0.7	D8EA	DR8EA
200	TRX200DV	200		1		0.7	DR8ES-L	
200	XL200 SUPER	200		1		0.7	D8EA	DR8EA
200	XL200R	200		1		0.7	D8EA	DR8EA
200	XLR 200	200		1		0.9	DPR8EA-9	
200	XR200/R	200	1983->	1		0.7	D8EA	DR8EA
200	XR200R	200		1		0.9	DP8EA-9	DPR8EA-9
200	XR200RM/RP	200		1		0.7	D8EA	DR8EA
230	CRF230F	230	2003->2006			0.9	DPR7EA-9	
230	SL	230	1998->			0.9	DPR8EA-9	
250	ATC250ES,SX	250		1		0.7	D8EA	DR8EA
250	ATC250R	250		1		0.8	B8ES	BR8ES
250	ATC250R ATV	250				0.8	BR9ES	
250	ATC250SX	250		1		0.7	D8EA	DR8EA
250	CB250 NIGHTHAWK	250	1991->2006			0.7	CR6HSA	
250	CB250,G	250		2		0.8	B8ES	BR8ES
250	CB250RS	250		2		0.7	D8EA	DR8EA
250	CBF250	250	2005->			0.9	CR8EH-9	
250	CBF250	250	2006->			0.9	CR8EH-9	
250	CFR250X	250	2007->			0.8	R0409B-8	
250	CMX250C,REBEL	250	1996->2006			0.7	CR6HSA	
250	COTA 4RT	250	2009->			0.9	CR6EH-9	
250	CR250	250		1		0.8	B9ES	BR9ES
250	CR250M	250		1		0.8	B9ES	BR9ES
250	CR250R	250	2005->2006			0.9	BR9EG-N-9	
250	CR250R	250				0.8	BR8ES	
250	CRF250	250	2005->	1		0.9	CR8EH-9	
250	CRF250	250	2009->			0.8	R0451B-8	
250	CRF250F	250	2009->			0.8	R0451B-8	
250	CRF250R	250	2005->			0.8	R0409B-8	
250	CRF250R	250	2005->2006			0.8	R0409B-8	



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
HONDA							HONDA	
250	CRF250R	250				0.9	IMR9C-9H	
250	CRF250X	250	2004->2006			0.9	IMR8C-9H	
250	CRF250X	250	2007->			0.8	R0409B-8	
250	MR250	250		1		0.8	B8ES	BR8ES
250	NSR-250 RG	250		2		0.7	B9ECS	BR9ECS
250	PS250 BIG RUCKUS	250	2005->2006			0.9	DPR7EA-9	
250	RS250R	250				0.8	R6120-105	
250	RTL250F	250				0.9	CR6EH-9	
250	SL250S	250		2		0.7	D8EA	DR8EA
250	TL250	250		1		0.7	D7EA	DR7EA
250	TLR250R	250				0.7	D8EA	DR8EA
250	TRX250	250		1		0.7	D8EA	DR8EA
250	TRX250EX ATV	250	2001->2006			0.9	DPR8EA-9	
250	TRX250R ATV	250				0.8	BR9ES	
250	TRX250TM ATV	250	1996->2006			0.9	DPR8EA-9	
250	TRX250X ATV	250				0.7	DR8ES-L	
250	XL250	250		1		0.7	D8EA	DR8EA
250	XL250R	250	1984->	1		0.7	D8EA	DR8EA
250	XR250R	250	1983->	1		0.7	D8EA	DR8EA
260	TLM260R	260				0.5	B6ES	BR6ES
280	SH280	280	2007->			0.9	LMAR8A-9	
300	TRX300 FWP4X4	300		1		0.9	DPR8EA-9	
300	TRX300EX ATV	300	1993->2005			0.7	DR8ES-L	
300	TRX300EX ATV	300	2006->			0.7	DR7EA	
300	TRX300FWT	300		1		0.9	DPR8EA-9	
350	CB350,G	350		2		0.8	B8ES	BR8ES
350	CB350F	350		4		0.7	D8EA	DR8EA
350	NX350	350		2		0.9	DP8EA-9	DPR8EA-9
350	SL350,K	350		2		0.8	B8ES	BR8ES
350	TRX350TE ATV	350	2000->2006			0.9	DPR7EA-9	
350	XL350,K	350		1		0.7	D8EA	DR8EA
350	XLX350	350		1		0.9	DP8EA-9	DPR8EA-9
350	XR350,R	350		1		0.9	DP8EA-9	DPR8EA-9
350	YRX350FM	350	2000->2006			0.9	DPR7EA-9	
360	CB360,G,T	360		2		0.8	B8ES	BR8ES
400	400FGA ATV	400	2004->2006			0.9	DPR7EA-9	
400	CB400 SUPER 4	400				0.9	CR8EH-9	
400	CB400A,F	400		4		0.7	D8EA	DR8EA
400	CB400N	400		2		0.7	D8EA	DR8EA
400	CB400SS	400				0.8	DPR8EA	
400	CB400T	400		2		0.7	D8EA	DR8EA
400	CBR 400RR	400		4		0.9	CR8EH-9	
400	CBR400RR	400				0.9	CR8EH-9	
400	CM400A/E	400		2		0.7	D8EA	DR8EA
400	CM400T	400		2		0.7	D8EA	DR8EA
400	CX400,C	400		2		0.7	D8EA	DR8EA
400	NS400,R	400		3		0.8	B9ES	BR9ES
400	TRX400EX ATV	400	2001->2006			0.8	DPR8Z	
400	TRX400FE ATV	400	2004->2006			0.9	DPR7EA-9	
400	TRX400FGA ATV	400				0.9	DPR8EA-9	
400	TRX400FWT	400		1		0.9	DPR7EA-9	
400	VF400F	400		4		0.9	DP8EA-9	DPR8EA-9
400	VFR400R	400		4		0.7	ER9EH	
400	XR400R	400		1		0.8	DPR8Z	
450	CB-450 TR-DX	450		2		0.9	DP8EA-9	DPR8EA-9
450	CB450T HAWK	450		2		0.7	D8EA	DR8EA
450	CR450	450	2002->	1		1.1	BCPR8EVX-11	
450	CRF450R	450	2002->	1		1.1	IFR8H-11	
450	CRF450R	450	2003->	1		1.1	IFR9H-11	
450	CRF450R	450	2007->2008			1.1	IFR8H-11	
450	CRF450R	450	2008->			0.9	SILMAR9A9S	
450	CRF450X	450	2005->2006			1.1	IFR8H-11	
450	CRF450X	450	2007->			1.1	IFR8H-11	
450	TRX450	450	1998->			0.9	DPR7EA-9	
450	TRX450	450	1998->			0.9	DPR7EA-9	
450	TRX450ER ATV	450	2006->			1.1	IFR8H-11	
450	TRX450R ATV	450	2004->2006			1.1	IFR8H-11	
450	TRX450R,ER ATV	450	2004->2006			1.1	IFR8H-11	
450	TRX450V ATV	450				0.9	DPR7EA-9	
480	CR480R	480		1		0.8	B8ES	BR8ES
500	4 WHEELER ATV	500		1		0.9	IJR7A-9	



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
HONDA								
500	CB500	500		4		0.7	D7EA	DR7EA
500	CB500T	500		4		0.8	B8ES	BR8ES
500	CB500V	500		4		0.9	CR8EH-9	
500	CBF 500	500	2004->			0.9	CR8EH-9	
500	CR500	500		1		0.8	B8ES	BR8ES
500	CR500R	500		1		0.8	B8ES	BR8ES
500	CX500,C,D,SPORT	500		2		0.7	D8EA	DR8EA
500	CX500T	500		2		0.9	DP8EA-9	DPR8EA-9
500	FT500,ASCOT	500		1		0.7	D8EA	DR8EA
500	GL500	500		2		0.7	D8EA	DR8EA
500	TRX500 ATV	500				0.9	IJR7A-9	
500	TRX500FA	500	2001->	1		0.9	IJR7A-9	
500	TRX500FA ATV	500	2001->2006			0.9	IJR7A-9	
500	TRX500FE ATV	500	2005->2006			1.1	BKR5ES-11	
500	TRX500FE ATV	500	2005->2006			1.1	BKR5ES-11	
500	TRX500FE,FM,TM	500				1.1	BKR5ES-11	
500	TRX500FGA ATV	500	2004->2006			0.9	IJR7A-9	
500	VF500C,F,FII	500		4		0.9	DP8EA-9	DPR8EA-9
500	VT500C,E,FT	500		1		0.9	DP8EA-9	DPR8EA-9
500	XL500R,S	500		1		0.7	D8EA	DR8EA
500	XR500	500		1		0.7	D8EA	DR8EA
500	XR500R	500		1		0.9	DP8EA-9	DPR8EA-9
550	CBX550F,FII,T	550		4		0.7	D8EA	DR8EA
600	CB600 HORNET	600	2009->			0.9	CR9EH-9	
600	CB600F HORNET	600	2001->	4		0.9	CR9EH-9	
600	CB600F/FA HORNET	600	2007->			0.9	CR9EH-9	
600	CBF 600 S	600	2008->			0.9	CR8EH-9	
600	CBF600S	600	2008->			0.9	CR8EH-9	
600	CBR600	600		4		0.9	C9EH-9	CR9EH-9
600	CBR600 FK,FL,FN	600		4		0.9	DPR9EA-9	
600	CBR600F,FS	600	2001->	4		0.9	CR9EHVX-9	CR9EH-9
600	CBR600F4I	600		4		0.9	IMR9A-9H	
600	CBR600FX	600		4		0.9	CR8EH-9	
600	CBR600RR	600	2005->			0.9	IMR9C-9HES	
600	CBR600RR	600	2007->			0.9	IMR9C-9H	
600	CBR600RR	600	2008->			0.9	IMR9C-9H	
600	CBR600RR	600	2009->			0.9	IMR9E-9HES	
600	CBR600RR HANNSPREE	600	2008->			0.9	IMR9C-9H	
600	FES600 SILVER WING	600	2001->	4		0.9	CR8EH-9	
600	VT600	600		2		0.9	DPR8EA-9	
600	VT600CD SHADOW VLX	600	2006->			0.9	DPR8EA-9	
600	VT600CV	600		2		0.9	DPR8EA-9	
600	XL600L	600		1		0.9	DP8EA-9	DPR8EA-9
600	XL600R	600		1		0.9	DP8EA-9	DPR8EA-9
600	XL600VT	600		1		0.9	DPR8EA-9	
600	XR600R,RM,RP	600		1		0.9	DP9EA-9	DPR9EA-9
650	CB650C	650		2		0.9	DP8EA-9	DPR8EA-9
650	CB650S,SC,SCF	650		2		0.9	DP8EA-9	DPR8EA-9
650	CX650 C,E,CUSTOM	650		2		0.9	DP8EA-9	DPR8EA-9
650	FMX 650	650	2005->			0.9	DPR8EA-9	
650	TRANSALP 650V	650	2004->			0.9	DPR8EA-9	
650	TRX650FA ATV	650				1.1	IFR5L-11	
650	TRX650FGA ATV	650				1.1	IFR5L-11	
650	XL650RY	650	2000->	2		1.1	BKR8E-11	
650	XR650L	650	1993->2006			0.9	DPR8EA-9	
650	XR650R	650	2000->	1		1.1	BKR7E-11	
650	XR650R	650	2000->2006			0.8	BKR7E	
650	XRV650	650		2		0.9	DPR8EA-9	
650	XRV650S	650		2		0.9	DPR9EA-9	
680	TRANSALP680 VT	680	2008->			0.9	CPR8EA-9	
680	TRX680FA	680	2006->			1.1	IFR5L-11	
700	TRANSALP	700	2008->			0.9	CPR8EA-9	
700	XL700V	700	2008->			0.9	CPR8EA-9	
750	SHADOW	750	2008->			0.9	DPR7EA-9	
750	750RS SHADOW	750	2010->			0.9	DPR7EA-9	
750	BLACK SPIRIT	750	2010->			0.9	DPR7EA-9	
750	CB750,A,FZ,KZ	750		4		0.7	D8EA	DR8EA
750	CB750C,F,F2,K	750		4		0.7	D8EA	DR8EA
750	CBX750F,2	750		4		0.9	DP8EA-9	DPR8EA-9
750	RVF 750 R,R45	750	1994->1997	4		0.9	CR9EHIX-9	
750	SHADOW	750	2004->			0.9	DPR8EA-9	



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
HONDA								
750	VF750,C,F,S	750		4		0.9	DP8EA-9	DPR8EA-9
750	VFR-750 RJ	750		4		0.9	C9EH-9	CR9EH-9
750	VFR750, FN	750		4		0.9	DP9EA-9	DPR9EA-9
750	VT750C SHADOW AERO	750	2004->2006			0.9	DPR7EA-9	
750	VT750C2 SHADOW	750	2000->	4		0.9	DPR8EA-9	
750	VT750DC BLACK WIDOW	750	2001->	4		0.9	DPR8EA-9	
750	VT750DC SHADOW SPIRIT	750	2006->			0.9	DPR7EA-9	
750	XRV750	750		2		0.9	DPR8EA-9	
750	XRV750ED	750		2		0.9	DPR8EA-9	
800	VFR800	800	1998->	4		0.9	CR9EH-9	
800	VFR800	800		4		0.8	CR8EIX	CR8E
800	VFR800,A INTERCEPTOR	800	2002->2005			0.9	IMR9B-9H	
800	VFR800F1 02	800	2002->	4		0.9	IMR9B-9H	
900	CB900F,F2	900		4		0.7	D9EA	DR9EA
900	CBR 900	900	2003->	4		0.9	IMR9C-9H	
900	CBR900RR	900		4		0.9	CR9EH-9	
900	CBR900RR FIREBLADE	900	2002->	4		0.9	CR9EHVX-9	CR9EH-9
900	CBR900RRY	900	2000->	4		0.9	CR9EHVX-9	CR9EH-9
900	HORNET	900	2002->			0.9	CR8EH-9	
929	CBR929RR	929	2000->2001			0.9	CR9EH-9	
950	CBR 954RR	954		4		0.9	IMR9C-9H	
1000	1000 VARADERO	1000	2008->			0.9	IJR8B-9	
1000	CB 1000 R	1000	2008->			0.9	IMR9C-9HES	
1000	CB1000R	1000	2008->			0.9	IMR9C-9HES	
1000	CB1000R	1000	2008->			0.9	IMR9C-9HES	
1000	CB1000SF	1000				0.9	DPR8EA-9	
1000	CBF 1000	1000	2006->			0.9	CR8EH-9	
1000	CBF1000	1000	2009->			0.9	CR8EH-9	
1000	CBR 1000 FIREBLADE	1000	2008->			0.9	IMR9E-9HES	
1000	CBR 1000 RR FIREBLADE	1000	2008->			0.9	IMR9E-9HES	
1000	CBR1000	1000		4		0.9	DP9EA-9	DPR9EA-9
1000	CBR1000 FIRE BLADE	1000	2007->			0.9	IMR9C-9HES	
1000	CBR1000FK,FL	1000		4		0.9	DPR9EA-9	
1000	CBR1000RR	1000	2005->			0.9	IMR9C-9H	
1000	CBR1000RR	1000	2010->			0.9	IMR9E-9HES	
1000	CBR1000RR FIREBLADE	1000	2009->			0.9	IMR9E-9HES	
1000	CBR1000RR FIREBLADE	1000	2009->			0.9	IMR9E-9HES	
1000	CBR1000RR FIREBLADE	1000	2010->			0.9	IMR9E-9HES	
1000	CBX1000	1000		6		0.7	D8EA	DR8EA
1000	GL1000,LTD	1000		4		0.7	D8EA	DR8EA
1000	SP2 1000	1000	2003->	4		1.1	IFR9H-11	
1000	VARADERO	1000	2006->			0.9	IJR8B-9	
1000	VARADERO	1000	2008->			0.9	IJR8B-9	
1000	VARADERO 1000	1000	2008->			0.9	IJR8B-9	
1000	VF1000F	1000	1986->	4		0.9	DP9EA-9	DPR9EA-9
1000	VF1000F	1000	1987->	4		0.9	DP8EA-9	DPR8EA-9
1000	VTR1000 SP1,SP2	1000	2003->	4		1.1	FR8BI-11	
1000	VTR1000 SP2	1000		4		1.1	IFR8H-11	
1000	VTR1000F FIRESTORM	1000	1997->	2		0.9	DPR9EVX-9	DPR9EA-9
1000	VTR1000SP1	1000	2000->	4		1.1	FR9BI-11	
1000	XL1000	1000		2		0.9	DP8EVX-9	DPR8EA-9
1000	XL1000 VARADERO	1000	2003->			0.9	IJR8B-9	
1000	XL1000V VARADERO	1000	1999->2001			0.9	DPR8EA-9	
1000	XLV1000 VARADERO	1000	1999->	2		0.9	DP8EVX-9	DPR8EA-9
1100	CB1100F,R	1100		4		0.7	D8EA	DR8EA
1100	CB1100SF X-11	1100	1999->	4		0.9	CR8EH-9	
1100	CBR1100 XX	1100		4		0.9	CR9EHVX-9	CR9EH-9
1100	CBR1100XV	1100		4		0.9	CR9EHVX-9	CR9EH-9
1100	CBR1100XX BLACKBIRD	1100	1997->	4		0.9	CR9EHVX-9	CR9EH-9
1100	CBR1100XX SUPER BLACKBIRD	1100	2001->	4		0.9	CR9EHVX-9	CR9EH-9
1100	GL1100 ASPENCADE,GOLD WING	1100		4		0.9	DP8EA-9	DPR8EA-9
1100	GL1100 INTERSTATE	1100		4		0.9	DP8EA-9	DPR8EA-9
1100	GL1100,DX	1100	1981->	4		0.7	D8EA	DR8EA
1100	GL1100,DX	1100	1982->	4		0.9	DP8EA-9	DPR8EA-9
1100	ST1100M	1100		4		0.9	CR8EH-9	
1100	VT1100C,C2	1100		2		0.9	DPR7EA-9	
1100	VT1100CV	1100		2		0.9	DPR7EA-9	
1200	GL1200 ASPENCADE,GOLD WING	1200		4		0.9	DP8EA-9	DPR8EA-9
1200	GL1200 INTERSTATE,LIMITED EDITION	1200		4		0.9	DP8EA-9	DPR8EA-9
1300	CB1300SF	1300				0.9	DPR8EA-9	
1300	ST1300	1300				0.9	CR8EH-9	



MOTOR CYCLES



Model

Type

Capacity

Year

Cylinder

Engine

Gap

Recommended
Manufacturers
Specification

Alternative
15 000km
Service Interval

HONDA

HONDA

1500	GL1500CV	1500		6		0.9	DPR7EA-9
1500	GL1500L	1500		6		0.9	DPR7EA-9
1800	VTX 1800	1800	2001->			1.1	IFR6L-11
1800	VTX1800	1800	2001->			1.1	IFR6L-11
1800	VTX1800	1800	2003->	6		1.1	BKR6E-11
1880	GL1880	1880	2001->	6		0.8	BKR6E

HUSQVARNA

HUSQVARNA

50	HUSKY BOY BASIC	50	2001->			0.8	B8HS	BR8HS
50	HUSKY BOY JNR	50	2001->			0.6	B6HS	BR6HS
50	HUSKY BOY SNR	50	2001->			0.6	B6HS	BR6HS
50	WRS	50	1999->	1		0.8	B9ES	BR9ES
125	125 MOTOCROSS CR	125		1		0.8	B9ES	BR9ES
125	125 WMX	125		1		0.8	B9ES	BR9ES
125	125 WR	125	1998->2004			0.8	BR9EG	BR9ES
125	SM125S	125	2000->	1		0.8	BR9EG	BR9ES
125	WR125	125		1		0.8	B9ES	BR9ES
125	WRE125	125	1998->2001			0.8	B9EG	BR9EG
250	250 MOTOCROSS RT,CR	250		1		0.8	B8ES	BR8ES
250	250 SPORTSMAN ENDURO	250		1		0.8	B9ES	BR9ES
250	250 TC	250	2002->2005			0.8	CR8EB	
250	250 TE	250	2002->2005			0.8	CR8EB	
250	250 WR	250	2002->2005			0.8	BR8EG	
300	WR300	300				0.8	BR8EJX	
310	TE310	310	2009->			0.8	CR8EB	
360	360 MOTOCROSS RT	360		1		0.8	B8ES	BR8ES
360	360 SPORTSMAN ENDURO	360		1		0.8	B8ES	BR8ES
400	400 MOTOCROSS	400		1		0.8	B8ES	BR8ES
400	TE400	400	2001->	1		0.7	C7E	CR7E
450	450 MOTOCROSS	450		1		0.8	B8ES	BR8ES
450	450 SMR	450	2004->			0.8	CR8EB	
450	450 TC	450	2002->2005			0.8	CR8EB	
450	450 TE	450	2002->2005			0.8	CR8EB	
460	460MX CR	460		1		0.8	B8ES	BR8ES
500	500TC	500		1		0.7	D8EA	DR8EA
510	501TX, 510TE	510		1		0.7	D8EA	DR8EA
510	510 TC	510	2004->2005			0.8	CR8EB	
510	510 TE	510	2004->2005			0.8	CR8EB	
510	CROSS COUNTRY	510		1		0.7	C7E	CR7E
510	MOTOCROSS	510		1		0.7	C7E	CR7E
570	NOX570	570	2001->	1		0.7	C7E	CR7E
570	SM570R	570	2004->			0.8	C8E	CR8E
570	TC,TE570	570	2001->	1		0.7	C7E	CR7E
610	SM610	610	2003->			0.7	C7E	CR7E
610	SM610	610	2006->			0.8	CPR8E	
610	SM610S	610	2003->			0.8	C8E	CR8E
630	SMR630	630	2004->			1.0	R0045J-10	

HYOSUNG

HYOSUNG

125	GA	125	2000->	1		0.9	CR8EH-9
125	GPS	125	2001->	1		0.7	DR8EA
125	GT125	125	2006->			0.9	CR8EH-9
125	GT125R TTC	125	2007->			0.8	CR8E
125	GV125 M CRUISER	125	2007->			0.8	CR8E
125	RX125	125	2000->	1		0.9	CR8EH-9
250	GT250	250	2005->			0.8	CR8E
650	GT650I R	650	2007->			0.8	CR8E
650	GT650R	650	2006->			0.8	CR8E
650	GT650S	650	2006->			0.8	CR8E
650	GV650	650	2006->			0.8	CR8E
650	GV650I SPORT CRUISER	650	2007->			0.8	CR8E

ITAL JET

ITAL JET

50	MINI BAMBINO JUNIOR CROSS	50		1		0.6	B6HS	BR6HS
50	SCIMITAR KIT KAT	50		1		0.6	B6HS	BR6HS
50	TEENAGER JUNIOR CROSS 4M	50		1		0.6	B6HS	BR6HS
125	BUCCANEER	125		1		0.7	B7HS	BR7HS
125	KANGAROO COYOTE	125		1		0.8	B8HS	BR8HS
180	DRAGSTER	180	2000->	1		0.8	BR9ES	
250	MILLENIUM	250	2000->	1		0.7	DR8EA	



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
JAWA								JAWA
50	STAR 50S,C	50		1		0.6	B6HS	BR6HS
125	BETKA	125	2006->			0.7	C7HSA	CR7HSA
125	DANDY	125	2000->	1		0.7	DR8EA	
350	CHOPPER 350C,H	350		2		0.7	B7HS	BR7HS
350	DELIVERY 350C,M	350		2		0.7	B7HS	BR7HS
350	ECONOMY 1 350R,D	350		2		0.8	B8HS	BR8HS
350	SPORT 350R,D	350		2		0.7	B7HS	BR7HS
350	STYLE 350R,D	350		2		0.8	B8HS	BR8HS
350	TRAMP 350O,F	350		2		0.7	B7HS	BR7HS
350	TRICYCLE 350 3,W	350		2		0.7	B7HS	BR7HS
500	SPECIAL	500				0.8	D8EVX	D8EA
500	R	500				0.8	D8EVX	D8EA
500	SPEEDWAY 500DT	500				0.8	B9EVX	
650	DAKAR	650	2006->			0.7	DR8EA	
JIALING								JIALING
50	CJ 50F, K	50				0.7	BPR6HS	
50	LX	50				0.7	BPR6HSA	
50	QM	50				0.7	BPR4HS	
55	TA	50				0.7	BPR6HSA	
90	K	90				0.7	BP7HS	
100	K	100				0.7	BP7HS	
100	QM	100				0.7	BP7HS	
125	SANYANG DUKE	125				0.9	DPR7EA-9	
125	SANYANG WOLF	125				0.7	DR8ES-L	
KAWASAKI								KAWASAKI
50	AE50	50		1		0.8	B8ES	BR8ES
50	AR50	50		1		0.8	B8ES	BR8ES
50	KFX50 ATV	50	2004->2006			0.7	BPR4HS	
50	KFX50A ATV	50	2003->			0.7	BPR4HS	
50	STAR 50	50		1		0.7	BR6HS	
60	KX60	60		1		0.8	B9ES	BR9ES
65	KX65	65	2000->	1		0.8	BR10EG	
80	AR80	80		1		0.8	BPR7ES	
80	KDX80	80		1		0.8	B8ES	BR8ES
80	KFX80 ATV	80	2003->2006			0.8	BPR7HS	
80	KX80	80		1		0.8	B9EG	BR9EG
85	KX85	85	2001->	1		0.8	R6252K-105	
90	KH90	90		1		0.8	B8ES	BR8ES
90	STAR 90	90		1		0.7	BR6HS	
100	KC 100	100		1		0.8	B8ES	BR8ES
100	KE 100	100		1		0.8	B8ES	BR8ES
100	KH100	100		1		0.8	B8ES	BR8ES
100	KV 100	100	1982->	1		0.8	B8ES	BR8ES
100	KV 100	100	1981->	1		0.7	B7HS	BR7HS
100	KX 100	100		1		0.8	B9ES	BR9ES
110	KH110	110		1		0.8	B8ES	BR8ES
110	KLT110	110		1		0.7	C6HSA	CR6HSA
125	AR125	125	2001->	1		0.8	BR8ES	
125	KE125	125		1		0.8	B9ES	BR9ES
125	KE125 A3-A6	125				0.8	B8HVX	B8HS
125	KH125	125		1		0.8	B8ES	BR8ES
125	KMX125	125		1		0.8	B8ES	BR8ES
125	KX125	125	2003->	1		0.8	B9EG	BR9EG
125	KX125	125	2003->			0.8	BR9ES	
125	KX125	125	2004->			0.8	R6918B-9	
125	KX125	125	2004->			0.8	R6918B-9	
125	KX125	125	2006->			0.8	BR9ECMVX	
125	KX125	125	2006->2008			0.8	R6918B-9	
160	KLT160	160		1		0.7	C6HSA	CR6HSA
175	KE175	175		1		0.8	B7ES	BR7ES
175	KV175	175		1		0.8	B7ES	BR7ES
185	KLF185	185		1		0.7	D8EA	DR8EA
185	KLF185 BAYOU	185		1		0.7	D8EA	DR8EA
200	KDX200 (EI)	200		1		0.8	B9ES	BR9ES
200	KLT200	200		1		0.8	B7ES	BR7ES
200	KMX200	200		1		0.8	B8ES	BR8ES
200	Z200	200		1		0.8	B7ES	BR7ES
250	KDX250	250		1		0.8	B9ES	BR9ES
250	KH250,B	250		1		0.8	B9HS	BR9HS



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
KAWASAKI								KAWASAKI
250	KL250	250		1		0.8	B8ES	BR8ES
250	KLF250 ATV	250	2003->2006			0.7	DR8EA	
250	KLF250A ATV	250	2002->			0.7	DR8EA	
250	KLR250	250		1		0.8	B9ES	BR9ES
250	KLX250	250		1		0.8	B7ES	BR7ES
250	KR250	250		1		0.8	B9ES	BR9ES
250	KV250	250		1		0.8	B8ES	BR8ES
250	KX 250	250	2005->			0.8	BR8ECMVX	
250	KX 250	250		1		0.8	B9ES	BR9ES
250	KX250F	250	2004->	1		0.8	CR8EB	
250	KX250F	250	2004->			0.8	CR8EB	
250	KX250R	250	2005->			0.8	BR8ECM	
250	KX250R	250	2007->			0.8	BR8ECMVX	
250	KXT250	250		1		0.8	B8ES	BR8ES
250	KZ250C	250	1983->	1		0.8	B8ES	BR8ES
250	Z250	250				0.8	B7EVX	BR7ES
250	Z250	250		1		0.8	B8ES	BR8ES
300	KAF300 MULE 550,520	300	2000->	1		0.8	BPR5ES	
300	KEF300A	300	2000->	1		0.7	DR8EA	
300	KLF300	300		1		0.8	B8ES	BR8ES
300	KLF300 BAYOU,PRAIRIE 4X4	300	2000->	1		0.7	DR8EA	
300	KVF300	300		1		0.7	DR8EA	
305	EX305	305		2		0.9	DP9EA-9	DPR9EA-9
360	KVF360 ATV	360	2003->2006			0.9	DPR8EA-9	
400	GPZ400	400	1985->	2		0.9	DP9EA-9	DPR9EA-9
400	KFX400 ATV	400	2003->2006			0.8	CR7E	
400	KFX400A ATV	400	2003->			0.8	CR8E	
400	KH400/A	400		2		0.8	B8HS	BR8HS
400	KLF400	400		1		0.9	DPR8EA-9	
400	KSF400 F ATV	400	2003->2006			0.8	CR7E	
400	KVF400 4X4	400	2000->	1		0.9	DPR8EA-9	
400	KX400,A	400		1		0.8	B9ES	BR9ES
400	KXF400A	400	2003->			0.8	CR8E	
400	KZ400,B,C,D,G,H	400		2		0.8	B7ES	BR7ES
400	KZ400,E,J,K	400	1982->	2		0.7	D8EA	DR8EA
400	KZ400,E,J,K	400	1983->	2		0.7	D7EA	DR7EA
400	Z400F	400	1983->	4		0.7	D9EA	DR9EA
400	Z400F	400	1984->	4		0.9	DP9EA-9	DPR9EA-9
400	Z400F-II	400	1984->	4		0.9	DP9EA-9	DPR9EA-9
400	Z400GP	400		4		0.7	D7EA	DR7EA
400	Z400R	400		4		0.8	B7ES	BR7ES
400	ZX400	400		2		0.7	D9EA	DR9EA
400	ZX400C	400		2		0.7	DR9EA	
400	ZXR400L	400		2		0.8	CR9EK	CR9E
400	ZZR400	400	2002->			0.8	CR9EK	CR9E
420	DX420	420		1		0.8	B8ES	BR8ES
420	KX420A	420		1		0.8	B9ES	BR9ES
440	Z440LTD	440		4		0.8	B7ES	BR7ES
450	DX450	450		1		0.8	B8ES	BR8ES
450	KLX 450R	450	2008->			0.9	CPR8EB-9	
450	KLX450R	450	2008->			0.9	CPR8EB-9	
450	KLX450R	450	2010->			0.9	CPR8EB-9	
450	KX450	450		1		0.8	B9ES	BR9ES
450	KX450F	450	2006->			0.9	CPR8EB-9	
450	KX450F	450	2006->			0.9	CPR8EB-9	
450	LTD450 LIQUID COOLED	450		4		0.7	D8EA	DR8EA
500	EN500	500		1		0.7	DR9EA	
500	EX500	500		1		0.7	D9EA	DR9EA
500	EX500D NINJA	500	1997->2006			0.7	DR9EA	
500	GPZ500R	500		4		0.7	D8EA	DR8EA
500	KDX-500	500		1		0.8	B9ES	BR9ES
500	KH500	500		1		1.0	B9HS-10	BR9HS-10
500	KLE500	500	1990->2005			0.7	DR9EA	
500	KLE500	500		2		0.7	DR8EA	
500	KX500	500		1		0.8	B8ES	BR8ES
500	Z500F	500		4		0.7	D8EA	DR8EA
550	GPZ550	550		4		0.9	DP9EA-9	DPR9EA-9
550	GT550	550		4		0.7	DR8EA	
550	KZ550	550		4		0.7	D8EA	DR8EA
550	Z550F	550		4		0.7	D8EA	DR8EA
550	Z550GT	550		4		0.7	D8EA	DR8EA



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
KAWASAKI							KAWASAKI	
550	Z550LTD	550		4		0.7	D8EA	DR8EA
550	ZR550C	550		4		0.7	DR9EA	
600	GPZ600R	600		4		0.7	D9EA	DR9EA
600	KLR600	600		2		0.7	D8EA	DR8EA
600	KLR600B	600		2		0.9	DP8EA-9	DPR8EA-9
600	NINJA 600R	600		4		0.7	D9EA	DR9EA
600	ZX600RR NINJA	600	2003->2006			0.8	CR9E	
600	ZX6R NINJA	600	2003->			0.8	CR9E	
600	ZX-6R NINJA	600	2000->	4		0.8	CR9E	
600	ZX6RR	600	2004->			0.8	CR9E	
600	ZZR600	600		4		0.8	CR9E	
600	ZZR600 NINJA	600	2002->2006			0.8	CR9E	
650	ER-6F,N	650	2006->2008			0.9	CR9EIA-9	
650	ER6F	650	2006->			0.9	CR9EIA-9	
650	ER6N	650	2006->			0.9	CR9EIA-9	
650	EX650-A NINJA	650	2006->			0.9	DPR8EA-9	
650	KLR650	650		2		0.9	DP8EA-9	DPR8EA-9
650	KLR650-A	650	1997->2006			0.9	DPR8EA-9	
650	KVF650 ATV	650	2005->2006			0.8	CR7E	
650	KVF650 V TWIN	650	2001->	1		0.8	CR7E	
650	VERSYS	650	2006->			0.9	CR9EIA-9	
650	VERSYS	650	2006->			0.9	CR9EIA-9	
650	VERSYS	650	2010->			0.9	CR9EIA-9	
650	Z650	650		4		0.8	B7ES	BR7ES
650	Z650	650				0.8	B7EVX	BR7ES
650	Z650	650		4		0.8	BR7ES	
650	Z650 F-B	650		4		0.8	B8ES	BR8ES
700	KFX700 ATV	700	2004->2006			0.8	CR7E	
700	KSV700A ATV	700	2004->2006			0.8	CR7E	
700	KSV700B ATV	700	2004->2006			0.8	CR7E	
700	KSV700C ATV	700	2006->			0.8	CR7E	
750	750 TURBO	750		4		0.8	B9ES	BR9ES
750	GPX750R	750		4		0.7	D9EA	DR9EA
750	GPZ750	750		4		0.8	B9ES	BR9ES
750	GPZ750R	750		4		0.7	D8EA	DR8EA
750	GT750	750		4		0.8	B8ES	BR8ES
750	KSV750 ATV	750	2004->2006			0.8	CR7E	
750	KVF750 ATV	750	2005->			0.8	CR7E	
750	KZ750 TWIN	750		2		0.5	B6ES	BR6ES
750	KZX750	750		4		0.8	B9ES	BR9ES
750	LTD750	750	1985->	4		0.8	B8ES	BR8ES
750	NINJA 750R	750		4		0.7	D8EA	DR8EA
750	Z750	750	2004->			0.8	CR9EK	CR9E
750	Z750LTD	750		4		0.8	B8ES	BR8ES
750	Z750LTD TWIN	750		2		0.5	B6ES	BR6ES
750	ZEPHYR ZR750	750		4		0.7	DR8EA	
750	ZR750H	750	2001->2005			0.7	DR9EA	
750	ZR750R	750	2005->			0.8	CR9EK	CR9E
750	ZR750S	750	2005->			0.8	CR9EK	CR9E
750	ZR-7S	750	2001->	4		0.7	DR9EA	
750	ZX750F	750		4		0.8	B9ES	BR9ES
800	VN800A,CLASSIC	800		2		0.8	CR7E	
900	GPZ900R	900		4		0.7	D9EA	DR9EA
900	NINJA	900		4		0.7	D8EA	DR8EA
900	VN900	900	2009->			0.9	CPR7EA-9	
900	VN900 CLASSIC	900	2006->			0.9	CPR7EA-9	
900	ZX-9R NINJA	900	1994->	4		0.8	CR9EK	CR9E
1000	GPZ1000	1000		4		0.7	D8EA	DR8EA
1000	GPZ1000R	1000		4		0.7	D8EA	DR8EA
1000	GPZ1000RX	1000		4		0.7	D8EA	DR8EA
1000	KLV1000	1000	2004->			0.8	CR8EK	CR8E
1000	KZ1000J	1000		4		0.8	B8ES	BR8ES
1000	NINJA 1000R	1000		4		0.7	D8EA	DR8EA
1000	Z1	1000		4		0.8	B8ES	BR8ES
1000	Z1000	1000	2003->2006			0.8	CR9EK	CR9E
1000	Z1000	1000	2010->			0.9	CR9EIA-9	
1000	Z1000GTR	1000		4		0.7	D8EA	DR8EA
1000	Z1000LTD	1000		4		0.7	D8EA	DR8EA
1000	Z1000RX	1000		4		0.7	D8EA	DR8EA
1000	ZG1000	1000		4		0.7	D9EA	DR9EA
1000	ZX-10	1000		4		0.8	C9E	CR9E



MOTOR CYCLES



Model

Type

Capacity

Year

Cylinder

Engine

Gap

Recommended
Manufacturers
Specification

Alternative
15 000km
Service Interval

KAWASAKI

KAWASAKI

1000	ZX-10 R	1000	2004->2007			0.9	CR9EIA-9	
1000	ZX-10 R NINJA	1000	2006->			0.9	CR9EIA-9	
1000	ZX10R	1000	2010->			0.9	CR9EIA-9	
1000	ZX10R NINJA	1000	2004->			0.9	CR9EIA-9	
1100	GPZ1100	1100		4		0.8	B8ES	BR8ES
1100	GPZ1100,ABS	1100				0.8	CR9EK	CR9E
1100	LTD 1100	1100		4		0.8	B8ES	BR8ES
1100	Z1100JR	1100		4		0.6	B10ES	
1100	ZEPHYR ZR1100A	1100		4		0.8	CR9E	
1100	ZRX1100	1100				0.8	CR9EK	CR9E
1100	ZX1100 EDDIE LAWSON	1100		4		0.8	B8ES	BR8ES
1100	ZZR1100	1100		4		0.8	CR9E	
1200	VOYAGER-XII	1200		2		0.9	DP8EA-9	DPR8EA-9
1200	ZRX1200R,S	1200	2001->	4		0.8	CR9EK	CR9E
1200	ZX-12R NINJA	1200	2001->	4		0.7	CR9EKPA	CR9E
1200	ZZR1200	1200	2002->			0.8	CR9E	
1300	KZ1300A	1300		6		0.8	B8ES	BR8ES
1300	VOYAGER	1300		6		0.8	BPR6ES	BP6ES
1300	Z1300	1300		6		0.8	BPR6ES	BP6ES
1400	GTR1400	1400	2007->			0.9	CR9EIA-9	
1400	VULCAN	1400	2008->			1.1	ILZKARZB11	
1400	ZZR1400	1400	2006->			0.9	CR9EIA-9	
1500	VN1500 DRIFTER	1500	1999->			0.9	DPR5EA-9	
1500	VN1500	1500		2		0.9	DPR7EA-9	
1500	VNF1500F CLASSIC	1500	1998->			0.9	DPR5EA-9	
1600	VN1600	1600	2005->			0.9	DR6EA-9	
2000	VN2000	2053	2004->			1.1	IZFR6F-11	ZFR6F-11

KTM

KTM

50	PRO SENIOR	50	2000->			0.8	B8HVX	B8HS
50	SX	50	2008->			0.8	CR8HSA	
50	SX	50	2010->			0.8	LR8B	
50	SX PRO JNR	50	1999->1999			0.8	B8HS	BR8HS
50	SX PRO JNR	50	2000->2002			0.8	BR8HS	
50	SX PRO JNR	50	2003->2005			0.8	BR8ECM	
50	SX PRO SENIOR	50	2002->			0.8	BR10EG	
50		50	2008->			0.8	LR8A	
65	SX	65	2003->2009			0.8	BR8ECM	
65	SX	65	2008->			0.8	LR8B	
65	SX	65	2009->			0.8	LR8B	
80	CHOPPER	80		1		0.8	B9HS	BR9HS
85	SX17/14, 19/16	85	2010->			0.8	BR9ECMVX	
85		85	2006->2007			0.8	BR10ECMIX	
100	GS,MC	100		1		0.8	B9HS	BR9HS
125	COMT GP RS	125		1		0.8	B8HS	BR8HS
125	EXC	125	2000->			0.8	BR9EG	BR9ES
125	EXC SIX DAYS	125	2010->			0.8	BR9ECMVX	
125	GS125 12.7MM REACH	125		1		0.8	B8HS	BR8HS
125	GS127 19.0MM REACH	125		1		0.8	B9ES	BR9ES
125	LC	125		1		0.8	B9ES	BR9ES
125	MC125 12.7MM REACH	125		1		0.8	B8HS	BR8HS
125	MC125 19.0MM REACH	125		1		0.8	B9ES	BR9ES
125	MX,ENDURO	125		1		0.6	B10ES	
125	SUPERMOTO	125	2001->	1		0.8	BR8HS	
125	SX	125	2001->	1		0.8	BR9EG	BR9ES
150	SX,XC	150	2010->			0.8	BR9ECMVX	
175	GS,MC	175		1		0.8	B8HS	BR8HS
200	EXC	200	1998->			0.8	BR8EG	
200	EXC,XC-W	200	2010->			0.8	BR8EG	
200	SX	200	2003->			0.8	BR9EVX	
200	XC	200				0.8	BR8EIX	
250	MC 12.7MM REACH	250		1		0.8	B9HS	BR9HS
250	EXC ENDURO	250	2003->			0.8	BR7ES	
250	EXC GS	250	2003->			0.8	DCPR8E	
250	EXC,EXC SIX DAYS	250	2010->			0.8	BR7ES	
250	EXC-F	250	2007->			0.8	CR9EKB	
250	GS250 12.7MM REACH	250		1		0.8	B9HS	BR9HS
250	GS250 19.0MM REACH	250		1		0.8	B9ES	BR9ES
250	MC 12.7MM REACH	250		1		0.8	B9HS	BR9HS
250	MC 19.0MM REACH	250		1		0.8	B9ES	BR9ES
250	MC 19.0MM REACH	250		1		0.8	B9ES	BR9ES



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
KTM								
250	SX 4 TAKT	250	2005->2009			0.8	CR9EKB	KTM
250	SX-F	250	2003->2005			0.8	CR9EKB	
250	XC,XC-W	250	2010->			0.8	BR7ES	
250	XCF-W	250	2010->			0.8	CR9EKB	
300	EXC,EXC SIX DAYS	300	2010->			0.8	BR7ES	
300	XC,XC-W	300	2010->			0.8	BR7ES	
375	EXC RACING	375	2009->			0.9	LKAR8A-9	
390	FE	390	2010->			0.9	LKAR8AI-9	
400	EXC	400	2003->			0.8	DCPR8E	
400	EXC	400	2010->			0.9	LKAR8AI-9	
400	GS,MC,	400		2		0.8	B9HS	BR9HS
400	SX LC4	400	2000->	1		0.8	CR8EK	CR8E
400	XC-W	400	2010->			0.9	LKAR8AI-9	
450	EXC	450	2003->			0.8	DCPR8E	
450	EXC	450	2008->			0.8	LKAR8A-9	
450	EXC	450	2008->			0.9	LKAR8A-9	
450	EXC,EXC SIX DAYS	450	2010->			0.9	LKAR8AI-9	
450	FE,FX	450	2010->			0.9	LKAR8AI-9	
450	MXC,GS	450	2003->			0.8	DCPR8E	
450	SMR	450	2005->			0.8	DCPR8E	
450	SX	450	2003->			0.8	DCPR8E	
450	SX,SX-F	450	2010->			0.8	CR9EKB	
450	SX-F	450	2007->			0.8	CR9EKB	
450	SX-F	450	2007->			0.8	CR9EKB	
450	XC-W,XC-W SIX DAYS	450	2010->			0.9	LKAR8AI-9	
500	DXC,EXC	500				0.8	B9ES	BR9ES
500	GS	500			2 STROKE	0.8	B10EG	BR10EG
500	GS	500			4 STROKE	0.7	D8EA	DR8EA
500	MC	500		1		0.6	B10ES	
500	MX	500				0.8	B9EVX	
500	SX	500	1993->			0.6	B10ES	
505	SX	505	2010->			0.8	CR9EKB	
510	EXC RACING	510	2008->			0.9	LKAR8A-9	
510	XC DESERT RACING	510	2007->			0.8	DCPR8E	
520	EXC	520	1999->2002			0.8	CR8EK	CR8E
520	EXC	520	2002->			0.8	DCPR8E	
520	EXC LC4	520	2000->	1		0.8	CR8EK	CR8E
520	SX	520	1999->2002			0.8	CR8EK	CR8E
520	SX	520	2002->			0.8	DCPR8E	
525	EXC,MXC,SMR	525	2003->2005			0.8	DCPR8E	
530	EXC	530	2008->2009			0.9	LKAR8A-9	
530	EXC,SIX DAYS,XC-W,XC-W SIX DAYS	530	2010->			0.9	LKAR8AI-9	
570	FE,FS	570	2010->			0.9	LKAR8AI-9	
600	4TMX	600				0.9	DP9EA-9	DPR9EA-9
600	ENDURA	600				0.7	D8EA	DR8EA
600	MX	600				0.7	D8EA	DR8EA
640	ADV	625	2005->			0.8	KR8AI	
640	ADVENTURE	625	2000->			0.9	DPR8EA-9	
640	DUKE	625	1998->2001			0.7	DR8EA	
640	DUKE2 LC4	625	2000->	1		0.9	DPR8EA-9	
640	E SUPERMOTO LC4	625	2000->	1		0.9	DPR8EA-9	
640	LC4 RALLY ADV	625	1999->2002			0.7	DR8EA	
640	SUPERMOTO LC4	625	2001->			0.7	DR8EA	
650	ENDURA LC4	650	2008->			0.9	LKAR8A-9	
654	PRESTIGE	654	2007->			0.9	LKAR8AI-9	
660	LC4	650	2003->			0.7	DR9EA	
690	DUKE BLACK,ORANGE, WHITE	690	2010->			0.9	LKAR8AI-9	
690	ENDURO,ENDURO R	690	2010->			0.9	LKAR8AI-9	
690	SMC	690	2010->			0.9	LKAR8AI-9	
690	SUPERMOTO	690	2007->			0.9	LKAR8AI-9	
700	DUKE 3 LC4	700	2008->			0.9	LKAR8A-9	
780		780	2006->			0.9	LKAR8A-9	
950	ADV	950	2003->2005			0.8	CR8EIX	CR8E
950	ADVENTURE	950	2003->			0.8	CR8EK	CR8E
950	LC8	950	2003->			0.8	CR8EK	CR8E
950	LC8	950	2006->			0.8	KR8DI	
950	LC8 ADV	950	2003->2004			0.8	CR8EK	CR8E
950	LC8 EFI	950	2009->			0.8	KR8DI	
950	SUPER ENDURO	950	2006->			0.8	CR8EK	CR8E
950	SUPERMOTO	950	2005->			0.8	CR8EK	CR8E
990	SUPER DUKE OLIVE, ORANGE	990	2010->			0.8	KR8DI	



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
KTM								
990	SUPER DUKE R	990	2010->			0.9	LKAR8AI-9	KTM
990	SUPERMOTO R , T ORANGE, T SILVER	990	2010->			0.8	KR8DI	
1000	DUKE	1000	2004->			0.8	DCPR8E	
1000	SUPERDUKE	1000	2005->			0.8	DCPR8E	
1000	990 SUPERMOTO	1000	2009->			0.8	KR8DI	
1000	ADVENTURE S	1000	2006->			0.8	DCPR8E	
KYMCO								
50	ATV MX	50	2001->			0.8	BR8HSA	
50	ATV MXER	50	2002->2005			0.8	BR8HSA	
50	LIKE 50 2T	50	2009->			0.8	BR8HSA	
50	LIKE 50 4T	50	2009->			0.8	CR7HSA	
50	SENTO 50	50	2009->			0.8	CR7HSA	
50	SUPER8 50 2T	50	2009->			0.8	BR8HSA	
50	TOMOS TX	50	2001->			0.6	B6HS	BR6HS
90	ATV MONGOOSE	90	2004->2005			0.8	CR7HSA	
125	HIPSTER	125	2001->		2 VENTILER	0.7	DR8EA	
125	HIPSTER	125			4 VENTILER	0.8	CR8E	
125	DOWNTOWN 125I	125	2009->			0.8	CR7E	
125	LIKE 125	125	2009->			0.8	CR7HSA	
125	STRIKER	125		1		0.7	DR8EA	
125	STRYKER 2	125	2002->			0.7	DR8EA	
150	ATV	150	2002->2005			0.8	CR8E	
150	MX ATV	150	2001->			0.7	DR8EA	
200	DOWNTOWN 200I	200	2009->			0.8	CR7E	
200	LIKE 200I	200	2009->			0.8	CR7HSA	
250	ATV MONGOOSE	250	2004->2005			0.9	DPR7EA-9	
250	KXR ATV	250	2001->			0.9	DPR7EA-9	
250	MXU ATV	250	2005->			0.9	DPR7EA-9	
250	VENOX 4 TAKT	250				0.9	DPR7EA-9	
300	EXCITING 300I R	300	2009->			0.9	DPR6EA-9	
500	EXCITING 500I R	500	2009->			0.8	CR7E	
LAVERDA								
125	CU,GS	125				0.8	B8ES	BR8ES
125	CUSTOM STRADA	125				0.8	B9ES	BR9ES
125	LB UNO	125				0.8	B8ES	BR8ES
350	ALPINO	350				0.7	D9EA	DR9EA
500	ALPINO	500				0.7	D9EA	DR9EA
600	OR ATLAS	600				0.7	D8EA	DR8EA
750	GT GS S SFC SF2 2D	750		3		0.8	BPR7ES	
750	GTL	750		3		0.8	BPR7ES	
750	SF, SF COMPETIZIONE	750		3		0.6	B10ES	
750	SF2 1D, SF3	750		3		0.8	B8ES	BR8ES
750	SS, SPORT	750		3		0.6	B10ES	
1000	JARAMA JOTA EXEC	1000		3		0.8	B8ES	BR8ES
1000	SC, 3C,E, 3CL, SFC	1000		3		0.8	B8ES	BR8ES
1200	JOTA, MIRAGE	1200		3		0.8	B8ES	BR8ES
LEM								
50	ATV CAYMAN	50	1997->2004			0.8	BR8HS	
50	ATV CONDOR	50	1997->2004			0.8	BR8HS	
50	LX2	50		1		0.7	B7HS	BR7HS
LINHAI								
260		260	2005->			0.7	DR8EA	
MAICO								
125	GS,MC	125				0.8	B9ES	BR9ES
250	GS,MC	250		1		0.8	B9ES	BR9ES
250	GSE	250		1		0.8	B9ES	BR9ES
350	TAIFUN	350		1		0.7	B7HS	BR7HS
350		350		1		0.8	B8HS	BR8HS
360	GS,MC	360		1		0.5	B9HCS	
400	GS,MC	400		1		0.8	B9ES	BR9ES
450	MC	450		1		0.8	B9ES	BR9ES
490	GS,MC	490		1		0.8	B9ES	BR9ES
500	GS,MC	500		1		0.8	B9ES	BR9ES
MONTESA								
340	COTA 304 + COTA 335	340		1		0.8	BPR5ES	BP5ES



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
MOTO GUZZI						MOTO GUZZI		
500	V50, V50II, V50III	500		2		0.8	B7ES	BR7ES
650	SP	650		2		0.8	B7ES	BR7ES
650	V65 LARIO	650	->1986	2		0.7	C7HSA	CR7HSA
700	V7	700		2		0.8	B8ES	BR8ES
750	BREVA TOURING	750	2006->			0.8	BR8ES	
750	NEVADA CLASSIC IE	750	2004->			0.8	BR8ES	
750	S	750		2	V7 SPECIAL	0.8	B7ES	BR7ES
750	S	750		2	V7 SPORT	0.8	B7ES	BR7ES
750	V7 CAFE CLASSIC	750	2009->			0.8	BR8ES	
750	V7 CLASSIC	750	2008->			0.8	BR8ES	
850	LE MANS	850	1978->1981	2		0.8	BPR6ES	BP6ES
850	GT, CALIFORNIA,T3	850	1975->1981	2		0.8	BPR6ES	BP6ES
850	T	850		2		0.8	B8ES	BR8ES
850	T5	850	1983->1987	2		0.8	BPR6ES	BP6ES
850	V7 SPORT	850		2		0.8	B9ES	BR9ES
940	BELLAGIO	940	2007->			0.8	BPR6ES+PMR8B	
1000	LE MANS	1000		2		0.8	BPR6ES	BP6ES
1000	V G5 CONVERT,CX,XP	1000		2		0.8	BPR6ES	BP6ES
1100	V11 LE MANS NERO CORSA	1100	2004->			0.8	BPR6ES	
1100	V11 SCURA	1100	2003->			0.8	BPR6ES	
1150	GRISO 8V SPECIAL EDITION	1150	2009->			0.8	CR8EKB	
1150	NORGE GT 1200	1150	2006->2009			0.8	BPR6ES+PMR8B	
1150	STELVIO 1200	1150	2008->			0.8	CR8EKB	
1150	STELVIO 1200 NTX	1150	2009->			0.8	CR8EKB	
1200	BREVA	1200	2007->			0.8	BPR6ES+PMR8B	
1200	GT	1200	2006->			0.8	BPR6ES	
1200	GT TWIN SPARK	1200	2006->			0.8	BPR6ES+PMR8B	
1200	NORDE	1200	2006->			0.8	BPR6ES	
MV AGUSTA						MV AGUSTA		
750	BRUTALE	750		4		0.8	CR9EK	CR9E
750	F4 S1 BIPOSTO ORO S	750	2000->	4		0.8	CR9EK	CR9E
989	BRUTALE R	989	2008->			0.8	CR9EB	
1000	F4 SENNA	1000	2006->			1.0	R0045J-10	
1100	BRUTALE 1078RR	1100	2008->			0.8	CR9EB	
1100	F4 1078RR	1100	2008->			0.8	CR9EB	
PGO						PGO		
90	PMX	90				0.7	BP7HS	
110	PMX SPORT	110				0.7	BP7HS	
125	G-MAX	125	2006->			0.7	C7HSA	CR7HSA
125	T-REX	125	1999->			0.7	C7HSA	CR7HSA
PIAGGIO (VESPA)						PIAGGIO (VESPA)		
50	SCOOTER LX50 4T 4V	50	2010->			0.6	ER9EH-6N	
90	BIG MAX	90		1		0.7	BP7HS	
90	PMX	90		1		0.7	BP7HS	
90	TORNADO	90		1		0.7	BP7HS	
110	PMX	110		1		0.7	BP7HS	
125	SCOOTER GTS SUPER	125	2010->			0.8	CR8EKB	
125	T-REX	125		1		0.8	CR7HSA	
125	VESPA 125,P125X,SUPER	125		1		0.6	B6HS	BR6HS
125	VESPA 125GT, 125GTR	125		1		0.6	B6HS	BR6HS
150	VESPA 150E,S,X,SPRINT	150		1		0.6	B6HS	BR6HS
150	VESPA SUPER SPRINT VELOCE	150		1		0.6	B6HS	BR6HS
185	VESPA RALLY 180SS	185		1		0.5	B6ES	BR6ES
200	VESPA P200E, PX200E	200		1		0.5	B6ES	BR6ES
300	VESPA ET3 APECER-MP	300		1		0.7	B7HS	BR7HS
POLARIS						POLARIS		
200	ATV PHOENIX	200	2005->			0.8	CR7HSA	
250	2X4R TRAILER BLAZER	250		1		0.8	BR8ES	
250	ATV TRAIL BLAZER	250	1990->2006		PFE 153	0.8	BR8ES	
300	ATV HAWKEYE	300	2006->			0.8	CR8E	
325	2X4 R M/NUM	325	2000->	1		0.8	BKR6E	
325	2X4 T/BOSS	325		1		0.8	BKR6E	
325	4X4 M/NUM	325		1		0.8	BKR6E	
330	ATV MAGNUM	330	2005->			0.8	BKR6ES	
335	4X4 SPORTSMAN	335		1		0.8	BKR7E	
400	2X4,4X4 SCRAM	400		1		0.8	BR8ES	



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
POLARIS							POLARIS	
400	ATV SPORTSMAN	400	2003->2005		EC38	0.8	BKR5EY	
400	XPLOER	400		1		0.8	BR8ES	
425	XPEDITION	425		1		0.8	BKR5E	
450	ATV SPORTSMAN	450	2006->		EH460	0.8	BKR6E	
500	2X4 SCRAM	500		1		0.8	BKR5E	
500	4X4 R M/NUM	500		1		0.8	BKR5E	
500	4X4 R SCRAM	500		1		0.8	BKR5E	
500	4X4 SPORTSMAN	500		1		0.8	BKR5E	
500	6X6 RANGER	500		1		0.8	BKR5E	
500	6X6 SPORTSMAN	500		1		0.8	BKR6E	
500	ATV PREDATOR	500				0.8	DCPR8E	
500	ATV RANGER	500	2004->2006		EH50	0.8	BKR6E	
600	ATV SPORTSMAN	600	2003->2005		EH059	0.8	BKR7E	
700	ATV SPORTSMAN	700	2003->			0.8	BKR7E	
800	SPORTSMAN	800	2005->			0.8	BKR7E	
SUZUKI							SUZUKI	
50	50DC	50		1		0.7	BP4HS	BPR4HS
50	50N	50		1		0.6	BP6HS	BPR6HS
50	A50,D,E	50		1		0.8	B8HS	BR8HS
50	A50K	50		1		0.7	BP7HS	
50	AD50W,WK,WM,R	50		1		0.6	BP6HS	BPR6HS
50	C1 50F3	50		1		0.6	BP6HS	BPR6HS
50	CP50	50		1		0.6	BP6HS	BPR6HS
50	CP50F	50		1		0.6	BP6HS	BPR6HS
50	CS50	50		1		0.7	BP4HS	BPR4HS
50	CX50	50		1		0.6	BP6HS	BPR6HS
50	CY50	50		1		0.6	BP6HS	BPR6HS
50	CY50F	50		1		0.6	BP6HS	BPR6HS
50	DR 50ET	50		1		0.6	BP6HS	BPR6HS
50	FA50	50		1		0.7	BP4HS	BPR4HS
50	FA50/K	50		1		0.7	BP4HS	BPR4HS
50	FS50	50		1		0.7	BP4HS	BPR4HS
50	FZ50	50		1		0.7	BP4HS	BPR4HS
50	JR50,R,X,L,N	50		1		0.7	BP4HS	BPR4HS
50	LT50	50		1		0.7	BP4HS	BPR4HS
50	LT50E,L	50		1		0.7	BP4HS	BPR4HS
50	LT-A50 K2	50	2001->	1		0.7	BPR4HS	
50	QM50QWA	50		1		0.7	BP4HS	BPR4HS
50	RB 50	50		1		0.7	C6HSA	CR6HSA
50	RG50	50		1		0.8	B8ES	BR8ES
50	RG50E	50		1		0.8	BPR7ES	
50	RG50W,K,R	50		1		0.8	BPR7ES	
50	TS50,ER,ERA,ERAP,K,P,X	50		1		0.6	BP6HS	BPR6HS
50	TS50ERK	50		1		0.6	BP6HS	BPR6HS
50	TS50W,WG,WP	50		1		0.8	BPR7ES	
50	TS50XAE	50		1		0.6	BP6HS	BPR6HS
50	TV50M,P	50		1		0.8	BPR8ES	
80	A80	80		1		0.7	BP7HS	
80	DS80,X,L,N,P	80		1		0.8	B7ES	BR7ES
80	DS80,X,L,N,P	80		1		0.8	B7ES	BR7ES
80	FR80	80		1		0.6	BP6HS	BPR6HS
80	FR80M	80		1		0.6	BP6HS	BPR6HS
80	JR80	80	2001->	1		0.8	BPR7ES	
80	LT-80 ATV	80	1996->2005			0.8	BPR7HS	
80	LT80,M,N	80		1		0.7	BP7HS	
80	RM80,H,X,P,R,N	80		1		0.8	B9ES	BR9ES
80	RM80,M	80	1982->	1		0.8	B9ES	BR9ES
80	RM80E	80		1		0.8	B9ES	BR9ES
85	RM85	85	2002->2005			0.8	BR10ES	
85	RM85L	85	2002->2005			0.8	BR10ES	
85	RM85L	85				0.8	BR10ES	
90	RV90B	90		1		0.6	BP6HS	BPR6HS
100	A100	100		1		0.7	BP7HS	
100	A100M	100		1		0.6	BP6HS	BPR6HS
100	A100N	100		1		0.6	BP6HS	BPR6HS
100	AG100JT	100		1		0.7	BP7HS	
100	AX100	100		1		0.6	BP6HS	BPR6HS
100	FB100 SCOOTER,G	100		1		0.7	C6HSA	CR6HSA
100	GP100X	100		1		0.8	B8HS	BR8HS
100	RM100,X	100		1		0.8	B9ES	BR9ES



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
SUZUKI							SUZUKI	
120	B120M,D	120		1		0.7	BP7HS	
125	AN125	125				0.8	CR7E	
125	DR125SJ	125		1		0.7	D8EA	DR8EA
125	DR125SM	125	2008->			0.7	DR8EA	
125	DRZ125L	125				0.7	DR8EA	
125	GP125	125		1		0.8	B8HS	BR8HS
125	GS125D,ES	125		1		0.7	D8EA	DR8EA
125	RG125R	125				0.8	BR9ECM	
125	RM125	125	1986->	1		0.8	B9EG	BR9EG
125	RM125	125	1987->	1		0.8	B9ES	BR9ES
125	RM125	125	1996->2005			0.8	R6918B-9	
125	RM125F,N	125		1		0.8	B9EG	BR9EG
125	RV125 K7	125	2007->			0.8	CR8E	
125	TC125	125		1		0.8	B8HS	BR8HS
125	TF125	125				0.8	B7ES	BR7ES
125	TF125,X	125		1		0.8	B7ES	BR7ES
125	TS125X	125		1		0.8	B8ES	BR8ES
125	TS125XU	125		1		0.8	B8ES	BR8ES
160	LT160EK	160		1		0.7	D7EA	DR7EA
160	LTF160L ATV	160		1		0.9	DP7EA-9	DPR7EA-9
175	PE175	175	1979->	1		0.6	B10ES	
175	PE175	175	1978->	1		0.8	B8ES	BR8ES
175	PE175F	175		1		0.6	B10ES	
185	LT185	185	1986->	1		0.7	D7EA	DR7EA
185	LT185E,FE	185		1		0.7	D7EA	DR7EA
185	TC185	185		1		0.7	B7HS	BR7HS
185	TS185,X	185	1982->	1		0.8	B7ES	BR7ES
185	TS185,X	185	1977->	1		0.7	B7HS	BR7HS
185	TS185,X	185	1981->	1		0.8	BPR7ES	
185	TS185ERZ,ERP	185	1990->	1		0.8	BPR7ES	
200	B200	200	1981->	1		0.8	B8ES	BR8ES
200	B200	200	1980->	1		0.8	BPR6ES	BP6ES
200	B200N	200		1		0.8	B8ES	BR8ES
200	BURGMAN UH200	200	2007->			0.8	CR8EK	CR8E
200	DF200ET	200		1		0.7	DR8EA	
200	DR200	200		1		0.7	D8EA	DR8EA
200	DR200,J	200		1		0.7	D8EA	DR8EA
200	DR200SE	200	1996->2005			0.7	DR8EA	
200	GT200	200		2		0.8	B8ES	BR8ES
200	SB200Z	200		2		0.8	B8ES	BR8ES
200	TS200X	200		1		0.8	B8ES	BR8ES
200	TS200XF	200		1		0.8	B8ES	BR8ES
230	LT230GE	230		1		0.7	D7EA	DR7EA
230	LT230GE,GF,SF	230		1		0.7	D7EA	DR7EA
230	LT230GEF	230		1		0.7	D7EA	DR7EA
230	LT230S	230		1		0.7	D7EA	DR7EA
230	LT-F230	230		1		0.7	D7EA	DR7EA
250	DR250	250		1		0.7	D8EA	DR8EA
250	DR250S	250		1		0.7	D8EA	DR8EA
250	GN250	250				0.7	DR8EA	
250	GN250,D,EDM,N	250		1		0.7	D8EA	DR8EA
250	GSX250T,L	250		2		0.7	D8EA	DR8EA
250	GT250	250		2		0.8	B9ES	BR9ES
250	LT250EFF	250		1		0.7	D8EA	DR8EA
250	LT250RF	250		1		0.8	B8ES	BR8ES
250	LT-F 250 ATV	250	1999->2005			0.7	DR7EA	
250	LTF250K	250		1		0.7	D7EA	DR7EA
250	LT-Z 250 ATV	250	2005->2005			0.7	DR7EA	
250	PE250	250	1978->	1		0.8	B8ES	BR8ES
250	PE250	250	1979->	1		0.8	B9ES	BR9ES
250	PE250	250	1980->	1		0.6	B10ES	
250	RG250	250		2		0.8	B9ES	BR9ES
250	RG250WD,WE	250		2		0.8	B9ES	BR9ES
250	RGV250K	250		2		0.8	BR9ES	
250	RGV250P	250		2		0.8	BR9ECM	
250	RM250	250	1981->	1		0.8	B9ES	BR9ES
250	RM250	250	2001->2005			0.8	BR8EG	
250	RM250 K1	250	2001->	1		0.8	BR8EG	
250	RM250N	250		1		0.8	B8ES	BR8ES
250	RMX250W	250		1		0.8	B9EG	BR9EG
250	RMZ 250	250	2007->			1.0	CR8EIA-10	



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
SUZUKI								
250	RMZ250	250	2006->			1.0	CR8EIA-10	SUZUKI
250	RMZ250	250		1		0.8	CR8EB	
250	TS250,X	250		1		0.8	B8ES	BR8ES
300	LTF 300	300		1		0.7	D8EA	DR8EA
350	DR350SN,SP	350		1		0.9	DPR9EA-9	
370	SP370	370		1		0.7	D8EA	DR8EA
400	AN400	400				0.8	CR7E	
400	DR400	400		1		0.7	D8EA	DR8EA
400	DR400S	400		1		0.7	D8EA	DR8EA
400	DRZ400 S,Y,K1	400	2000->	1		0.8	CR8E	
400	DRZ400SM	400				0.8	CR8E	
400	GN400/TX,XX	400		1		0.7	D8EA	DR8EA
400	GN400T	400		1		0.7	D8EA	DR8EA
400	GS400,E,X	400		2		0.8	B8ES	BR8ES
400	GSX400E	400		2		0.7	D8EA	DR8EA
400	GSX400EF	400		2		0.7	D8EA	DR8EA
400	GSX400F	400		2		0.7	D8EA	DR8EA
400	GSX400T	400		2		0.7	D8EA	DR8EA
400	GSXR400	400	1993->			0.8	CR8EK	CR8E
400	GSXR400	400		2		0.7	C8HSA	
400	LT-A400F ATV	400	2002->2005			0.8	CR7E	
400	LTF-400F ATV	400	2002->2005			0.8	CR7E	
400	LT-Z 400 ATV	400	2003->2005			0.8	CR8E	
400	LTZ400	400	2002->			0.8	CR7E	
400	LTZ400 ATV	400	2003->2005			0.8	CR8E	
400	PE400,X	400		1		0.8	B9ES	BR9ES
400	RM400	400		1		0.8	B8ES	BR8ES
400	SP400	400		1		0.7	D8EA	DR8EA
425	GS425	425		2		0.8	B8ES	BR8ES
450	GS450E,ES,GA,L,T,TX	450		2		0.8	B8ES	BR8ES
450	GS450L	450		2		0.8	B8ES	BR8ES
450	GS450LF	450		2		0.8	B8ES	BR8ES
450	GS450SF	450		2		0.8	B8ES	BR8ES
450	LTR450 ATV	450	2007->			0.8	CR8EB	
450	RMX 450	450	2010->			1.0	DIMR8B-10	
450	RMZ450	450	2004->	1		1.0	CR8EIB-10	
450	RMZ450	450	2007->			1.0	DIMR8A-10	
450	RMZ450	450	2008->			1.0	DIMR8A-10	
465	RM465	465		1		0.8	B8ES	BR8ES
500	DR500,D	500		1		0.7	D8EA	DR8EA
500	DR500R	500		1		0.9	DP9EA-9	DPR9EA-9
500	DR500S	500		1		0.9	DP9EA-9	DPR9EA-9
500	GS500EM	500		4		0.9	DPR8EA-9	
500	GS500EP,ER	500		4		0.9	DPR8EA-9	
500	GS500F	500	2004->			0.9	DPR8EA-9	
500	LTA500F ATV	500				0.8	CR6E	
500	LT-F 500F ATV	500	2004->2005			0.8	CR7E	
500	LTF500 ATV	500	2007->			0.8	CR6E	
500	RG500	500		4		0.8	B9ES	BR9ES
500	RM500	500		1		0.8	B8ES	BR8ES
500	RM500E	500		1		0.8	B8ES	BR8ES
500	RM500F	500		1		0.8	B8ES	BR8ES
550	GS550,E,ES	550	1983->	2		0.8	B8ES	BR8ES
550	GS550,E,ES	550	1984->	2		0.7	D9EA	DR9EA
550	GS550M,P,TX	550		2		0.8	B8ES	BR8ES
600	DR600	600		1		0.9	DP9EA-9	DPR9EA-9
600	DR600S	600		1		0.9	DP9EA-9	DPR9EA-9
600	GSF600V	600		1		0.8	CR9EK	CR9E
600	GSR600	600				0.8	CR9E	
600	GSX600F KATANA	600	1996->2005			0.8	CR9EK	CR9E
600	GSX-R600	600	1997->2005			0.8	CR9E	
600	GSX-R600	600	2008->			0.9	CR9EIA-9	
600	GSXR600V	600		4		0.8	CR9E	
650	AN650	650				0.8	CR8E	
650	DL650 V-STORM	650	2004->2005			0.8	CR8EK	CR8E
650	DL650 V-STROM	650	2004->			0.8	CR8E	
650	DR650RSEP	650		1		0.9	DPR9EA-9	
650	DR650SE	650	1996->2005			0.8	CR10E	
650	DR650SE	650				0.8	CR10E	
650	GS650G,GE,GL,GT,GX,M	650		4		0.7	D8EA	DR8EA
650	GSF 650,S	650	2005->			0.8	CR8EK	CR8E



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
SUZUKI								
650	GSF650	650				0.8	CR9E	SUZUKI
650	GSF650 K7	650	2007->			0.8	CR9E	
650	GSF650S	650				0.8	CR9E	
650	GSX 650 A,SA	650	2008->			0.8	CR8E	
650	GSX 650 F	650	2008->			0.8	CR8E	
650	GSX650 A/SA	650	2008->			0.8	CR8E	
650	GSX650F	650	2008->			0.8	CR8E	
650	LS650P SAVAGE	650	1986->2005			0.9	DPR8EA-9	
650	SFV650 GLADIUS	650	2009->			0.9	CR9EIA-9	
650	SV 650	650	1999->2005			0.8	CR8E	
650	SV650,S	650	1999->2005			0.8	CR8E	
650	SV650,S	650		4		0.8	CR8E	
650	SV650S	650				0.8	CR8E	
650	V-STROM TRAVELLER	650	2010->			0.8	CR8EK	CR8E
650	XF650 FREEWIND	650	2000->	2		0.8	CR10E	
700	LT-A700X ATV	700	2005->			0.9	CR6EIA-9	
700	LT-V700F ATV	700	2005->			0.9	CR6EIA-9	
750	DR750S	750		1		0.9	DP9EA-9	DPR9EA-9
750	GS750	750	1980->	4		0.8	B8ES	BR8ES
750	GS750	750	1981->	4		0.7	D8EA	DR8EA
750	GS750D,E,P	750		4		0.8	B8ES	BR8ES
750	GS750ED,ESD,SD	750		4		0.7	D8EA	DR8EA
750	GS750S	750		4		0.7	D9EA	DR9EA
750	GSR750WN,WP	750		4		0.8	CR9EK	CR9E
750	GSX750,L,S,T	750		4		0.7	D8EA	DR8EA
750	GSX750E,EF,ES	750		4		0.7	D8EA	DR8EA
750	GSX750EE	750		4		0.7	D8EA	DR8EA
750	GSX750ES	750	1985->	4		0.7	D9EA	DR9EA
750	GSX750ES	750	1984->1984	4		0.7	D8EA	DR8EA
750	GSX750ESE	750		4		0.7	D8EA	DR8EA
750	GSX750F KATANA	750	1999->2005			0.8	CR9EK	CR9E
750	GSX750S	750		4		0.7	D8EA	DR8EA
750	GSR750	750	1994->2005			0.8	CR9E	
750	GSR750	750	2008->			0.9	CR9EIA-9	
750	GSR750	750		4		0.7	D9EA	DR9EA
750	GSR750 J,K	750		4		0.6	JR9C	
750	GSR750 K6	750	2006->			0.8	CR9E	
750	GSR750 Y,K1	750	2000->	4		0.8	CR9E	
750	GT750	750		3		0.8	B8ES	BR8ES
800	VL800 VOLUSIA	800	2001->	2		0.9	DPR7EA-9	
800	VX800L,N,P	800		2		0.9	DPR8EA-9	
800	VZ800	800	2009->			0.7	DR7EA	
800	VZ800	800				0.9	DPR7EA-9	
800	VZ800,M800	800	2005->			0.9	DPR7EA-9	
800	VZ800V	800		2		0.9	DPR8EA-9	
800	VZR1800	800				0.8	CR8EK	CR8E
850	GS850G	850		4		0.8	B8ES	BR8ES
850	GS850GE	850		4		0.8	B8ES	BR8ES
900	RF900RV	900		4		0.8	CR9E	
1000	DL1000 V STORM	1000	2002->2005			0.8	CR8EK	CR8E
1000	GS1000,D,E,GL,GX,H	1000		4		0.8	B8ES	BR8ES
1000	GS1000S	1000	1982->	4		0.8	B8ES	BR8ES
1000	GSX R-1000	1000	2001->2005			0.8	CR9E	
1000	GSX R-1000	1000	2001->2005			1.0	CR9EIX	
1000	GSX R-1000	1000	2009->			0.9	CR9EIA-9	
1000	GSX R-1000 K3	1000	2003->			0.8	CR9E	
1000	GSX R-1000 K1	1000		4		0.8	CR9E	
1000	GSX R-1000 K7	1000	2007->			0.9	CR9EIA-9	
1000	GSR1000	1000	2009->			0.9	CR9EIA-9	
1000	SV1000S	1000				0.8	CR8EK	CR8E
1000	TL1000R R	1000		2		0.8	CR9EK	CR9E
1000	TL1000SV SV	1000		2		0.8	CR9E	
1000	TL1000SW,SX,SY	1000		2		0.8	CR8EK	CR8E
1100	GS1100EF,ES	1100		4		0.7	D8EA	DR8EA
1100	GS1100G	1100		4		0.8	B8ES	BR8ES
1100	GSX1100E	1100	1986->	4		0.9	DP9EA-9	DPR9EA-9
1100	GSX1100E,S	1100	1985->	4		0.7	D8EA	DR8EA
1100	GSX1100EFF,ESF	1100		4		0.7	D9EA	DR9EA
1100	GSX1100F	1100		4		0.6	JR9C	
1100	GSR1100	1100		4		0.6	JR9C	
1100	GSR1100M	1100		4		0.7	JR9B	



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
SUZUKI								
1100	GSXR1100W	1100		4		0.8	CR9E	
1100	SGX1100	1100				0.7	DR8EA	
1200	GS 1200SS	1200		4		0.8	JR8B	
1200	GSF1200 BANDIT	1200	2000->	4		0.7	JR9B	
1200	GSF1200V	1200		4		0.7	JR9B	
1200	GSX1200	1200		4		0.7	JR9B	
1250	GSF1250 BANDIT	1250	2007->			0.8	CR7E	
1250	GSF1250S	1250				0.8	CR7E	
1300	GSX 1300 R HAYABUSA	1300	2008->			0.9	CR9EIA-9	
1300	GSX 1300R HAYABUSA	1300	1999->2005			0.8	CR9E	
1300	GSX1300	1300				0.8	CR9E	
1300	GSX1300RZ	1300				0.8	CR9E	
1300	GSXR1300 HAYABUSA	1300	1999->	4		0.8	CR9E	
1400	GSX1400	1400	2001->	4		0.8	CR8EK	CR8E
1400	VS1400GLPR	1400		2		0.9	DPR8EA-9	
1500	M1500 INTRUDER	1500	2009->			0.8	CR6E	
1500	VL1500	1500	1999->	2		0.9	DPR7EA-9	
1500	VL1500 INTRUDER C	1500	2005->			0.9	DPR7EA-9	
1800	C 1800 R INTRUDER	1800	2008->			0.8	CR8EK	CR8E
1800	C1800R INTRUDER	1800	2008->			0.8	CR8EK	CR8E
1800	M1800R INTRUDER	1800	2006->			0.8	CR8EK	CR8E
1800	VZR1800Z	1800				0.8	CR8EK	CR8E
SYM								
50	SIMPLY	50	2009->			0.8	CR7HSA	
50	SYMPHONY	50	2009->			0.8	CR7HSA	
100	JET	100	1999->			0.8	BR8HSA	
125	GTS	125	2006->			0.8	CR8E	
125	SHARK 125, R125	125	1999->			0.8	CR8E	
125	SIMPLY	125	2009->			0.8	CR7HSA	
125	SYMPHONY	125	2009->			0.8	CR7HSA	
125	WOLF	125	2005->			0.8	DR8EVX	
250	ATV QUADLANDER	250	2006->			0.8	BPR8HIX	
250	GTS	250	2006->			0.8	CR8E	
TM								
125	125EN	125	2003->	2		0.8	BR9EG	BR9ES
125	CROSS ENDURO	125	1994->	2		0.8	B10EG	BR10EG
250	250 EN	250	2003->			0.8	BR8EG	
250	250 EN-F	250	2004->			0.8	CR8E	
TRIUMPH								
650	T120R BONNEVILLE	650				0.8	BR8ES	
650	T120V BONNEVILLE	650				0.8	BR8ES	
675	SPEED TRIPLE	675	2007->			0.8	CR9EK	CR9E
750	T140D BONNEVILLE	750				0.8	BR6ES	
750	T140E BONNEVILLE	750				0.8	BR6ES	
750	TRIDENT LIQUID COOLED DOHC 95->	750		3	IN LINE	0.9	DPR9EA-9	
790	T140V BONNEVILLE	790	2001->2003		DOHC	0.9	DPR8EA-9	
865	BONNEVILLE T100	865	2008->			0.9	DPR8EA-9	
865	THRUXTON 900	865	2004->			0.9	DPR8EA-9	
900	ADVENTURER LIQUID COOLED DOHC 95->	900		3	IN LINE	0.9	DPR8EA-9	
900	DAYTONA LIQUID COOLED DOHC 95->	900		3	IN LINE	0.9	DPR9EA-9	
900	SPEED TRIPLE LIQUID COOLED 95->	900		3	IN-LINE	0.9	DPR8EA-9	
900	SPRINT LIQUID COOLED DOHC 95->	900		3	IN LINE	0.9	DPR8EA-9	
900	SUPER 111 LIQUID COOLED DOHC 95->	900		3	IN LINE	0.9	DPR9EA-9	
900	THUNDERBIRDTHUNDERBIRD LIQUID COOLED DOHC 95->	900		3	IN LINE	0.9	DPR8EA-9	
900	TIGER LIQUID COOLED DOHC 95->	900		3	IN LINE	0.9	DPR9EA-9	
900	TRIDENT LIQUID COOLED DOHC 95->	900		3	IN LINE	0.9	DPR9EA-9	
900	TROPHY LIQUID COOLED DOHC 95->	900		3	IN LINE	0.9	DPR9EA-9	
955	DAYTONA I	955	2002->2004			0.8	CR9EK	CR9E
1050	TIGER	1050	2006->			0.8	CR8EK	CR8E
1200	DAYTONA LIQUID COOLED DOHC 95->	1200		4	IN LINE	0.9	DPR9EA-9	
1200	TROPHY LIQUID COOLED DOHC 95->	1200		4	IN LINE	0.9	DPR9EA-9	
2300	ROCKET3	2300	2004->			0.9	DPR8EA-9	
VICTORY								
1634	HAMMER 100CU IN FREEDOM	1634	2006->			0.9	CPR6EB-9	
1634	NESS SIGNATURE JACKPOT	1634	2006->			0.9	CPR6EB-9	
1634	TOURING CRUISER	1634	2006->			0.9	CPR6EB-9	
1634	VEGAS	1634	2006->			0.9	CPR6EB-9	



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
VICTORY							VICTORY	
1634	VEGAS 8 BALL	1634	2006->			0.9	CPR6EB-9	
1634	VEGAS JACKPOT	1634	2006->			0.9	CPR6EB-9	
YAMAHA							YAMAHA	
50	BW R12	50	2001->	1		0.8	BR8HS	
50	CE50	50		1		0.7	BP4HS	BPR4HS
50	CW50W	50		1		0.7	BP7HS	
50	CY50	50		1		0.7	BPR6HS	
50	DT50 LC	50		1		0.8	B8ES	BR8ES
50	GT50B,D	50		1		0.7	B7HS	BR7HS
50	MR50,H	50		1		0.7	B7HS	BR7HS
50	PW50	50	1981->2006	1		0.7	BP4HS	BPR4HS
50	RD50DX	50		1		0.8	B8HS	BR8HS
50	RZ50	50		1		0.8	B8ES	BR8ES
50	RZ50K	50		1		0.8	B8ES	BR8ES
50	SA50,H,M	50		1		0.7	BP4HS	BPR4HS
50	SH50	50		1		0.6	BP6HS	BPR6HS
50	SH50T	50		1		0.6	BP6HS	BPR6HS
50	TTR50E	50	2006->			0.8	CR7HSA	
50	V50E	50		1		0.7	B7HS	BR7HS
50	YA50	50		1		1.0	BP7HS-10	BPR7HS-11
50	YB50,S	50		1		0.7	B7HS	BR7HS
50	YSR50	50		1		0.8	B8HS	BR8HS
60	JT1,L, JT2,M	60		1		0.7	B7HS	BR7HS
60	JT1,L, JT2,M	60		1		0.7	B7HS	BR7HS
60	YT60S	60		1		0.6	BP6HS	BPR6HS
80	CV80	80		1		0.7	BP7HS	
80	CV80J	80		1		0.6	BP6HS	BPR6HS
80	LB80	80		1		0.6	BP6HS	BPR6HS
80	LB80-2A,AC,AD,H,3,3D	80		1		0.6	B6HS	BR6HS
80	LB80-2HD	80		1		0.7	B7HS	BR7HS
80	LB80II	80		1		0.7	B7HS	BR7HS
80	PW80	80	1983->2006			0.7	BPR6HS	
80	PW80	80		1		0.6	BP6HS	BPR6HS
80	PW80K	80		1		0.6	BP6HS	BPR6HS
80	PW80L	80		1		0.6	BP6HS	BPR6HS
80	PW80N	80		1		0.6	BP6HS	BPR6HS
80	YFM 80G ATV	80	2005->2006			0.8	CR7HSA	
80	YFM80E	80		1		0.7	C7HSA	CR7HSA
80	YFM80N	80		1		0.7	C7HSA	CR7HSA
80	YZ80	80	1985->	1		0.8	B9ES	BR9ES
80	YZ80C,D,E,H	80		1		0.8	B8ES	BR8ES
80	YZ80E	80		1		0.8	B10EG	BR10EG
80	YZ80J	80		1		0.8	B9ES	BR9ES
80	YZ80K/L	80		1		0.8	B9ES	BR9ES
80	YZ80N	80		1		0.8	B9ES	BR9ES
80	YZ80S	80		1		0.8	B9ES	BR9ES
80	YZ80T	80		1		0.8	B9ES	BR9ES
85	YZ85	85	2006->			0.8	BR10EG	
90	TTR	90	2000->	1		0.7	CR6HSA	
90	V90	90		1		0.7	B7HS	BR7HS
90	YA90	90		1		0.8	BR7HS	
100	AG100	100	1980->	1		0.7	B7HS	BR7HS
100	AG100	100	1982->	1		0.8	B7ES	BR7ES
100	AG100H,J,K	100		1		0.8	B7ES	BR7ES
100	RT100	100	2000->	1		1.0	BR8HS-10	
100	RT100	100				0.8	B7EVX	BR7ES
100	RT100	100		1		0.8	BR7ES	
100	YB100	100		1		0.7	BP7HS	
100	YB100M	100		1		0.8	B8HS	BR8HS
100	YB100P	100		1		0.7	B7HS	BR7HS
100	YZ100,E,H,J	100		1		0.6	B10ES	
100	YZ100L	100		1		0.8	B9ES	BR9ES
110	TT R110 E	110	2008->			0.7	CR6HSA	
115	RX115	115		1		0.8	BP8HS	BPR8HS
125	DT125	125	1986->	1		0.8	B8ES	BR8ES
125	DT125E,ED,F,H,MX	125		1		0.8	B8ES	BR8ES
125	DT125K,J,LC	125		1		0.8	B8ES	BR8ES
125	DT125RE	125	2004->			0.8	B8ES	BR8ES
125	RD125	125				0.8	B8HVX	B8HS
125	RD125 12.7MM REACH	125		1		0.8	B8HS	BR8HS



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
YAMAHA								
125	RD125 19.0MM REACH	125		1		0.8	B8ES	BR8ES
125	RD125C	125		1		0.8	B8ES	BR8ES
125	RD125D-DX	125		1		0.8	B7ES	BR7ES
125	RD125LC	125		1		0.8	B8ES	BR8ES
125	RS125	125				0.8	B8HVX	B8HS
125	RS125E	125		1		0.7	B7HS	BR7HS
125	RZ125L	125		1		0.8	B8ES	BR8ES
125	TA125,A	125		1		0.6	B10ES	
125	TTR125E L T	125	2000->2006			0.8	CR7HSA	
125	TY125	125				0.8	B7EVX	BR7ES
125	TZR125	125		1		0.8	BR9ECM	
125	WR125R	125	2009->			0.8	CR8E	
125	WR125R,X	125	2009->			0.8	CR8E	
125	WR125X	125	2009->			0.8	CR8E	
125	XC125	125	2000->	1		0.8	CR7E	
125	XC125E	125	1985->2001			0.7	CR6HSA	
125	XC125S	125		1		0.7	C6HSA	CR6HSA
125	XC125SC	125		1		0.7	C6HSA	CR6HSA
125	XC125X	125		1		0.7	C6HSA	CR6HSA
125	XC125ZS	125		1		0.7	C6HSA	CR6HSA
125	XC125ZSC	125		1		0.7	C6HSA	CR6HSA
125	XN125	125	2000->	1		0.8	CR8E	
125	XT125R	125	2005->			0.8	CR7HSA	
125	XT125X	125	2005->			0.8	CR7HSA	
125	XV125	125		1		0.7	CR6HSA	
125	YB125 B,C,E,F	125		1		0.7	B7HS	BR7HS
125	YBR125	125	2005->			0.7	CR6HSA	
125	YFM 125 ATV	125	2005->2006		GHT	0.8	CR7HSA	
125	YP125XRX MAX	125	2006->			0.9	CPR9EA-9	
125	YZ125	125	1985->	1		0.8	B9ES	BR9ES
125	YZ125	125	2006->			0.8	BR9EIX	
125	YZ125	125	2006->			0.8	BR9EIX	
125	YZ125	125				0.8	BR9EIX	
125	YZ125B,C,H,K,L	125		1		0.8	B9ES	BR9ES
125	YZ125E	125		1		0.8	BR9EG	BR9ES
125	YZ125N	125		1		0.8	B9ES	BR9ES
125	YZ125S	125		1		0.8	B9ES	BR9ES
125	YZ125T	125		1		0.8	B9ES	BR9ES
125	YZFR 125	125	2008->			0.8	CR8E	
125	YZF-R125	125	2008->			0.8	CR8E	
135	RD135	132		1		0.8	BPR8HS	
175	AG175	175		1		0.8	B8ES	BR8ES
175	AG175H	175		1		0.8	B7ES	BR7ES
175	IT175,H,J,K	175		1		0.8	B9ES	BR9ES
176	DT180 AIR COOLED	176		1		0.8	BR8ES	
176	TDR180	176		1		0.8	BR8ES	
195	RS195	195		1		0.8	B7ES	BR7ES
200	AG200	200		1		0.7	D8EA	DR8EA
200	IT200	200		1		0.8	B9ES	BR9ES
200	IT200L	200		1		0.8	B9ES	BR9ES
200	IT200N	200		1		0.8	B9ES	BR9ES
200	IT200S	200		1		0.8	B9ES	BR9ES
200	NR200	200		1		0.8	B7ES	BR7ES
200	RD200B 12.7MM REACH	200		2		0.8	B8HS	BR8HS
200	RD200B 19.0MM REACH	200		2		0.8	B7ES	BR7ES
200	RD200C,C-DX,S	200		2		0.8	B7ES	BR7ES
200	TW200	200	2000->2006			0.7	DR8EA	
200	TW200	200		1		0.7	DR8EA	
200	TW200	200		2		0.7	DR8EA	
200	WR200R,RE	200		1		0.8	BR9ES	
200	XT200,JK,KC	200		1		0.7	D8EA	DR8EA
200	XT200N	200		1		0.7	D8EA	DR8EA
200	YFS 200 ATV	200	2001->2006			0.8	BR8ES	
200	YFS200 ATV	200	1990->2004			0.8	B8ES	BR8ES
200	YFS200E	200		1		0.8	B8ES	BR8ES
230	TTR230	230	2005->			0.7	DR8EA	
250	BLACK X-MAX	250	2009->			0.9	DPR8EA-9	
250	CP250 MORPHOUS	250	2006->			0.9	CPR7EA-9	
250	MG250	250		1		0.8	BPR7ES	BP7ES
250	RZ250L	250		2		0.8	B8ES	BR8ES
250	RZ250N	250		2		0.8	B9ES	BR9ES



MOTOR CYCLES



Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
YAMAHA								YAMAHA
250	RZ250RR	250		2		0.8	B9ES	BR9ES
250	SR250	250		1		0.8	BPR7ES	
250	TTR250	250	1999->2006			0.8	CR9E	
250	TY250/E	250	1984->	1		0.8	B7ES	BR7ES
250	TZ250	250	1988->	2		0.6	B10ES	
250	TZ250 3YLI	250	1991->	2		0.8	R5184-95	
250	TZ250U	250		2		0.8	R5184-95	
250	TZR250	250		2		0.8	B9ES	BR9ES
250	TZR250R	250	1993->	2		0.8	BR9ECM	
250	TZR250T	250		2		0.8	B9ES	BR9ES
250	WR250 2,2E	250		2		0.8	B8EG	B8ES
250	WR250F	250	2001->2005			0.8	CR8E	
250	WR250R	250	2008->			0.8	CR9EK	CR9E
250	WR250X	250	2008->			0.8	CR9EK	CR9E
250	XS250,C,H,RH,SE,SH	250		1		0.8	BPR7ES	BP7ES
250	XV250 VIRAGO	250	2006->			0.7	CR6HSA	
250	YFB250	250		1		0.7	DR7EA	
250	YFB250E	250		1		0.7	D7EA	DR7EA
250	YFM250 ATV	250	2005->			0.7	DR7EA	
250	YZ250	250	1996->2005			0.8	BR8EG	
250	YZ250	250	1996->2005			0.8	BR8EG	
250	YZ250,E,H,J	250		1		0.8	B9ES	BR9ES
250	YZ250,K,L	250		1		0.8	B9ES	BR9ES
250	YZ250E	250		1		0.8	B8EG	B8ES
250	YZ250F	250	2001->	1		0.8	CR8E	
250	YZ250F	250	2001->2005			0.8	CR8E	
250	YZ250N	250		1		0.8	B9ES	BR9ES
250	YZ250S	250		1		0.8	B8ES	BR8ES
250	YZ250T	250		1		0.8	B8ES	BR8ES
250	YZ250V	250	2006->			0.8	BR8EG	
350	RD350J,LC	350	1984->	2		0.8	B8ES	BR8ES
350	RZ350K,L	350		2		0.8	B8ES	BR8ES
350	XT350	350		1		0.7	D8EA	DR8EA
350	XT350E	350		1		0.7	D8EA	DR8EA
350	XT350N	350		1		0.7	D8EA	DR8EA
350	XT350NC	350		1		0.7	D8EA	DR8EA
350	XT350S	350		1		0.7	D8EA	DR8EA
350	YFM 350 ATV	350	2005->2006			0.7	DR8EA	
350	YFM350ERT	350		1		0.7	D8EA	DR8EA
350	YFP350	350		1		0.7	D8HS	
350	YFZ350 BANSHEE	350				0.8	BR8ES	
360	DT360	360		1		0.8	B9ES	BR9ES
360	YZ360	360		1		0.8	B8ES	BR8ES
400	DT400,H	400		1		0.8	B8ES	BR8ES
400	DT400E	400		1		0.8	B9ES	BR9ES
400	DT400MX	400		1		0.8	B9ES	BR9ES
400	IT400	400		1		0.8	B8ES	BR8ES
400	IT400E	400		1		0.8	B8ES	BR8ES
400	RD400	400		2		0.8	B8ES	BR8ES
400	RD400E	400		2		0.8	B8ES	BR8ES
400	XZ400	400		2		0.7	D8EA	DR8EA
400	YFM 400F ATV	400	2000->2006			0.7	DR8EA	
400	YFM400	400	2000->	1		0.7	DR8EA	
400	YFM400 AN ATV	400	2003->2004			0.7	DR8EA	
400	YFM400 FW ATV	400	1994->2004			0.7	DR8EA	
400	YFM450 FW AN	400	2003->2004			0.7	DR8EA	
400	YP400 ATV	400	2005->			0.8	CR7E	
400	YZ400,C,E	400		1		0.8	B8ES	BR8ES
425	IT425	425		1		0.8	B8ES	BR8ES
426	WR426	426	2000->	1		0.8	CR8E	
426	YZ426F	426	2000->	1		0.8	CR8E	
450	WR450F	450	2003->2005			0.8	CR8E	
450	WR450F	450	2003->2005			0.8	CR8E	
450	YFM 450F ATV	450	2003->2006			0.7	DR8EA	
450	YFZ450S	450	2004->			0.8	CR8E	
450	YFZ450S ATV	450	2004->			0.8	CR8E	
450	YZ450F	450	2003->			0.8	CR8E	
450	YZ450F	450	2003->2005			0.8	CR8E	
450	YZF 450V ATV	450	2006->			0.8	CR8E	
465	IT465,H,J	465		1		0.8	B8ES	BR8ES
465	YZ465,H	465		1		0.8	B8ES	BR8ES



MOTOR CYCLES



Model

Type

Capacity

Year

Cylinder

Engine

Gap

Recommended
Manufacturers
Specification

Alternative
15 000km
Service Interval

YAMAHA








YAMAHA

Model	Type	Capacity	Year	Cylinder	Engine	Gap	Recommended Manufacturers Specification	Alternative 15 000km Service Interval
490	IT490	490		1		0.8	B8ES	BR8ES
490	IT490K	490		1		0.8	B8ES	BR8ES
490	IT490L	490		1		0.8	B8ES	BR8ES
490	YZ490	490	1984->	1		0.8	B8ES	BR8ES
490	YZ490	490	1985->	1		0.8	B9ES	BR9ES
490	YZ490J	490		1		0.8	B8ES	BR8ES
490	YZ490K,L	490		1		0.8	B9ES	BR9ES
490	YZ490N	490		1		0.8	B9ES	BR9ES
490	YZ490S	490		1		0.8	B9ES	BR9ES
490	YZ490T	490		1		0.8	B9ES	BR9ES
500	RD500LC	500		2		0.8	B9HS	BR9HS
500	SC500	500		1		0.8	B8ES	BR8ES
500	SR500	500		1		0.8	BPR7ES	BP7ES
500	SR500,E,H	500		1		0.8	BPR7ES	BP7ES
500	TT500,C,E,H,J	500		1		0.8	BPR7ES	BP7ES
500	TX500	500		1		0.7	D8EA	DR8EA
500	XP500 T MAX	500	2000->	1		0.8	CR7E	
500	XT500	500				0.8	BP7EVX	BP7ES
500	XT500,C,E,H	500		1		0.8	BPR7ES	BP7ES
550	XJ550,H,J,RH,RJ	550		4		0.7	D8EA	DR8EA
550	XJ550K,L	550		4		0.7	D8EA	DR8EA
550	XT550,K	550		1		0.7	D7EA	DR7EA
550	XZ550	550		4		0.7	D8EA	DR8EA
550	XZ550RJ,RK	550		4		0.7	D8EA	DR8EA
600	FZ6	600	2004->2005			0.8	CR9EK	CR9E
600	FZR600R	600	1999->	4		0.8	CR9E	
600	FZS600 FAZER	600	1999->	4		0.8	CR8E	
600	TT600	600	1984->	1		0.7	D7EA	DR7EA
600	TT600	600	1986->	1		0.9	DP7EA-9	DPR7EA-9
600	TT600N	600		1		0.9	DP7EA-9	DPR7EA-9
600	TT600S	600		1		0.9	DP7EA-9	DPR7EA-9
600	XJ6	600	2009->			0.8	CR9E	
600	XT600E	600		1		0.9	DPR8EA-9	
600	YZF600	600		1		0.8	CR9E	
600	YZF600R	600	1995->2006			0.8	CR9E	
600	YZF600R	600	1999->2006			0.8	CR9E	
600	YZFR6	600	1999->2005			0.7	CR10EK	CR10E
650	XJ650 LJ TURBO	650		4		0.8	BPR7ES	
650	XJ650K,L	650		4		0.8	BPR7ES	
650	XT660X	650	2006->			0.8	CR7E	
650	XVS650-A	650	2006->			0.9	DPR7EA-9	
660	MT 03	660	2006->			0.8	CR7E	
660	XT660X,R	660	2004->			0.8	CR7E	
660	YFM 660 ATV GRIZZLY	660	2002->2004			0.9	DPR8EA-9	
660	YFM660R RAPTOR	660	2001->	1		0.9	DPR8EA-9	
700	YFM 700RV ATV	700	2006->2006			0.8	CR8E	
700	YFM700 RAPTOR ATV	700	2007->			0.8	CR8E	
700	YFM700F GRIZZLY	700	2009->			0.9	LMAR6A-9	
750	FZ750N	750		4		0.9	DP8EA-9	DPR8EA-9
750	FZ750T	750		4		0.7	D8EA	DR8EA
750	FZR750R	750		4		0.9	DP8EA-9	DPR8EA-9
750	XJ750	750		4		0.8	BPR7ES	
750	XJ750K	750		4		0.8	BPR7ES	BP7ES
750	XJ750MK,RK	750		4		0.8	BPR7ES	BP7ES
750	XJ750RL	750		4		0.8	BPR7ES	
750	YZF750 R7	750	2000->	4		0.8	CR9E	
900	XJ900	900		4		0.8	BPR7ES	
900	XJ900,K,RL,P,FN,N	900		4		0.8	BPR7ES	
900	XJ900F	900		4		0.8	BPR7ES	
950	XVS950A MIDNIGHT STAR	950	2009->			0.9	CPR7EA-9	
950	XVS950A MIDNIGHT STAR	950	2009->			0.9	CPR7EA-9	
1000	FZ 1	1000	2006->			0.8	CR9EK	CR9E
1000	FZR1000	1000		4		0.7	D8EA	DR8EA
1000	FZR1000E	1000		4		0.7	DR8EA	
1000	FZS1000 FAZER	1000	2001->	4		0.8	CR9E	
1000	R1 YZF	1000	1998->			0.8	CR9E	
1000	R1 YZF	1000	2002->	4		1.0	CR9EIX	
1000	R1 YZF	1000	2002->2003			0.9	CR9EIA-9	
1000	R1 YZF	1000	2004->			0.8	CR9EK	CR9E
1000	R1 YZF	1000	2004->2005			0.8	CR9EK	CR9E
1000	R1 YZF	1000	2007->			0.8	CR9EK	CR9E



MOTOR CYCLES


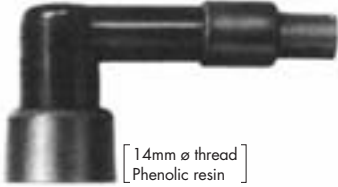

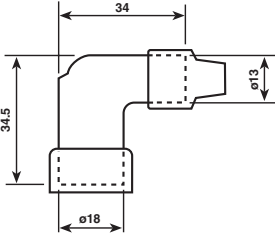







Model	Type	 Capacity	 Year	 Cylinder	 Engine	 Gap	 Recommended Manufacturers Specification	 Alternative 15 000km Service Interval
YAMAHA								YAMAHA
1000	R1 YZF	1000	2007->2008			0.8	CR9EK	CR9E
1000	R1 YZF	1000	2009->	4		0.8	LMAR9E-J	
1100	FJ1100	1100		4		0.9	DPR8EA-9	
1100	XS1100,E,H,S,SH,LH,RH	1100		3		0.8	BPR6ES	BP6ES
1100	XV1100	1100		2		0.8	BPR7ES	
1100	XVS1100	1100	2000->	4		0.8	BR7ES	
1100	XVS1100 V-STAR CLASSIC	1100	1999->2006			0.8	BPR7ES	
1200	FJ1200	1200		4		0.9	DP8EA-9	DPR8EA-9
1200	FJ1200S	1200		4		0.9	DP8EA-9	DPR8EA-9
1200	FJ1200T	1200		4		0.9	DP8EA-9	DPR8EA-9
1200	VMX1200 V-MAX	1200	1985->2006			0.9	DPR8EA-9	
1300	FJR1300	1300	2001->	4		0.8	CR8E	
1300	FJR1300	1300	2003->2005			0.8	CR8E	
1300	V-STAR	1300	2007->			0.9	LMAR7A-9	
1300	XJR1300 SP	1300	1999->	4		0.9	DPR8EA-9	
1300	XVS 1300 A	1300	2007->			0.9	LMAR7A-9	
1300	XVZ13C ROYAL STAR MIDNIGHT ADVENTURE	1300	2005->2006			0.9	DPR8EA-9	
1300	XVZ13STD,TOURER	1300		2		0.9	DPR8EA-9	
1600	XV1600	1600		2		0.9	DPR7EA-9	
1700	XV1700 ROAD STAR	1700	2002->2005			0.9	DPR7EA-9	



NGK SPARK PLUG RESISTOR COVER


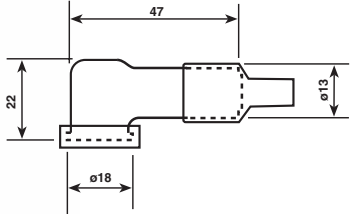

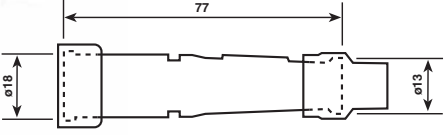

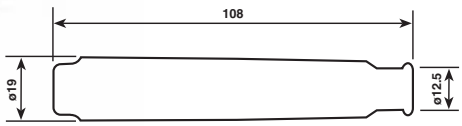

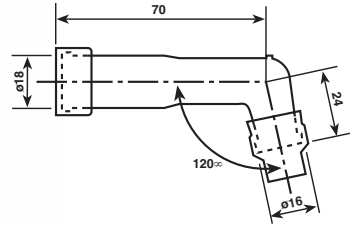

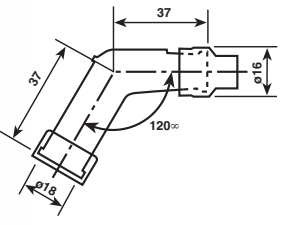

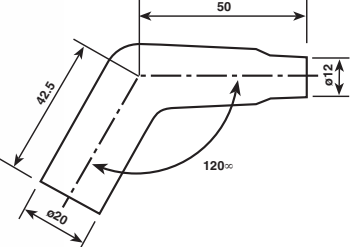

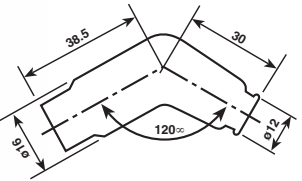


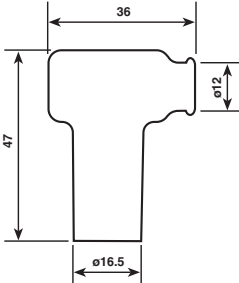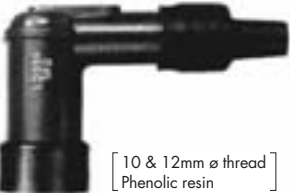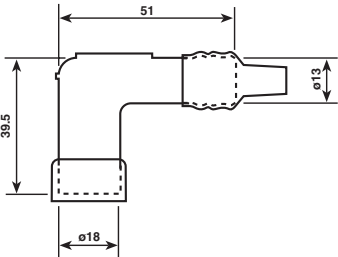Configuration (application plug thread dia, body material) Unit: mm	Type No.	(kΩ)
 <p>LE, LB type: 14mm ø thread LD type: 10 & 12mm ø thread Phenolic resin</p> <p><Excluding LB○EZ type></p>  <p>[14mm ø thread] Phenolic resin</p> <p><Excluding LB○EZ></p>	LBE LBEPK LB○E LB○EP LB○EZ LB○EPK LBF LB○F LB○FP LZ○F	No resistor No resistor 1,5,10 1,5,10 1,5,10 1,5,10 No resistor 1,5,10 1,5,10 1,5,10
 	LZEH LZFH	No resistor
 <p>LB type: 14mm ø thread LZ type: 10, 12 & 14mm ø thread Phenolic resin</p>	LEH LB○EH LB○EHF LB○EHFK LDFH	No resistor 1,5,10 1,5,10 1,5,10 No resistor
 <p>[14mm ø thread] Rubber sheathed</p> 	LB○EMH	5
 <p>[10 & 12mm ø thread] Phenolic resin</p> 	LDF LD○F	No resistor 1,5,10



NGK SPARK PLUG RESISTOR COVER


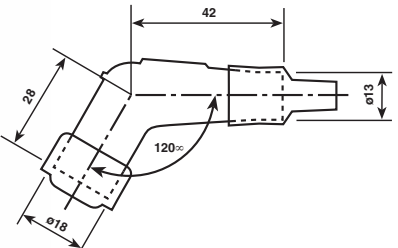

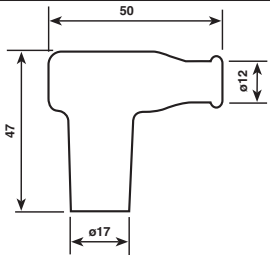

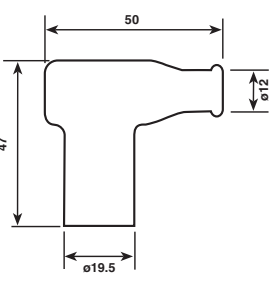

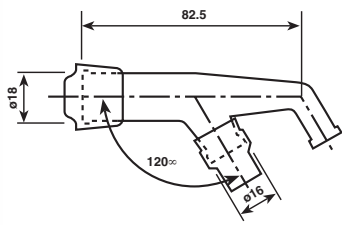



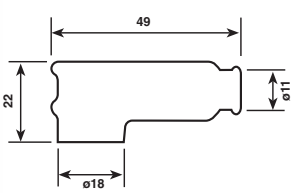


Configuration (application plug thread dia, body material) Unit: mm	Type No.	(kΩ)
 <p>[10mm ϕ CM-6 only] Phenolic resin</p> 	LC ○EFK	1,5,10
 <p>SB type: 14mm ϕ thread SD type: 10 & 12mm ϕ thread SZ type: 10, 12mm & 14mm ϕ thread Phenolic resin</p> 	SB ○E SB ○F SB ○FP SD ○F SD ○FP SZ ○F	1,5,10 1,5,10 1,5,10 1,5,10 1,5,10 1,5,10
 <p>[10 & 12mm ϕ thread] Rubber sheathed</p> 	SD ○FM	5
 <p>XB type: 14mm ϕ thread XD type: 10 & 12mm ϕ thread XZ type: 10, 12mm & 14mm ϕ thread Phenolic resin</p> 	XB ○F XB ○FP XD ○F XD ○FP XZ ○F	1,5,10 1,5,10 1,5,10 1,5,10 1,5,10
 <p>VB type: 14mm ϕ thread VD type: 10, 12mm ϕ thread Phenolic resin</p> 	VB ○E VB F VB ○F VB ○FP VD ○F VD ○FP	1,5,10 No resistor 1,5,10 1,5,10 1,5,10 1,5,10
 <p>[10 & 12mm ϕ thread] Rubber sheathed (Silicon)</p> 	VD ○FML	5
 <p>[10 & 12mm ϕ thread] Rubber Sheathed</p> 	VD ○FMH	5



NGK SPARK PLUG RESISTOR COVER


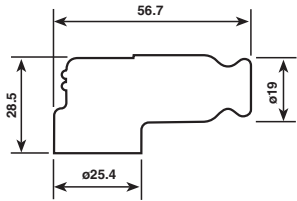


Configuration (application plug thread dia, body material) Unit: mm	Type No.	
 <p> YB type: 14mm \varnothing thread YD type: 10 & 12mm \varnothing thread Phenolic resin </p> 	YB\circF YB\circFP YD\circF	1,5,10 5 1,5
 <p> 14mm \varnothing thread Rubber Sheathed (Silicon) </p> 	TB\circEM	5,10
 <p> 14mm \varnothing thread Rubber sheathed </p> 	TB\circEMA	5
 <p> 14mm \varnothing thread Polyester Resin </p> 	VB\circEYK	5
 <p> 14mm \varnothing thread Rubber Sheathed (Silicon) </p> 	LBER	No resistor
 <p> 14mm \varnothing thread Rubber Sheathed (Silicon) For racing spark plug R6120-\circ only </p> 	TRS1225	5





NGK SPARK PLUG RESISTOR COVER



Configuration (application plug thread dia, body material) Unit: mm	Type No.	 (KΩ)
<div style="display: flex; align-items: center;"> <div style="border: 1px solid black; padding: 5px; margin-right: 20px;"> <p>14mm ø thread Rubber Sheathed (Silicon)</p> <p>For racing spark plug R5300A-○, R5300N-○ only</p> </div>  </div>	TRS1408F	5

SYMBOL EXPLANATION

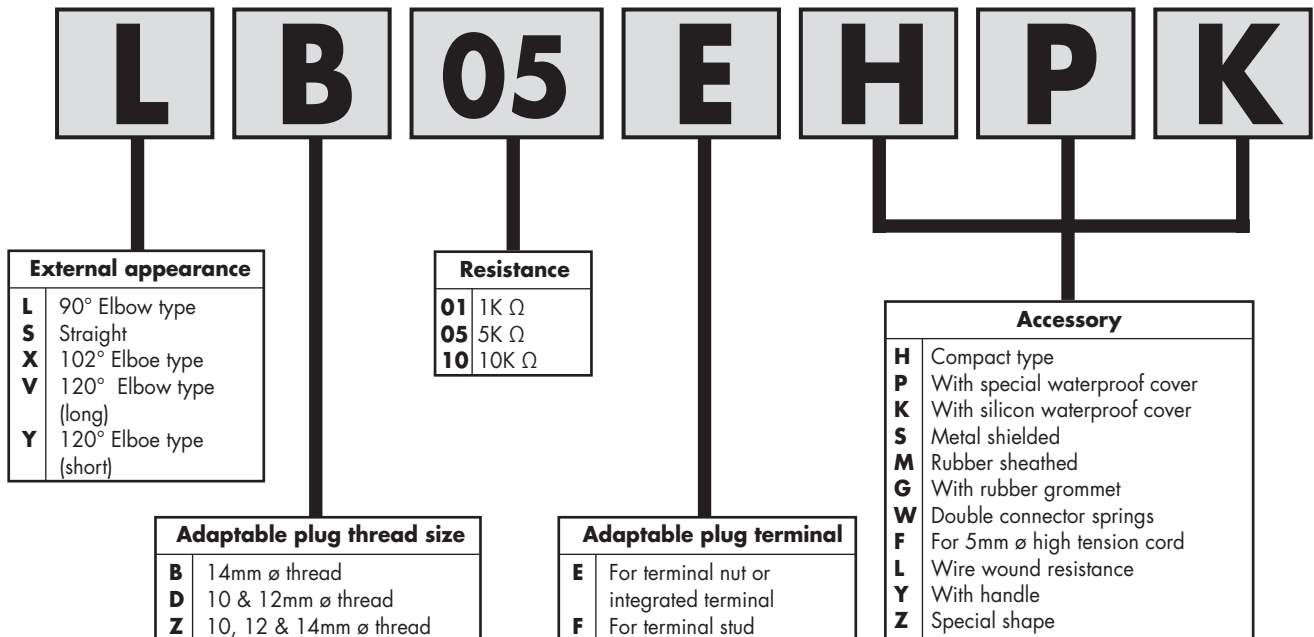



SPARK PLUG CONVERSION CHART

AC to NGK




AC	NGK	AC	NGK	AC	NGK	AC	NGK
40TS	BP7FS	C43L	B-6L	CSR45	BMR6A	R42CTS	BPR6FS
41-267	BKR4E-11	C43N	B6ES	FR2LSK	BKR6E	R42CXL	BR8ES
41-2XLS	BP7ES	C44	B6S	FR3CLS	BKR5E	R42CXLS	BPR6ES
41-4XLS	BP6ES	C44N	B6ES	FR3CLS6	BKR5E-11	R42FS	BPR6HS
41-600	BPR5EFS-13;TR55IX	C44NS	BP5ES	FR3LM	ZFR5A-11	R42LTS	BPR6EFS
41-603	BKR4E	C44S	BP5S	FR3LS	BKR5E	R42LTSM	BPR5EFS-13
41-606	BPR5EFS-13;TR55IX	C44XL	B6ES	FR3LS6	BKR5E-11	R42S	BP6S
41-610	BKR4E-11	C45	B-4	FR3LSJ	BKR4E-11	R42T	BR6FS
41-611	BKR4E-11	C45L	B-4L	FR3LSK	BKR5E	R42TS	BPR6FS
41-628	BKR4E-11	C49	B-2	FR4LE	ZFR4F-11/ZF4A-11	R42TSM	BPR6FS
41-900	BPR5EFIX-13P	C73	G-2Z	FR4LSJ	BKR4E-11	R42TX	BR6FS-15
41-904	BPR5EFIX-13P	C75	G-2Z	FR5LS	BKR5E	R42XL	BR8ES
41-905	PTR5C-13	C81	A-8	LM46	B4-LM	R42XLS	BPR6ES
41-906	BPR5EFIX-13P	C82	A-7	LM49	B4-LM	R42XLMS	ZGR5C
41-921	TR4IX	C83	A-7	M40FFX	B9HS-10	R 43	BR6S
41-928	TR5-11X	C83T	A6FS	M41FF	B8HS	R43C	BR6S
41-929	TR55IX	C84T	A6FS	M41K	B8S	R43CFS	BPR6HS
41-932	TR55IX	C85TS	AP5FS	M42FF	B7HS	R43CNTSE	TR5-11X
41-933	TR4IX	C86	A-6	M42K	B7S	R43CS	BP6S
41-940	TR4IX	C87	A-6	M43FF	B6HS	R43CT	BR6FS
41-942	TR4IX	C88	AB-2	M43S	BP6S	R43CTS	BPR6FS
41-943	TR4IX	C88L	AB-2	M44C	B6S	R43CTS6	BPR6FS
41-947	BPR5EFIX-13P	CR42CFS	BPR6FS	M44L	B-6L	R43CXL	BR7ES
41-948	TR4IX	CR42CXLS	BPR6ES	M45	B-4	R43CXLS	BPR6ES
41-950	PTR5C-13	CR42N	BR7ES	M45FF	B5HS	R43FS	BPR6HS
41-950	TR55IX	CR43	BR6S	M47	BI4	R43LTS	BPR6EFS
41-952	BPR5EFIX-13P	CR43CXLS	BPR6ES	MB42K	B6S	R43LTSE	TR4IX
41-963	PTR5C-13	CR43K	BR6S	MR42K	BR6S	R43LTSX	BPR6EFS-13
41-985	ITR6F-13	CR43N	BR6ES	MR42LTS	BPR6EFS	R43N	BR7ES
41TS	BP6FS	CR43S	BP6S	MR43LTS	BPR5EFS	R43NTSE	TR5-11X
41XL	B9ES	CR43TS	BPR5FS-11	MR43T	BR6FS	R43S	BP6S
41XLS	BP7ES	CR43TSM	BPR5FS	MR44C	BR6S	R43T	BR6FS
B4031	B-4	CR44N	BR6ES	MR44T	BR5FS	R43TS	BPR6FS
B43	B6S	CR44NS	BPR5ES	R41-5TS	BPR6FS	R43TS	BPR6FS
B44S	BP5S(XR5IX)	CR44TS	BPR5FS-11	R41CF	BR7HS	R43TSK	BPR6FS
B45	B-4	CR83T	AR6FS	R41CXL	BR9ES	R43TSX	BPR6FS
C42-1	B6S	CS40	BM7A	R41CXLS	BPR7ES	R43TX	BR6FS-15
C42CFS	BP6HS	CS41	BM7A	R41TS	BPR6FS	R43XL	BR7ES
C42CLTS	BP6EFS	CS41T	BM7F	R42-5LTS	BPR6EFS	R43XLS	BPR6ES
C42CXLS	BP6ES	CS42	BM7A	R42-5TS	BPR6FS	R 44	BR6S
C42LTS	BP6EFS	CS42S	BM7A	R42-6FS	BPR6HS	R44CF	BR5HS
C42N	B7ES	CS42T	BM6F	R42CF	BR6HS	R44CNTSE	TR5-11X
C42XLS	BP5ES	CS45	BM6A	R42CFS	BPR6HS	R44CXL	BR6ES
C43	B6S	CS45T	BM6F	R42CLTS	BPR6EFS	R44CXLS	BPR5ES
C43CXLS	BP6ES	CS49	BM4A	R42CT	BR6FS	R44F	BR5HS



SPARK PLUG CONVERSION CHART

AC to **NGK** • Autolite to **NGK** • Bosch to **NGK**




AC	NGK
R44LTS	BPR5EFS
R44LTS6	BPR5EFS
R44LTS6K	BPR5EFS-13
R44LTSM	TR4IX
R44LTSM6	TR4IX
R44N	BR6ES
R44NS	BPR5ES
R44NTSE	TR5-1IX
R44S	BP5S
R44T	BR5FS
R44TS	BPR5FS
R44TSX	BPR5FS-15
R44TX	BR5FS-15
R44XL	BR6ES
R44XLS	BPR5ES
R44XLS6	BPR4ES-13
R44XLSE	ZGR5C
R44XLSM	ZGR5C
R45LTS6	BPR5EFS-13
R45LTS6K	BPR5EFS-13
R45NS	BPR5ES
R45NSX	BPR5ES-13
R45NTSE	TR5-1IX
R45S	BP5S
R45T	BR5FS
R45TS	BPR4FS
R45TSX	BPR4FS-15
R45XL	BR6ES
R45XLS	BPR5ES
R 46	BR6S
R46LTS	BPR5EFS
R46N	BR5ES
R46S	BP-4
R46T	BR5FS
R46TS	BPR4FS
R46TSX	BPR4FS
R46TX	BR5FS-15
R46XL	BR5ES
R46XLS	BPR4ES
R47S	BP-4
R83CT	AR6FS
R83CTS	APR6FS
R83TS	APR6FS
R84TS	APR5FS
R85TS	APR5FS

AC	NGK
S102F	C7HSA
S104F	C6HSA
S121F	D8HA
S121XL	D8EA
S122F	D8HA
S123XL	D7EA
S124FS	D6HA
S404XLG	B10EG
S408XLG	B9EG
S40F	B9HS
S40FR	BR9HS
S40XL	B10ES
S40XLG	B9ECS
S40XLR	BR8ES
S41F	B8HS
S41FG	B7HCS
S41FR	BR8HS
S41XL	B9ES
S41XLG	B8ECS
S41XLR	BR9ES
S42	B7S
S42F	B7HS
S42FR	BR7HS
S42XL	B8ES
S42XLR	BR8ES
S43XL	B7ES
S43XLR	BR7ES
S44	B6S
S44F	B5HS
S44XL	B6ES
S45F	B5HS
S46	B-4
S81F	A-8
S82F	A-8
S83F	A-7
S85F	A-6
SB41	B7S
SV4XL	BUE
V40FFK	BUHW-2
V40FFM	BUHW
V40FFS	BUH
VB40FFM	BUHXW-1
VR40FFK	BUZHW-2
VR40FFM	BUZHW

Autolite	NGK
12	BP7FS
13	BP6FS
14	BP6FS
15	BP5FS
16	BP4FS
23	BPR6FS
24	BPR6FS
2795	C7HSA
2796	C6HSA
2976	BPMR7A
3203	BPR6ES
3243	BPR6EFS
3345	BMR7A
3364	BPR6HS
3666	B4LM
3684	BR7HS
3686	BR6HS
3922	BCPR7ES
3924	BKR6E
3926	BKR5E
3954	D8EA
3964	DR8ES-L
3985	BPR6FS-15
4043	BPR6ES-11
4056	B6ES
4063	BR9ES
4092	B7HS
4093	B7HS
4114	BP6HS
4123	BPR6HS
4132	D8EA
4153	DP8EA-9
4162	DPR9EA-9
4193	C7HSA
4253	BP6ES
4263	BPR6ES
4265	BPR5ES
9062	BP6ET
9921	BCPR6ET
AP63	PFR6B

Bosch	NGK
D10B	AP5FS
D6B	AP6FS
D6BC	AP6FS
D6BP	AP6FS
D7AC	A6FS
D7B	AP6FS
D7BC	AP6FS
D7BP	AP6FS
D8B	AP5FS
D8BC	AP5FS
D8BP	AP5FS
D9BC	AP5FS
DR10BC	APR5FS
DR6BC	APR6FS
DR6BP	APR6FS
DR7BP	APR6FS
DR8BP	APR5FS
DR9B	APR5FS
DR9BC	APR5FS
F5DC	BCP7ES
F5DP	BCP7ES
F5DPOR	PFR7B
F5DTC	BCP7ET
F6DC	BCP6ES
F6DCO	BCP6ES
F6DCX	BCP6ES-11
F6DP	BCP6ES
F6DPX	BCP6ES-11
F6DTC	BCP6ET
F6DTC	BCP6ET
F6MPP332	ILFR6A
F7DC	BCP6ES
F7DER	BKR6E
F7DPP332	IFR6D-10
F7HPP222	PZFR5D-11
F7HPP222U	PZFR6J-11
F7KPP332U	PFR6X-11
F7KTCR	BKUR6ET-10
F7LCOR2	ZFR6F-11
F7LCR	ZFR6A-11
F7LDCR	BKR6EK
F7LDCR	BKR6EK
F7ITCR	BKUR6ET-10
F8DC	BCP5ES
F8DC4	BCP5ES



SPARK PLUG CONVERSION CHART

Bosch to **NGK**






Bosch	NGK	Bosch	NGK	Bosch	NGK	Bosch	NGK
F8DPER	IFR5D-10	FR7DC	BCPR6ES	FR8DS	BKR5EKU	HR10B	BPR4FS
F8DPP332	IFR5D-10	FR7DC2	BKR6E	FR8DX	BCPR5ES-11	HR10BC	BPR4FS
F8KTCR	BKUR5ET	FR7DC9	BKR6E	FR8HC	ZFR5F-11	HR10BCX	BPR4FS-11
F8LCR	ZFR5F	FR7DCX	BCPR6ES-11	FR8HP	ZFR5F-11	HR10BCY	BPR4FS-15
F8LCR2	ZFR5F	FR7DCX+	BCPR6ES-11	FR8KCU	BKR5EYA-11	HR10BX	BPR4FS-11
F8LDCR	BKR6EK	FR7DCX+	BKR5E-11	FR8LCX	ZFR5A-11	HR10BY	BPR4FS-15
F9LCR	ZFR4F-11	FR7DC+	BKR5ES	FR8LDC	BKR5EK	HR6BP	BPR6FS
FGR6HQEO	ZFR6S-Q	FR7DC+	BKR6EKPA	FR8LDC4	BKR5EK	HR6D	BPR6EFS
FGR6KQC	BKR6EQUP	FR7DC+	BKR6ES	FR8ME	LF5A-11	HR6DC	BPR6EFS
FGR6KQE	BKR6EQUP	FR7DE	BKR6EZ	FR8ME	LF5B	HR6DPP33V	ITR6F-13
FGR7DQEO	BKR6EKUB	FR7DP1X	PFR6B-11	FR8ME	PLFR5A-11	HR6DS	BPR6EFS
FGR7DQE+	BKR6EKUB	FR7DPP22U	IFR6D-10	FR8SEO	LF6B	HR7DC	BPR6EFS
FGR7DQP	BKR6EQUP	FR7DPP22U	PFR5G-11	FR9DCX	BCPR4ES-11	HR7DPP22	PTR6F-13
FL7HTCOR	BKUR5ETC-10	FR7DPP22U	PFR5J-11	FR9HC	ZFR4F-11	HR7D+	BPR6EFS
FLR8DCU	BKR5EK	FR7DPP22U	PFR5N-11	FR9HC	ZFR4F-11	HR7MPP	PTR5A-13
FLR8LDCU+	BKR5EK	FR7DPP22U	PFR6N-11	H10B	BP4FS	HR7MPP22U	PTR5A-13
FLR8LDU+	BKR5EK	FR7DPP33	PFR6Q	H10BC	BP4FS	HR8A	BR5FS
FQR8LEU2	ZFR5F	FR7DPX	BCPR6ES-11	H2CS	B9EFS	HR8AC	BR5FS
FR10DCX	BCPR4ES-11	FR7HCOX	ZFR5E-11	H5DC	BP7EFS	HR8AP	BR5FS
FR10DX	BCPR4ES-11	FR7HPP222	PZFR5D-11	H5DP	BP7EFS	HR8APY	BR5FS-15
FR5DC	BCPR7ES	FR7KCW	BKR5EY	H6B	BP6FS	HR8AY	BR5FS-15
FR5DP	BCPR7ES	FR7KCW	BKR5EYA	H6BC	BP6FS	HR8B	BPR5FS
FR5DPP222	IFR7G-11	FR7KCW	BKR6EYA	H6D	BP6EFS	HR8BCY	BPR5FS-15
FR5DPP222	IZFR6K-11	FR7KCX	BKR5EYA-11	H6DC	BP6EFS	HR8BP	BPR5FS
FR5DPP222	PFR6B	FR7KCX	BKR6EYA-11	H6DP	BP6EFS	HR8BPX	BPR5FS-11
FR5DPP222	PFR6J-11	FR7LCX	ZFR5F-11	H7CP	B6EFS	HR8BPY	BPR5FS-15
FR5DTC	BCP7ET	FR7LCX	ZFR5J-11	H7D	BP6EFS	HR8BY	BPR5FS-15
FR6DC	BCPR6ES	FR7LCX	ZFR6A-11	H7DC	BP6EFS	HR8LCO	SR5
FR6DCX	BCPR6ES-11	FR7LCX	ZFR6F-11	H7DCY	BP6EFS-13	HR8LCO	TR5-1
FR6DPP22U	PFR6T-10G	FR7LCX	ZFR6F-11	H7DP	BP6EFS	HR8LPO	SR5
FR6DPP332	PFR6B	FR7LDC	BKR6EK	H7DPY	BP6EFS-13	HR9A	BR5FS
FR6DPP33X	BKR6EP-11	FR7LDC	BKR6EKC	H8B	BP5FS	HR9AC	BR5FS
FR6DPP33X	IFR6A-11	FR7LDC+	BKR6EK	H8BC	BP5FS	HR9ACY	BR5FS-15
FR6DPP33X	IFR6E-11	FR7LDC+	BKR6EKB-11	H8BP	BP5FS	HR9AP	BR5FS
FR6DPP33X	PFR6A-11	FR7LDC+	BKUR6EK	H8DC	BP5EFS	HR9AY	BR5FS-15
FR6DPP33X	PFR6G-11	FR7LDC+	BKUR6ET-10	H8DCX	BP5EFS-13	HR9B	BPR4FS
FR6DPX	BCPR6ES-11	FR7LD+	BKR6EK	H8DP	BP5EFS	HR9BC	BPR4FS
FR6DTC	BCPR6ET	FR7ME	LF6A-11	H9BC	BP4FS	HR9BCY	BPR4FS-15
FR6MPP10	LF6AP	FR7NPP332	ILZFR6D-11	H9BCY	BPR4FS-15	HR9BPX	BPR4FS-11
FR6MPP10	PLFR6A	FR7NPP332	ILZFR6D-11	H9DC	BP5EFS	HR9BPY	BPR4FS-15
FR6MPP332	ILFR6A	FR8DC	BCPR5ES	H9HP	BP5EFS	HR9BY	BPR4FS-15
FR6MPP332	ILFR6A	FR8DCX	BCPR5ES-11	HGR6KQC	BUR6EFSZ	HR9D	BPR5EFS
FR78	BKR6EQUP	FR8DC+	BKR5ES	HR10A	BR5FS	HR9DC	BPR5EFS
FR78X	BCPR6ET	FR8DPP33	PFR5J-11	HR10AC	BR5FS	HR9DCX	BP5EFS-13
FR7DC	B6EFS	FR8DPX	BCPR5ES-11	HR10ACY	BR5FS-15	HR9DPY	TR55IX



SPARK PLUG CONVERSION CHART

Bosch to **NGK**




Bosch	NGK
HS5E	BM7F
HS8E	BM6F
M10A	A-6
M10AC	A-6
M10ACO	A-6
M10AO	A-6
M12B	AP5FS
M4A	A-7
M4A1	A-8
M5A	A-7
M5AC	A-7
M7A	A-6
M7AC	A-7
M8A	A-6
M8AC	A-6
M8AO	A-6
UR2AS	CR8HS
UR3AC	CR7HSA
UR3AS	CR7HS
UR3CC	CR7E
UR4AS	CR6HS
UR6DE	PMR7A
VR8SE	LZKAR7A
VR8SEW	LZKAR7A
W10A	B-4H
W10AC	B-4H
W10C	B4ES
W10CC	B4ES
W10D	BP4ES
W10DC	BP4ES
W10E	B-4
W10F	BP-4
W10FC	BP-4
W12A	B-4H
W12E	B-2
W2A	B9HS
W2AC	B9HS
W2CC	B9ES
W2CO	B9ES
W2CS	B9EV
W2D	BP9ES
W3A	B8HS
W3AC	B8HS
W3AO	B8HS
W3AP	B8HS

Bosch	NGK
W3C	B8ES
W3CC	B8ES
W3CP	B8ES
W3CS	B8EV
W3DP	BP8ES
W3DP2	BP8ES
W4A	B8HS
W4A1	B8HS
W4A2	B8HS
W4AC	B8HS
W4AP	B8HS
W4AS	B8HV
W4C	B8ES
W4C1	B8ES
W4C3	B7HS
W4CC	B8ES
W4CP	B8EV
W4CPX	B8ES-11
W4CS	B8EV
W4DP	BP7ES
W4DPO	BP7ES
W4E2	B7S
W5A	B7HS
W5AC	B7HS
W5AP	B7HS
W5AS	B7HV
W5B	BP7HS
W5BP	BP7HS
W5C	B7ES
W5CC	B7ES
W5CCX	B7ES-11
W5CP	B7ES
W5CS	B7EV
W5D	BP7ES
W5DC	BP7ES
W5DCO	BP7ES
W5DCX	BP7ES-11
W5DP	BP7ES
W5DPO	BP7ES
W5DPX	BP7ES-11
W5DTC	BP6ET
W5E	B7S
W5EP	B7S
W6AS	B6HV
W6B	BP6HS

Bosch	NGK
W6BC	BP6HS
W6BP	BP6HS
W6D	BP6ES
W6D1	BP6ES
W6DC	BP6ES
W6DCO	BP6ES
W6DCX	BP6ES-11
W6DP	BP6ES
W6DPO	BP6ES
W6DPO	BP6ES
W6DPX	BP6ES-11
W6DTC	BP6ET
W7A	B6HS
W7AC	B6HS
W7AO	B6HS
W7AP	B6HS
W7B	BP6HS
W7BC	BP6HS
W7BP	BP6HS
W7C	B6ES
W7CC	B6ES
W7CCO	B6ES
W7CP	B6ES
W7CPX	B6ES-11
W7CX	B6ES-11
W7D	BP6ES
W7DC	BP6ES
W7DCO	BP6ES
W7DCR	BPR6ES
W7DCX	BP6ES-11
W7DO	BP6ES
W7DP	BP6ES
W7DPX	BP6ES-11
W7DTC	BP6ET
W7DX	BP6ES-11
W7E	B6S
W7EC	B6S
W7EP	B6S
W7F	BP6S
W7FC	BP6S
W8A	B5HS
W8AC	B5HS
W8AO	B-4H
W8AO	B5HS
W8AP	B5HS

Bosch	NGK
W8BC	BP5HS
W8BP	BP5HS
W8C	B5ES
W8CCX	B5ES-11
W8CO	B5ES
W8CP	B5ES
W8DC	BP5ES
W8DCO	BP5ES
W8DCX	BP5ES-11
W8DCY	BP5ES-13
W8DP	BP5ES
W8DPX	BP5ES-11
W8DTC	BP5ET
W8DX	BP5ES-11
W8E	B6S
W8EC	B6S
W8F	BP5S
W8FC	BP5S
W8LCR	ZGR5A
W8LCR	ZGR5A
W8LDCR	BUR6ET
W8LPR	ZGR5A
W9AC	B5HS
W9C	B4ES
W9CC	B4ES
W9DC	BP5ES
W9DCX	BP5ES-11
W9DPX	BP5ES-11
W9E	B-4
W9EC	B5S
W9ECO	B4LM
W9EO	B4-LM
W9F	BP5S
W9LC	ZGR5A
WA200TR30	BPR6EFS
WAK145T3	BM6F
WEA	BUH
WEC	BUE
WKA145T6	BPM6A
WKA200TR6	BPMR6A
WKA225T6	BPM7A
WO6AS	B10HV
WO6CS	B11EGV
WO7AS	B10HV
WO7CS	B10EGV



SPARK PLUG CONVERSION CHART

Bosch to **NGK** • Brisk to **NGK**



Bosch	NGK
WO8AS	B9HV
WP9FP	BPR5S
WR10A	BR4HS
WR10AC	BR4HS
WR10E	BR6S
WR10F	BP4
WR10F	BPR4S
WR10FC	BPR4S
WR10FCY	BPR4S-15
WR11EO	BR4LM
WR4AC	BR8HS
WR4AC	BR8HS
WR4CC	BR8ES
WR4CP	BR8ES
WR5A	BR7HS
WR5AC	BR7HS
WR5CC	BR7ES
WR5CP	BR7ES
WR5D	BPR7ES
WR5DC	BPR7ES
WR5DC+	BPR7ES
WR5DP	BPR7ES
WR5DS	BPR7EV
WR5D+	BPR7ES
WR6D	BPR6ES
WR6DC	BPR6ES
WR6DCX	BPR6ES-11
WR6DC+	BPR6ES
WR6DPX	BPR6ES-11
WR7A	BR6HS
WR7AC	BR6HS
WR7B	BPR6HS
WR7BC	BPR6HS
WR7BP	BPR6HS
WR7B+	BPR6HS
WR7C	BR6ES
WR7CC	BR6ES
WR7CCX	BR6ES-11
WR7CP	BR6ES
WR7CPX	BR6ES-11
WR7D	BPR6ES
WR7DC	BPR6ES
WR7DCX	BPR6ES-11
WR7DCX+	BPR6ES-11
WR7DC+	BPR6ES

Bosch	NGK
WR7DP	BPR6ES
WR7DS	BPR6EV
WR7D+	BPR6ES
WR7F	BPR6S
WR8AC	BR5HS
WR8C	BR5ES
WR8CC	BR5ES
WR8CP	BR5ES
WR8D	BPR5ES
WR8DC	BPR5ES
WR8DCO	BPR5ES
WR8DCX	BPR5ES-11
WR8DCX+	BPR5ES-11
WR8DP	BPR5ES
WR8DPX	BPR5ES-11
WR8DPY	BPR5ES-15
WR8DS	BPR5EV
WR8D+	BPR5ES
WR8EC	BRBR6S
WR8EP	BR6S
WR8F	BPR5S
WR8FC	BPR5S
WR8FP	BPR5S
WR8FPY	BPR5S-15
WR8HP	ZGR5C
WR9C	BR5ES
WR9CC	BR5ES
WR9DC	BPR5ES
WR9DCY	BPR5ES-15
WR9DP	BPR5ES
WR9DPX	BPR5ES-11
WR9DS	BPR5EV
WR9DY	BPR5ES-15
WR9E	BR6S
WR9EC	BR6S
WR9EO	BR6S
WR9FC	BPR5S
WR9FCY	BPR5S-15
WR9FPY	BPR5S-15
WR9FY	BPR5S-15
WR9HC	ZGR5C
WR9HP	ZGR5C
WR9LS	ZGR5A
WRS5F	BPMR7A
WS5E	BM7A


Bosch	NGK
WS5F	BPM7A
WS7E	BM6A
WS8E	BM6A
WS8F	BPM6A
WSR6F	BPMR6A
WSR8F	BPMR6A
WSR9E	BMR4A
X5DC	D7EA
XR2AS	DR8HS
XR2CS	DR8ES
XR4AS	DR8HS
XR4CS	DR9EA
XR4DC	DR8EA
XR5DC	DR7EA
XR7LDC	DPR7EA-9
Y7LPP332W	IZKR7B
Y7MPP33	PLKR6A
Y7MPP33	PLKR6A
YR5DDE	KR9CI
YR5DDE	KR9CI
YR7DE	DCPR7E-N
ZR8TPP15	LF5B
ZR8TPP15	LF5B

Brisk	NGK
J17	B4LM
J19	B2LM
JR17	BR4LM
JR19	BR2LM
K15YC	BP6S
K17C	B6S
N14Y	BP6HS
N14YC	BP7HS
NR15YC	BPR6HS
P15Y	BPM7A
P17	BM6A
PR15Y	BPMR7A
PR17Y	BPMR6A



SPARK PLUG CONVERSION CHART

Champion to **NGK**



Champion **NGK**

2071	FR4
860	A6FS
A10	D7EA
A57R	R2525-10
A59G	D9EV
A5YC	DP9EA-9
A6	D8EA
A61	D9EA
A61G	D9EV
A6Y	DP8EA-9
A6YC	DP8EA-9
A8	D7EA
A8Y	DP7EA-9
A8YC	DP7EA-9
BL11Y	BP5FS
BL13Y	BP5FS
BL4	B7FS
BL5	B7FS
BL6	B6FS
BL7Y	BP7FS
BL8	B6FS
BL9Y	BP6FS
BN12Y	BP5EFS
BN6Y	BP7EFS
BN89Y	BP6EFS
BN9Y	BP6EFS
C10YCC	BCP6ES
C281YC	BCP6ES
C53	R7234-10
C55	R7435-10
C57	R7436-9
C57	R7436-9
C57C	R7436-9
C57CX	R7434-10
C57YC	R7435-9
C59	R7436-9
C59C	R7436-9
C59YC	R7435-9
C61	R7436-8
C6BYC	BCP7ET
C6YCC	BCP7ES
C7Y	BCP7ES
C7YC	BCP7ES
C7YCC	BCP7ES
C9Y	BCP6ES




Champion **NGK**

C9YC	BCP6ES
C9YCC	BCP6ES
C9YCX	BCP6ES
CJ11	BM6A
CJ3	BM7A
CJ6	BM7A
CJ6Y	BPM7A
CJ7Y	BPM7A
CJ8	BM6A
CJ8Y	BPM6A
D14	A-6
D16J	A-6
D16J	A5FS
D21	A-6
D6	A-8
D9	A-6
D9J	A-6
DJ6J	BM7F
DJ7Y	BPM6F
DJ8J	BM6F
F-82	A-8F
F10	A6FS
F10C	A6FS
F11Y	AP5FS
F11YC	AP5FS
F14Y	AP5FS
F62Y	AP8FS
F7YC	AP7FS
F7YCC	AP7FS
F81Y	AP8FS
F83Y	AP8FS
F9Y	AP6FS
F9YC	AP6FS
G1	C9E
G2	C8E
G55	C9E
G58	C9E
G61	C8E
G63	C8E
H03	B6S
H10	B-6L
H10C	B6L
H10J	B-6L
H11	B-4L
H12	B-4L




Champion **NGK**

H8J	B-6L
J10Y	BP6S
J11	B-4
J11J	B-4
J11J	B-4
J11Y	BP5S
J12J	B-2
J12Y	BP5S
J12YC	BP5S
J12YC	BP5S
J13Y	BP5S
J14Y	BP5S
J14YC	BP5S
J17LM	B4-LM
J18YC	BP-4
J19LM	B2-LM
J2J	B9S
J4C	B7S
J4J	B7S
J6	B6S
J6C	B6S
J6C	B6S
J6J	B6S
J7	B6S
J7J	B6S
J8C	B6S
K-8	A-8
K15J	A-6
K2G	A9V
K3G	A8V
K5G	A8V
K8G	A8V
K9	A-7
KC8ZPYPB4	PZFR5D-11
L10	B6HS
L12Y	BP5HS
L14	B-4H
L15Y	BP4HS
L19V	BUH
L288	B5HS
L3G	B8HV
L4G	B7HV
L4J	B7HS
L5	B7HS
L55G	B10HV



Champion **NGK**

L61Y	BP8HS
L64Y	BP7HS
L66Y	BP6HS
L6G	B7HV
L76V	BUHW
L77J	B9HS
L77J4	B9HS-10
L77JC4	B7HS-10
L77V	BUHW
L78	B8HS
L78C	B8HS
L78V	BUHW-2
L7J	B6HS
L81	B7HS
L81Y	BP7HS
L82	B6HS
L82C	B6HS
L82Y	BP7HS
L82YCC	BP7HS
L85	B6HS
L86	B6HS
L86C	B6HS
L86CC	B6HS
L87Y	BP6HS
L87YC	BP6HS
L87YCC	BP6HS
L88A	B5HS
L89CM	BP5HS
L92Y	BP5HS
L92YC	BP5HS
L95Y	BP4HS
L9J	B6HS
N1	B10ES
N10PY	BP6EV
N10Y	BP6ES
N10Y4	BP6ES-11
N11Y	BP5ES
N11YC4	BP5ES-11
N11YCC	BP5ES
N12Y	BP5ES
N12YC	BP5ES
N13L	ZGR5C
N13Y	BP5ES
N14Y	BP5ES
N16Y	BP4ES



SPARK PLUG CONVERSION CHART

Champion to **NGK**




Champion	NGK	Champion	NGK	Champion	NGK	Champion	NGK
N16YC	BP4ES	N7YCC	BP7ES	QL16V	BUZ8H	RBN9Y	BPR6EFS
N178B	B8EM	N7YCX	BP7ES	QL76V	BUHZW	RC10DMC	BKR5EK
N180B	B7EM	N8	B6ES	QL77CC	BR8HS	RC10PYP4	PFR5G-11
N19V	BUE	N80	B10EG	QL77J4	BR9HS-10	RC10PYP4	PFR5J-11
N2	B9ES	N80G	B11EGV	QL78V	BUZHW-2	RC10PYPB4	PFR5G-11
N21	B4ES	N82	B10EG	QL78YC	BPR7HS	RC10YC	BCPR6ES
N279YC	BP7ES	N82G	B105EGV	QL7J5	BR6HS	RC10YC4	BKR6E-11
N281YC	BP6ES	N84	B9EG	QL81Y	BPR7HS	RC11PYPB4	PFR6N-11
N288	B5ES	N84G	B95EGV	QL82YC	BPR7HS	RC12ECC	FR5-1
N2C	B9ES	N86	B9EG	QL86	BR6HS	RC12LYC	FR5-11
N2G	B9EV	N86G	B9EGV	QL87YC	BPR6HS	RC12MC4	PZFR5F-11
N3C	B8ES	N87	B8EG	QN2	BR9ES	RC12MC5	ZFR5F-11
N3G	B8EV	N87G	B8EGV	QN2C	BR9ES	RC12MCC4	ZFR5F-11
N4	B7ES	N8GY	BP6EV	QN2G	BR9EV	RC12MCC4	ZFR5F-11
N4C	B7ES	N8L	ZGR5C	QN86	BR8EG	RC12YC	BCPR5ES
N4G	B7EV	N8Y	BP6ES	R 10	D6EA	RC12YC	BKR5ES
N4YC	BP9ES	N9BMC	BPR5EKU	R 6	D8EA	RC12YC5	FR45
N5	B6ES	N9BYC	BP6ET	R6G	D8EV	RC12YCC	BKR5E
N54R	B10EG	N9Y	BP6ES	R 8	D7EA	RC12YCC4	BKR5E-11
N57	B10ES	N9YC	BP6ES	RA2HC	DPR9EA-9	RC14YC	BKR5ES
N57G	B105EGV	N9YC4	BP6ES-11	RA4HC	DCPR9E	RC6YC	BCPR7ES
N57R	B10EG	N9YCC	BP6ES	RA4HCC	DCPR8E	RC78PYP	PFR7G-11
N59G	B95EGV	N9YCX	BP6ES	RA59GC	DCR9EIX	RC7BYC4	BCPR6ET
N5C	B6ES	OBL9Y	BPR6FS	RA6Y	DPR8EA-9	RC7Y	BCPR7ES
N5G	B6EV	OJ11Y	BPR6S	RA6YC	DPR8EA-9	RC7YC	BCPR7ES
N6	B6ES	OJ12Y	BPR5S	RAX92DC	JR9C	RC7YC4	BKR7E-11
N60	B9ES	OJ13Y	BPR5S	RAX92YC	DPR9EA-9	RC7YCC	BCPR7ES
N60R	B8EG	ON11Y	BPR5ES	RAX94C	DR8EA	RC87LYC	BKR6E
N60Y	BP10ES	ON12Y	BPR5ES	RAX94YC	DPR8EA-9	RC89YCC	BKR6ES
N62R	B8EG	ON3	BR8ES	RAX96C	DR7EA	RC8DMC	BKR6EK
N63Y	BP9ES	P10Y	D6HA	RAX96YC	DPR7EA-9	RC8PYCB	PFR6G-11
N64Y	BP8ES	P7G	D8HV	RBL11Y	BPR5FS	RC8PYP	PFR6J-11
N65Y	BP7ES	P8G	D6HV	RBL11Y6	BPR5FS-15	RC8PYPB4	PFR6G-11
N66Y	BP6ES	P8Y	D6HA	RBL12-6	BR5FS-15	RC8VTYC4	BKUR6ET-10
N6Y	BP8ES	PG2PHP	PMR8A	RBL13Y	BPR5FS	RC8YC	BKR6E
N6YC	BP8ES	PG4PHP	PMR7A	RBL13Y6	BPR5FS-15	RC8YC4	BKR6E-11
N6YCC	BP8ES	PG4PHP	PMR7A	RBL15Y	BPR4FS	RC8YCL	BKR6EZ
N7	B7ES	PG4PHP	PMR7A	RBL15Y4	BPR4FS-11	RC9BMC	BKR5EKU
N74C	B6EB-11	PRZ9HC	CR7HSA	RBL16Y	BPR4FS	RC9MC4	ZFR5F-11
N79Y	BP6ES	QC10PEP	PZFR6H	RBL17Y	BPR4FS	RC9MCC	ZFR6F
N7BYC	BP6ET	QC12PEP	PZFR6H	RBL8	BR6FS	RC9MCC4	ZFR6F-11
N7BYC	BUR6ET	QC12PEP	PZFR6H	RBL8-6	BR6FS-15	RC9MCC4	ZFR6F-11
N7GY	BP7EV	QC12YC	BKR5E	RBN12Y	BPR5EFS	RC9YC	BCPR6ES
N7Y	BP7ES	QC59C	BCR8ES	RBN13Y	BPR5EFS	RC9YC4	BCPR6ES-11
N7YC	BP7ES	QJ19LM	BR2LM	RBN14Y	BPR5EFS	RC9YCC	BCPR6ES



SPARK PLUG CONVERSION CHART

Champion to **NGK**




Champion	NGK
RC9YCC4	BCPR6ES-11
RCJ6	BMR7A
RCJ6Y	BPMR7A
RCJ7Y	BPMR7A
RCJ7Y	BPMR7A
RCJ8	BMR6A
RD14	AR-6
RD16	AR-6
RD16J	AR-6
RD9	AR-6
RDJ6J	BMR7F
RDJ7J	BMR6F
RE10LC	SR5
RE14MCC5	LZTR4A-11
RE14MCC5	LZTR4A-11
RE14PLP5	LZTR5AIX-13
RE16MC	LZTR4A-11
RE7PYC5	PTR5A-13
REA8MCL	LZKAR7A
REC10PYC4	LF5AP-11
REC10PYC4	LF5AP-11
REC10YC4	LF5A-11
REC9YCL	LF5B
RER8YC	LKR6D
RES9PYP4	PTR5A-10
RES9YCC4	PTR5A-10
RF10	AR6FS
RF11Y	APR6FS
RF12	AR5FS
RF12-5	AR5FS-11
RF14Y	APR5FS
RF7YC	APR6FS
RF9Y5	APR6FS-11
RF9YC	APR6FS
RFN14LY	ZF4A-11
RG4HC	CR9EB
RG6YC	CPR8E
RG6YCH	CPR8E
RG94C	CR8EH-9
RGU92C	CR9EH-9
RJ10Y	BPR6S
RJ11	BR6S
RJ11Y	BPR5S
RJ12Y	BPR5S
RJ12Y6	BPR5S-15

Champion	NGK
RJ12YC	BPR5S
RJ12YC6	BPR5S-15
RJ14Y	BPR5S
RJ14YC	BPR5S
RJ18Y	BPR4S
RJ18Y6	BPR4S-15
RJ18YC	BPR4S
RJ18YC6	BPR4S-15
RJ20Y	BPR4S
RJ6	BR6S
RJ6C	BR6S
RJ6J	BR6S
RJ7	BR6S
RJ8	BR6S
RJ8C	BR6S
RJ8J	BR6S
RL12Y	BPR6HS
RL19	BR5HS
RL4J	BR7HS
RL77J	BR9HS
RL78	BR8HS
RL78C	BR8HS
RL7J	BR6HS
RL82	BR6HS
RL82C	BR6HS
RL82Y	BPR7HS
RL82YC	BPR6HS
RL85	BR6HS
RL86	BR6HS
RL86C	BR6HS
RL87Y	BPR6HS
RL87YC	BPR6HS
RL87YC	BPR6HS
RL95YC	BPR5HS
RL95YC	BPR6HS
RN10GY	BPR6EV
RN10Y	BPR6ES
RN10Y4	BPR6ES-11
RN11Y	BPR5ES
RN11YC	BPR5ES
RN11YC4	BPR5ES-11
RN11YCC	BPR5ES
RN12GY	BPR5EV
RN12Y	BPR5ES
RN12YC	BPR5ES

Champion	NGK
RN12YC4	BPR5ES-11
RN12YCC	BPR5ES
RN14LY	ZGR5C
RN14PMP5	BPR5EP-11
RN14Y	BPR5ES
RN14Y6	BPR5ES-15
RN16Y	BPR4ES
RN2	BR9ES
RN2C	BR9ES
RN2G	BR9EV
RN4	BR7ES
RN4C	BR7ES
RN5	BR6ES
RN6	BR6ES
RN6Y	BPR8ES
RN6YC	BPR8ES
RN74C	BR6EB-11
RN7GY	BPR7EV
RN7Y	BPR7ES
RN7YC	BPR7ES
RN7YCC	BPR7ES
RN8	BR5ES
RN8L	ZGR5C
RN9GY	BPR6EV
RN9Y	BPR6ES
RN9YC	BPR6ES
RN9YC4	BPR6ES-11
RN9YCC	BPR6ES
RP7	DR8HS
RS10LC	TR5-1
RS12PYP	TR55IX
RS12YC	BPR5EFS
RS12YC6	BPR5EFS
RS13LYC	TR4-2
RS14YC	BPR5EFS
RS14YC	BPR5EFS
RS5C	BR7EFS
RS7YC	BPR7EFS
RS9YC	BPR6EFS
RS9YCC	BPR6EFS
RV12C6	BR5FS-15
RV12YC	BPR5FS
RV12YC6	BPR5FS-15
RV15YC	BPR4FS
RV15YC4	BPR4FS-11

Champion	NGK
RV15YC6	BPR4FS-15
RV17YC	BPR4FS
RV8C	BR6FS
RV8C6	BR6FS-15
RV9YC	BPR6FS
RZ96C	CR7HSA
RZN12Y5	BPR5EFS
S12YC	BP5EFS
S279YC	BP6EFS
S281YC	BP6EFS
S379YC	BP7EFS
S7YC	BP7EFS
S9YC	BP6EFS
UD16	A-6
UJ12	B-2
UJ2J	B8S
UJ4J	B7S
UJ6	B6S
UJ8	B6S
UJ81C	B7S
UK10	A-6
UL4J	B7HS
UL77V	BUHXW-1
UL81C	B7HS
UL81J	B7HS
UN79Y	BP6ES
V12YC	BP5FS
V4C	B7FS
V9YC	BP6FS
W14	G-2Z
XC12PEPB	PZFR6H
Y82	CM-6
Z10	C6HSA
Z10G	C7HV
Z12	C6HSA
Z6	C8HSA
Z9Y	C7HSA



SPARK PLUG CONVERSION CHART

Denso to **NGK**




Denso	NGK	Denso	NGK	Denso	NGK	Denso	NGK
FXE24HR11	DF8H-11B	J16A-U11	BE527Y-11	K22P11	BK7EK-N-11	P16PR8	PGR5A
IK16	BKR5EIX-11	J16AR-U11	BRE527Y-11	K22PB	BKUR7ET	P16R	BPR5EP-11
IK20	BKR6EIX-11	J16AY	BP5EJ	K22PBR-S	BKUR7ET	P16R13	BPR5EP-13
IK22	IRIWAY7	J16AYR	BPR5EJ	K22PR-L11	BKR7E-N-11	P20PR11	PGR6A-11
IK24	IRIWAY8	J16B-U11	BE529Y-11	K22PR-TP11	BKR7EVX-11	P20R11	BPR6EP-11
IK24C11	FR8BI-11	J16BR-U	BRE529Y	K22PR-U	BKR7E	P20R8	BPR6EP-8
IK27	IRIWAY9	J16C-U	ZGR5E	K22PR-U11	BKR7E-11	P22PR8	PGR7A
IK27C	FR9BI-11	J20AY	BP6EJ	K22PR-ZU	BKR7EVX	PK16PR-L11	PFR5G-11
IKH16	LF85AIX-11	K14PR-U11	BKR4E-11	K22TM11	BK7EK-N-11	PK16PR-P11	PFR5J-11
IKH20	LF86AIX-11	K16-U	BKR5EYA	K22TMR	BKR7EKC-N	PK16PR11	PFR5B-11
IQ16	BCPR5EIX-11	K16-U11	BKR5EYA-11	K22TMR11	BKR7EKC-N-11	PK16R11	BKR5EP-11
IQ20	BCPR6EIX-11	K16GPR-U11	ZFR5E-11	K22TNR	BKR7EKC	PK16R8	BKR6EP-8
IQ22	IRITOP7	K16HPR-U11	LF85A-11	K22TNR-S	BKUR7EK	PK16TR11	BKR5EKP-11
IQ24	IRITOP8	K16P-U	BK5E	K24PR-U11	BKR8E-11	PK16TR13	BKR5EKP-13
IQ27	IRITOP9	K16PR-L11	BKR5EN-11	KJ14CR-L11	ZFR4F-11	PK20GR8	BKR6EPA-8
IT16	TR5IX	K16PR-P11	BKR5EVX-11	KJ14CR11	ZFR4F-11	PK20PR-L11	PFR6G-11
IT20	TR6IX	K16PR-TP11	BKR5EVX-11	KJ16CR	ZFR5F	PK20PR-L11	PFR6G-11
IT22	TR7IX	K16PR-U	BKR5E	KJ16CR-L11	ZFR5F-11; ZFR5J-11	PK20PR-L13	PFR6G-13
IT24	TR8IX	K16PR-U11	BKR5E-11	KJ16CR-ULL	ZFR5F-11	PK20PR-P	PFR6J
ITF16	UR5IX	K16PR-ZU11	BKR5EVX-11	KJ16CR11	ZFR5J-11	PK20PR-P11	PFR6J-11
ITF20	UR6IX	K16TR11	BKR5EKB-11	KJ20CR-L11	ZFR6F-11; ZFR6J-11	PK20PR-P8	PFR6J
IU22	CR7EIX	K20-U	BKR6EYA	KJ20CR-U11	ZFR6F-11	PK20PR-TP	PFR6M
IU24	CR8EIX	K20-U11	BKR6EYA-11	KJ20CR11	ZFR6J-11	PK20PR11	PFR6B-11
IU27	CR9EIX	K20DTR-S11	ZFR6G	KJ20DR-M11	ZFR6K-11	PK20R-P8	BKR6EP-N-8
IU27D	CR9EIA-9	K20HR-U11	LF86C-11	KJ22CR-L11	ZFR7F-11	PK20R11	BKR6EP-11
IUF22	CR7HIX	K20P-U	BK6E	KJ22CR-L8	ZFR7F	PK20R13	BKR6EP-13
IUF24	CR8HIX	K20PBR	BKUR6ET	KJ22CR11	ZFR7F-11	PK20R8	BKR6EP-8
IUH24	CR8EHIX-9	K20PBR-S10	BKUR6ET-10	LP20-U	BP6EY	PK20TR11	BKR6EKP-11
IUH27	CR9EHIX-9	K20PR-L11	BKR6EN-11	LP20R-U	BPR6EY	PK22PR-L11	PFR7G-11
IW16	BPR5EIX-11	K20PR-L11	BKR6EN-11	M17	A-6	PK22PR-TP	PFR7M
IW20	BPR6EIX-11	K20PR-TP11	BKR6EVX-11	M22	A-7	PK22PR11	PFR7B-11
IW22	BPR7EIX	K20PR-U	BKR6E	M24S	A-8	PK22PR8	PFR7B
IW24	BR8EIX	K20PR-U11	BKR6E-11	MA14P-U	AP4FS	PKJ16CR-L11	PZFR5F-11
IW27	BR9EIX	K20PR-ZU11	BKR6EVX-11	MA16P-U	AP5FS	PKJ16CR-L13	PZFR5F-13
IW31	BR10EIX	K20R-U	BKR6EYA	MA16PR-U	APR5FS	PKJ20CR8	PZFR5F
IWF22	BR7HIX	K20R-U11	BKR6EYA-11	MA17P-U	AP6FS	PKJ20CR-L11	PZFR6F-11
IWF24	BR8HIX	K20R-Z	BKR6EVX	MA20P-U	AP6FS	PKJ20CR8	PZFR6F
IX22B	DPR7EIX-9	K20R-ZU11	BKR6EVX-11	MA20PR-U	APR6FS	PQ16R	BCPR5EP-11
IX24	DR8EIX	K20TMR11	BKR6EKC-N-11	MA20R-U	AR6FS	PQ16R13	BCPR5EP-13
IX24B	DPR8EIX-9	K20TNR	BKR6EKC	MW17	AB-6	PQ16R8	BCPR5EP-8
IX27	DR9EIX	K20TNR-S	BKUR6EK	MW22	AB-7	PQ20R	BCPR6EP-11
IX27B	DPR9EIX-9	K20TNR-S9	BKUR6EK-9	MW9	AB-2	PQ20R-P11	BCPR6EP-N-11
IXU22C	DCPR7EIX	K20TR11	BKR6EKB-11	P16PR11	PGR5A-11	PQ20R-P8	BCPR6EP-N-8
IXU24	IRIMAC8	K20TXR	BKR6EKUB			PQ20R13	BCPR6EP-13
IXU27	IRIMAC9	K22P-U11	BK7E-11			PQ20R8	BCPR6EP-8



SPARK PLUG CONVERSION CHART

Denso to **NGK**




Denso	NGK
PT16EPR-C13	PTR5C-13
PT16EPR-L13	PTR5C-13
PT16VR13	PTR5A-13
PT16VR13	PTR5A-13
Q14R-U11	BCPR4EY-11
Q16-U	BCP5E
Q16-U11	BCP5EY
Q16-ZU11	BCP5EVX-11
Q16P-U11	BCP5E-11
Q16PR-TP11	BCPR5EVX-11
Q16PR-U	BCPR5E
Q16PR-U11	BCPR5E-11
Q16PR-ZU11	BCPR5EVX-11
Q16R-U	BCPR5EY
Q16R-U11	BCPR5EY-11
Q16R-ZU11	BCPR5EVX-11
Q20-U11	BCP6E-11
Q20-ZU11	BCP6E-11
Q20P-U	BCP6E
Q20P-U11	BCP6E-11
Q20PR-P11	BCPR6EVX-11
Q20PR-U	BCPR6E
Q20PR-U11	BCPR6EY-11
Q20PR-ZU11	BCPR6EVX-11
Q20R-U	BCPR6EY
Q20R-U11	BCPR6EY
Q20R-ZU11	BCPR6EVX-11
Q20U	BCP6E
Q22P-U	BCP7E
Q22P-U11	BCP7E-11
Q22PR-P11	BCPR7EVX-11
Q22PR-U	BCPR7E
Q22PR-U11	BCPR7E-11
Q22PR-ZU	BCP7EVX
Q22PR-ZU11	BCPR7EVX-11
QJ16AR-U	BCRE527Y
QJ16AR-U11	BCRE527Y-11
QJ16C11	ZFR5A-11
QJ16CR11	ZFR5A-11
QJ20C11	ZF6A-11
QJ20CR11	ZFR6A-11
QJ22CR11	ZFR7A-11
QL20PR-U	BCPR6ED
QL20TR-S	BCPR6EKD
QL22TR-S	BCPR7EKD

Denso	NGK
S-27	SD9A
S-29	SD10A
S-29A	SD10A
S-31A	SD11A
S22PR-A7	IGR7A
SF-10	BUHX
SF-24	BU8H
SF-50	BUHW
SF-51	BUHW-2
SK16PR-A11	IFR5E11
SK16PR-E11	BKR5EIX-11P
SK16PR-L11	IFR5G-11K
SK16R11	IFR5A11
SK20PR-A11	IFR6E11
SK20PR-A8	IFR6E
SK20PR-L9	IFR6C
SK20R11	IFR6A11
SK22PR-M11	IFR7G-11KS
SKJ16CR-L11	IZFR5F11
SKJ16DR-M11	IZFR5K11
SKJ20DR-M11	IZFR6K11
SKJ20DR-M13	IZFR6K13
SVK20RZ11	BKR6EIX-11
SVK20RZ8	BKR6EIX-P
T14PR-U	BPR4FS
T14PR-U15	BPR4FS-15
T16-U15	BR5FS-15
T16EPR-U	BPR5EFS
T16EX-U	BP5EFS
T16P-U	BP5FS
T16PR-U	BPR5FS
T16PR-U11	BPR5FS-11
T16PR-U15	BPR5FS-15
T16R-U	BR5FS
T16R-U15	BR5FS-15
T20EP-U	BP6EFS
T20EP-U15	BPR6EFS-15
T20EPR-U	BPR6EFS
T20EPR-U15	BPR6EFS-15
T20EX-U	BP6EFS
T20P-U	BP6FS
T20PR-U	BPR6FS
T20R-U	BR6FS
T20R-U15	BR6FS-15
T22EP-U	BP7EFS

Denso	NGK
U14FS-UB	C4HSB
U14FSR-UB	CR4HSB
U16FS-L	C5HSA
U16FS-U	C5HSA
U16FS-UB	C5HSB
U16FSR-L	CR5HSA
U16FSR-U	CR5HSA
U16FSR-UB	CR5HSB
U17F	C5HSA
U20ESR-N	CR6E
U20FS	C6HSA
U20FS-L	C6HSA
U20FS-U	C6HSA
U20FSR-L	CR6HSA
U20FSR-U	CR6HSA
U20M-U	CM-6
U22ES-N	C7E
U22ESR-N	CR7E
U22ETR	CR7EK
U22FER9	CR7EH-9
U22FS	C7HSA
U22FS-GU	C7HV
U22FS-L	C7HSA
U22FS-U	C7HSA
U22FS-ZU	C7HVX
U22FSR-L	CR7HSA
U22FSR-U	CR7HSA
U24ES-N	C8E
U24ESR-N	CR8E
U24ESR-NB	CR8EB
U24ESR-NZU	CR8EVX
U24ETR	CR8EK
U24FE9	C8EH-9
U24FER-ZU9	CR8EHVX-9
U24FER9	CR8EH-9
U24FS	C8HSA
U24FS-C	LR8A
U24FS-L	C8HSA
U24FS-U	C8HSA
U24FS-ZU	C8HVX
U24FSR-C	LR8A
U24FSR-U	CR8HSA
U24FSR-ZU	CR8HVX
U27ES-N	C9E
U27ES-NZU	C9EVX

Denso	NGK
U27ESR-N	CR9E
U27ESR-NB	CR9EB
U27ESR-NZU	CR9EVX
U27ETR	CR9EK
U27FE-ZU9	C9EHVX-9
U27FE9	C9EH-9
U27FER-ZU9	CR9EHVX-9
U27FER9	CR9EH-9
U31ESR-N	CR10E
U31ETR	CR10EK
U31FER9	CR10EH-9
VK16	BKR5EIX-11P
VK16PRZ11	IFR5L11
VK20	BKR6EIX-11P
VK20PRZ11	IFR6L11
VK20T	BKR6EIX-LPG
VK20Y	BKR6EIX-P
VK22	BKR7EIX-P
VK22PRZ11	IFR7L11
VKA20	HB6AIX-11P
VKB20	HB6BIX-11P
VKH16	LF5AIX-11P
VKH20	LF6AIX-11P
VKH22	LF7AIX-P
VQ16	BCPR5EIX-11P
VQ20	BCPR6EIX-11P
VUH24Z	IMR8A-9H
VUH27D	IMR9C-9H
VUH27Z	IMR9A-9H
VW20T	BPR6EIX-LPG
VX22BZ	UR7A9
VXU22	DCPR7EIX-P
W14	B-4
W14-U	B-4
W14-U10	B-4-10
W14-US	B-4
W14E	B4ES
W14EKR-S11	BUR4EB-11
W14EP	BP4ES
W14EPR	BPR4ES
W14EPR11	BPR4ES-11
W14EX-U	BP4EY
W14EX-U11	BP4EY-11
W14EX-U13	BPR4ES-13
W14EX-ZU	BPR4EVX



SPARK PLUG CONVERSION CHART

Denso to **NGK** • EYquem to **NGK**



Denso	NGK
W14EXR-U	BPR4EY
W9	B-2
W9-U	B-2
W9EP	BP-2E
W9EPR	BPR-2E
W9EX-U	BPR2ES
W9EXR-U	BPR2ES
W9FP	BP-2H
W9FP-L	BP2HS
W9FP-UL	BP2HS
W9LM-US	B2-LM
W9LMR-US	BR2-LM
W9P	BP-4
W9P-U	BP-4
W9PR-U	BP-4
XU22PR9	DCPR7EA-9

Eyquem	NGK
1000	B8HS
1000 MOTO	B8HS
1000CM	B7S
1000L	B8ES
1000L MOTO	B8HS
1000M	B8HS
100M	B8HS
1100	B9HS
1100L	B8ES
1100L MOTO	B8ES
1150L	B9ES
200	B4H
202CT	B2LM
300AM	B4L
30AM	B4L
400J	BR5FS
406	BP6HS
450JS	BPR4FS-15
450L	B5ES
480CS	BP5S
500AM	B6L
500C	B6S
500CJT	BM6F
500CM	B6S
500CS	BP5S
500CT	BM6A
500J	BR6FS
500JS	BPR4FS
500M	B5HS
502 MOTO	B4H
502CT	B4LM
505JS	BP5FS
50AM	B6L
50M	B5HS
520CS	BP5S
550CS	BP5S
550JS	BPR5FS
550LS	BP5ES
550S	BP4HS
550S	BP4HS
580LS	BP5ES
580LS	BP5ES
580S	BP4HS
600CS	BP5S
600JS	BPR6FS


Eyquem	NGK
600L	B6ES
600LS	BP6ES
600S	BP5HS
700	B6HS
700 MOTO	B6HS
700CTS	BPM6A
705JS	BP7FS
705L	B6ES
705L MOTO	B6ES
705S	BP6HS
705S MOBY MOTO	B5HS
707LS	BP6ES
70M	B6HS
750	BP6HS
750L	B6ES
750LJS	BP6EFS
750LS	BP6ES
753LJS	BP6EFS
755	B6HS
755 MOTO	B6HS
755CJT	BM7F
755CM	B6S
755CT	BM7A
755L	B6ES
755L MOTO	B6ES
755LJS	BP6EFS
755LS	BP6ES
755LS MOTO	BP6ES
755M	B6HS
755S	BP6HS
75LM	B6ES
75M	B6HS
775SX	BP6HS
775X	B6HS
800L	B6ES
800LJS	BP6EFS
800LS	BP6ES
800LS MOTO	BP6ES
802L	B6ES
803LJS	BP6EFS
805L	B6ES
805L MOTO	B6ES
805LJS	BP7EFS
805LJSP	BP7EFVX
805LP	B8EVX



Eyquem	NGK
850	B7HS
850 MOT	B7HS
850LS	BP7ES
883LJP	B8EFS
C32	B5HS
C32LS	BP5ES
C32LS	BP5ES
C32S	BP5HS
C42LJS3	BP6EFS
C42S	BP6HS
C52LS	BP5ES
C62	B7HS
C62LJS	BP6EF
C62LJS	BP6EFS
C62LS	BP6E
C62LS	BP6ES
C62LS3X	BP5ET
C62S	BP7HS
C72LJS	BP7EFS
C72LS	BP7ES
C72LS3X	BP6ET
C82LJS	BP7EFS
C82LS3X	BP7ET
C92LS	BP8ES
D1000	D8HA
D1000 MOTO	D8HA
D1000L	D9EA
D1050L	D9EA
D755 MOTO	D6HA
D775	D6HA
D800L	D7EA
D800L MOTO	D7EA
D900L	D8EA
FC42LS	BCP5ES
FC52LS	BCP5E
FC52LS	BCP5ES
FC58LS	BCP6ES
FC62LS	BCP6ES
FC62LS2	BCP6ES
FC62LS3	BP6ET
FC62LS3X	BCP6ET
FC72LS	BCP7ES
FC82LS	BCP7E
FC82LS1	BCP7ES
FC82LS2	BCP7ES







SPARK PLUG CONVERSION CHART



Equyem to **NGK** • Motorcraft to **NGK**




 Equyem	 NGK
FN52LS	BK5ESZ
K200M	A6
K300J	A5FS
K300JS	AP5FS
K300M	A6
K350JS	AP5FS
K450JS	AP5FS
K500M	A6
K55JS	AP6FS
K600M	A6
K750M	A7
KC62JS	AP6FS
"R 1,000"	BR8HS
R1000L	BR8ES
R 850	BR7HS
RC32LS5	BPR4ES-11
RC42S	BPR6HS
RC52LS	BPR5EA
RC52LS5	BPR5EA-11
RC52LZ3EX	BUR5ET
RC52LZE	ZGR5A
RC58LZ3EX	BUR6ET
RC62HJSDP	PTR5A-13
RC62LJS	BPR6EFS
RC62LS	BPR6ES
RC62LS5	BPR6ES-11
RC62S	BPR7HS
RC82LS	BPR7ES
RC82LS5	BPR7EY-11
RFC42LS	BCPR5ES
RFC42LS2E	BKR5EK
RFC50LZ2E	BKR5EK
RFC52LS	BCPR5ES
RFC52LS3	BCPR5ET
RFC52LS5	BCPR5ES-11
RFC52LS5	BKR5E-11
RFC52LSP	BKR6EK
RFC52LZE	ZFR5F
RFC52LZK	BKR5EZ
RFC57LS3	BCPR6ET
RFC58LS	BKR6E
RFC58LS2E	BKR6EK
RFC58LS3	BCPR6ET
RFC58LS5	BCPR6ES-11
RFC58LS5	BKR6ES-11

 Equyem	 NGK
RFC58LSP	BKR6EZ
RFC58LZ	BKR6EY
RFC58LZ2	BKR6EKC
RFC58LZ2E	BKR5EZ
RFC58LZ3EX	BKUR6ET
RFC58LZ5	BKR6EY-11
RFC58LZE5	ZFR6F-11
RFC62LS3X	BCPR6ET
RFC62LS5	BCPR6ES-11
RFC62LZ3X	BKUR7ET
RFC82LS	BCPR7ES
RFC82LS5	BCPR7ES-11
RFN52HZ	LFR5B
RFN58HZ	LFR6B
RFN58LZ	BKR6EK
T850	C7HSA
XKC62JS	APR6FS

 Motorcraft	 NGK
A11	B2
A11NX	BM4A
A11U	B2
A11X	B2
A1CU	B8S
A21X	B8S
A22	BP6S
A22CU	BP6S
A22NX	BPM7A
A2NX	BM7A
A32	BP6S
A3CU	B6S
A3X	B6S
A42	BP5S
A42CU	BP5S
A5	B6S
A52	BP5S
A52CU	BP5S
A5CU	B6S
A5X	B6S
A7	B4
A7LM	B4LM
A7N	BM6A
A7NU	BM6A
A7NX	BM6A
A7U	B4
A7X	B4
A82	BP4
A9	B4
A901	B8S
A9X	B4
ABSP32C	BKR6E-11
AE1C	B7HS
AE1X	B7HS
AE2	B7HS
AE22	BP6HS
AE22C	BP6HS
AE2C	B7HS
AE2X	B7HS
AE3	B6HS
AE32	BP6HS
AE32C	BP6HS
AE3C	B6HS
AE3X	B6HS
AE4	B5HS



 Motorcraft	 NGK
AE42	BP5HS
AE4X	B5HS
AE6	B5HS
AE62	BP5HS
AE7	B4H
AE901	B9HS
AE901X	B9HS-10
AER32	BPR6HS
AER4	BR5HS
AER4X	BR5HS
AF12	BP7FS
AF2	B7FS
AF22	BP6FS
AF3	B6FS
AF3	B6S
AF32	BP6FS
AF3NX	BM7F
AF42	BP5FS
AF52	BP4FS
AF5NX	BM6F
AG1	B8ES
AG12	BP7ES
AG12C	BP7ES
AG12CU	BP7ES
AG1C	B8ES
AG1X	B8ES
AG2	B7ES
AG203	B11EGP
AG22	BP6ES
AG22-4	BP6ES-11
AG22C	BP6ES
AG22CU	BP6ES
AG23	B7ECS
AG252	BP6ES
AG252C	BP6ES
AG25C	B7EM
AGPR32C	BKR6E
AGSF22FE13J	PTR6F-13
AGSF32FM	PTR5F-13
AGSF32W	TR55IX
AGSP32FP	PFR5G-11
AGSP52	BKR5E
AWSF22C	BPR6EFS
AWSF32F	PTR5D-10
AWSF32F	TR55






SPARK PLUG CONVERSION CHART



Motorcraft to **NGK** • Torch to **NGK**

 Motorcraft	 NGK
AWSF32PP	PTR5D-10
AWSF32PP	PTR5D-10
AWSF42	BPR5EFS
AWSF42C	BPR5EFS
AYFS32CJ	TR5B-13
AYRF22P	PTR5A-13
AYRF22PP	PTR5A-10


 Torch	 NGK
A7RTC	CR7HSA
A7TC	C7HSA
D7	D7EA
D8RTC	DR8EA
D8TC	D8EA
DK7RTC	DCPR7E
E5C	B5HS
E5TC	BP5HS
E6C	B6HS
E6RTC	BPR6HS
E6TC	BP6HS
E7C	B7HS
E7RTC	BPR7HS
E7TC	BP7HS
E8C	B8HS
E8TC	BP8HS
F5C	B5ES
F5RTC	BPR4ES
F5TC	BP5ES
F6C	B6EC
F6RTC	BPR5ES
F6TC	BP6ES
F7C	B7ES
F7RTC	BPR7ES
F7TC	BP7ES
F7TJC	BP5ET
F8C	B8ES
F8TC	BP8ES
G6	B6S
K6RF	BKR5E
K6RTC	BCPR5ES
K6RTJC	BCPR6ET
K6TC	BCP5ES
K6TJC	BCP6ET
K7RTC	BCPR6ES
K7TC	BCP6ES
K7TJC	BCP7ET
L6	BM6A
L7	BM7A
L7RTC	BPMR7A
L7T	BPM6A
L7TC	BPM7A
L9T	BPM7A
T1137C	C7HSA
T5RTC	APR6FS

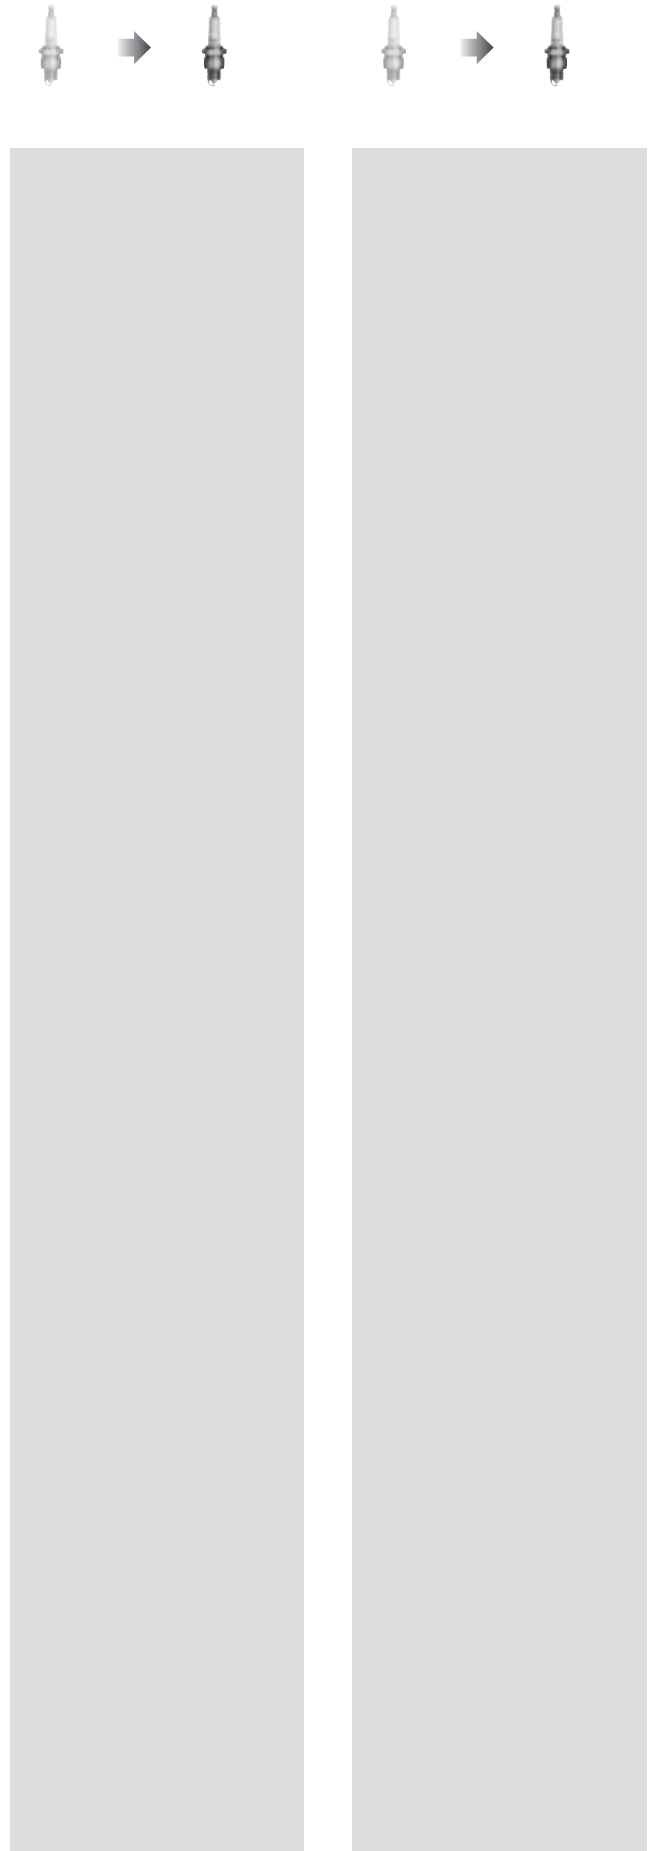



SPARK PLUG CONVERSION CHART

DISCONTINUED and REPLACEMENT PLUGS



SPARK PLUG



GLOW PLUG

DISCONTINUED	REPLACED
A6	AB6
A7	AB7
B6EFS	BR6EF
B6EVX	-
B6FS	BR6FS
B6HVX	BR6HIX
B7EVX	BR7EVX
B7HVX	BR7HIX
B8HSA	BP8HS
B9EGP	BR9EIX
BCP5E-11	BCPR5E-11
BCP5EY-11	BCPR5EY-11
BCP7E	BCPR7E
BCP7E-11	BCPR7E-11
BCPR5EP-13	BCPR5EIX-11
BCPR5EY-N-1	-
BCPR6EP-13	BCPR6EIX-11
BCPR6EP-N-1	BCPR6EIX-11
BK7EKU	BKR7EKU
BL-6H	-
BP5EA	BP4EY
BP5EA-11	BP4EY-11
BP5EVX	BPR5EVX
BP6EK-A	BPR6EK-A
BP6HVX	BPR6HIX
BP7HVX	BPR7HVX
BP8HSA	BPR8HSA
BP9HVX	BPR8HIX
BPR5EK-A	BPR5EIX-11
BPR5EVX	BPR5EIX
BPR5EVX-11	BPR5EIX-11
BPR6HVX	BPR6EIX
BPR7EVX	BPR7EIX
BPR7EY	BPR7EIX
BPR7HVX	BPR7HIX
BPR8EVX	BPR8EIX
BPR9EVX	BPR9EIX
BR7EVX	BR7EIX
BR8HVX	BR8HIX
BU6EA-11	BUR6EA-11
C7EH-9	CR7EH-9
DCP8EVX	DCPR8EVX
DR7ES	DR7EA
DPR7EVX-9	DPR7EIX-9
DR8EVX	DR8EIX
DR8E	DR8EA
DR8ES	DR8EA
DR9EVX	DR9EIX
PFR5A-11B	-
ZFR5FVX-11	ZFR5FIX-11

DISCONTINUED	REPLACED
CX01	CX51
CY53	CY03
Y-503R	Y-503J
Y-504R	Y-504J
Y-506R	Y-506J
Y-507R	Y-507J
Y-515J	Y-732J
Y-731U	Y-503J
Y-732U	Y-732J
Y-746R	Y-746J
Y-902R	Y-924J
Y-904M	Y-904M1
Y-908R	Y-924J
Y-910R	Y-910J
Y-911J	Y-910J
Y-911R	Y-910J
Y-913M	Y-913J
Y-914U	Y-924J
Y-916R	Y-916J
Y-917U	Y-924J
Y-918R	Y-918J
Y-920R	Y-924J
Y-922R	Y-924J
Y-923U	Y-924J
Y-924U	Y-924J
Y-925R	Y-925J
Y-927R	Y-927J
Y-932R	Y-933J
Y-933R	Y-933J
Y-935U	Y-910J
Y-937R	Y-937J
Y-938R	Y-924J